
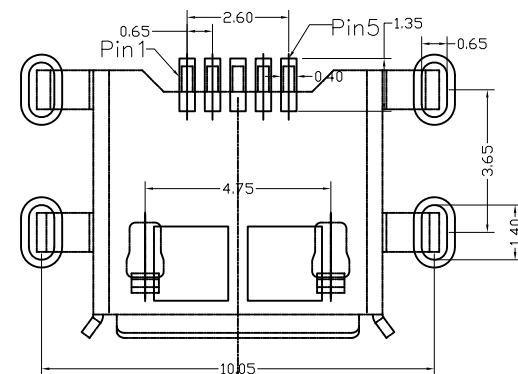


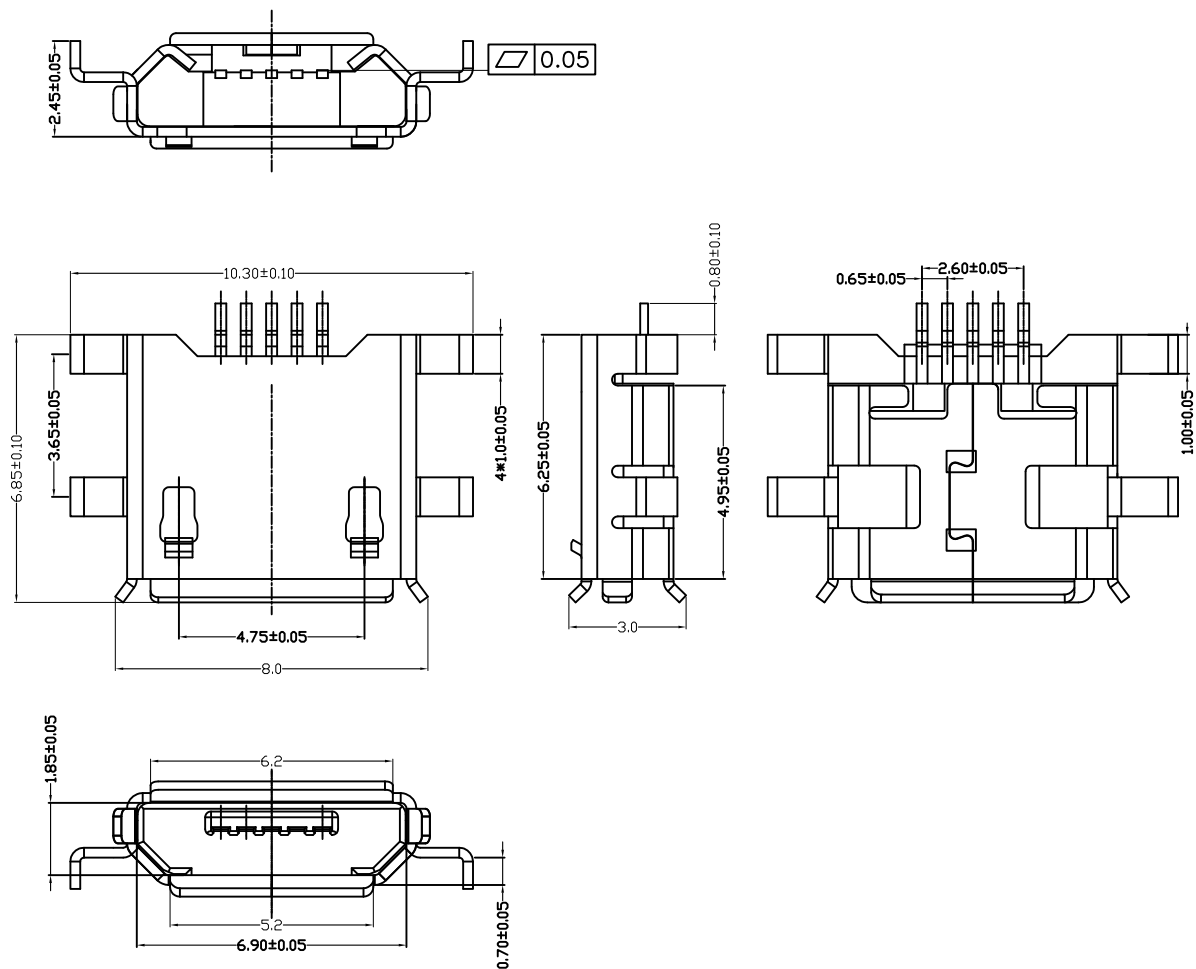

RECOMMENDED PCB LAYOUT

Note:

1. Material:

- 1.1 Housing: High temperature thermoplastic with g.f, UL94v-0
- 1.2 Contact: copper alloy, t=0.20mm
- 1.3 Shell: copper alloy, t=0.25mm

2. Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 50 mW Max.
- 2.4 Insulation resistance: 100 MW Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 3000 insertion/extraction cycles
- 2.7 Temperature range: -30° C~80° C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ± 0.03

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWFMM07-5B-LF

SERIES
FEMALE
5 PIN B TYPE
LEADFREE
0.70mm
METAL FOOT
OFF/SET
90°SMT

DESCRIPTION: MICRO 5P/F B TYPE 四脚沉板0.7帶1.0插板