
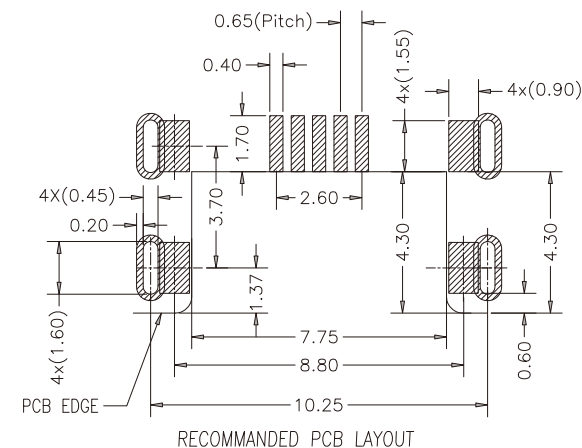
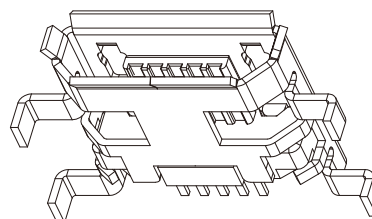
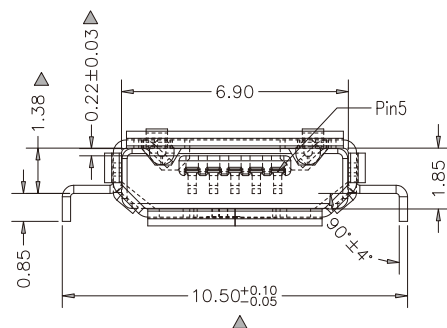
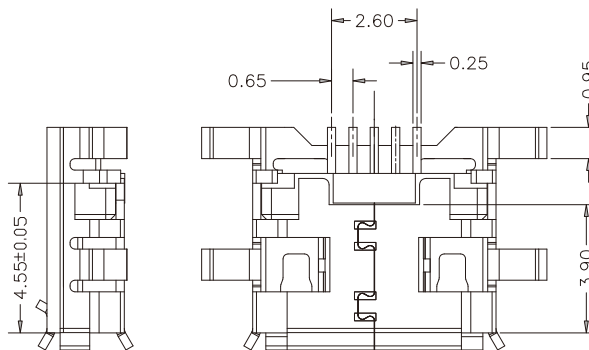
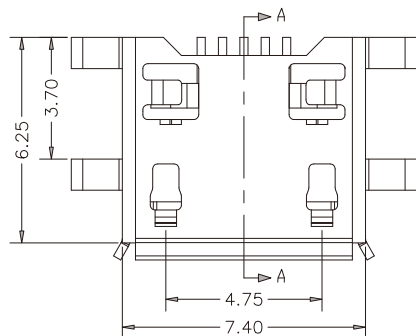



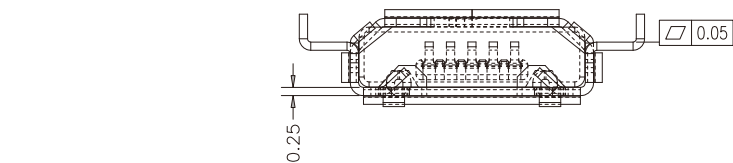

Notes:

1.Materials:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94 v-0.
- 1.2 Contact: copper alloy,t=0.20mm.
- 1.3 Shell: copper alloy,t=0.25mm.

2.Specifications:

- 2.1. Current rating: 1 A Max.
- 2.2. Dielectric withstanding:voltage: 100 V(ac) for 1 min.
- 2.3. Contact resistance: 50 mW Max.
- 2.4. Insulation resistance: 100 MW Min.
- 2.5. Total mating force: 3.57 Kgf Max.
- 2.6. Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 3000 insertion/extraction cycles
- 2.7. Temperature range: -30°C~+80°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

MISB-SWFMM08-5B-LF

SERIES
FEMALE
LEADFREE
5 PIN B TYPE
0.85mm
METAL FOOT
OFF/SET
90°SMT

DESCRIPTION: MICRO USB 5PF 沉板DIP 無接地片