


MATERIALS
 HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION
 CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+105°C

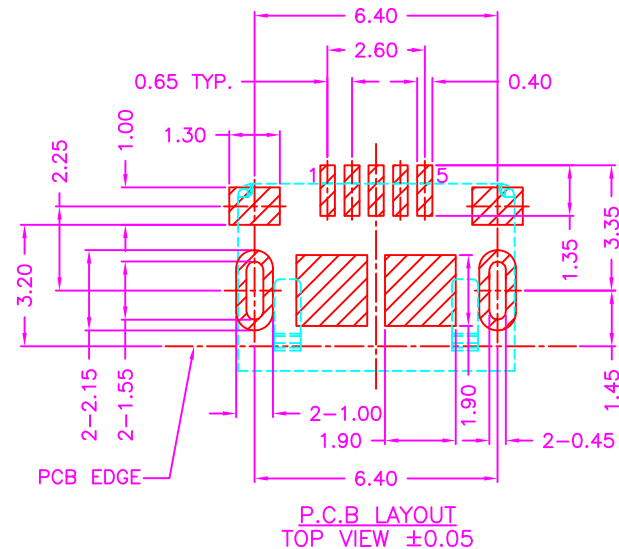

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY	CY	X. ± 0.40
CHECKED BY	GENIUS	.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XX ± 0.20
DATE		.XXX ± 0.10
SIZE A4	PJECTION	ANG ±

照片框

ORDER INFORMATION

MISB-SWFXME6464-5B-LF
 SERIES | | | | |
 LEADFREE
 5 PIN B TYPE
 METAL FOOT 6.40mm+EAR 6.40mm
 NON FLANGE
 90°SMT
 FEMALE

煜倫股份有限公司

www.morethanall.com

SIZE A4 PJECTION

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE