


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+105°C

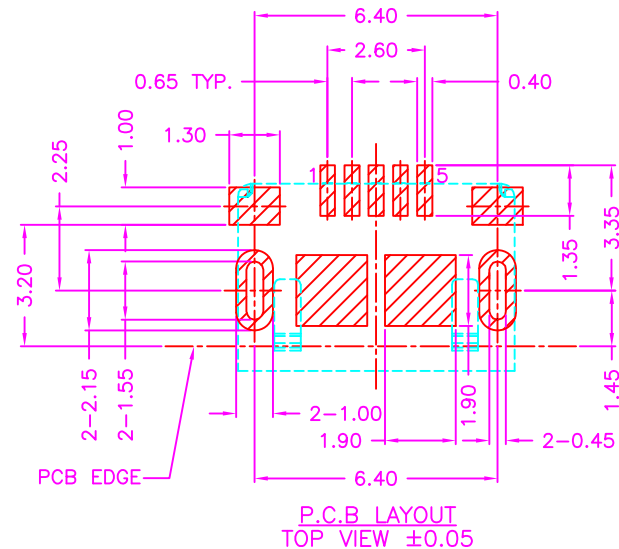

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWFXME6464R-5B-LF

SERIES

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

FEMALE

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||

||


||

||

||

||

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE

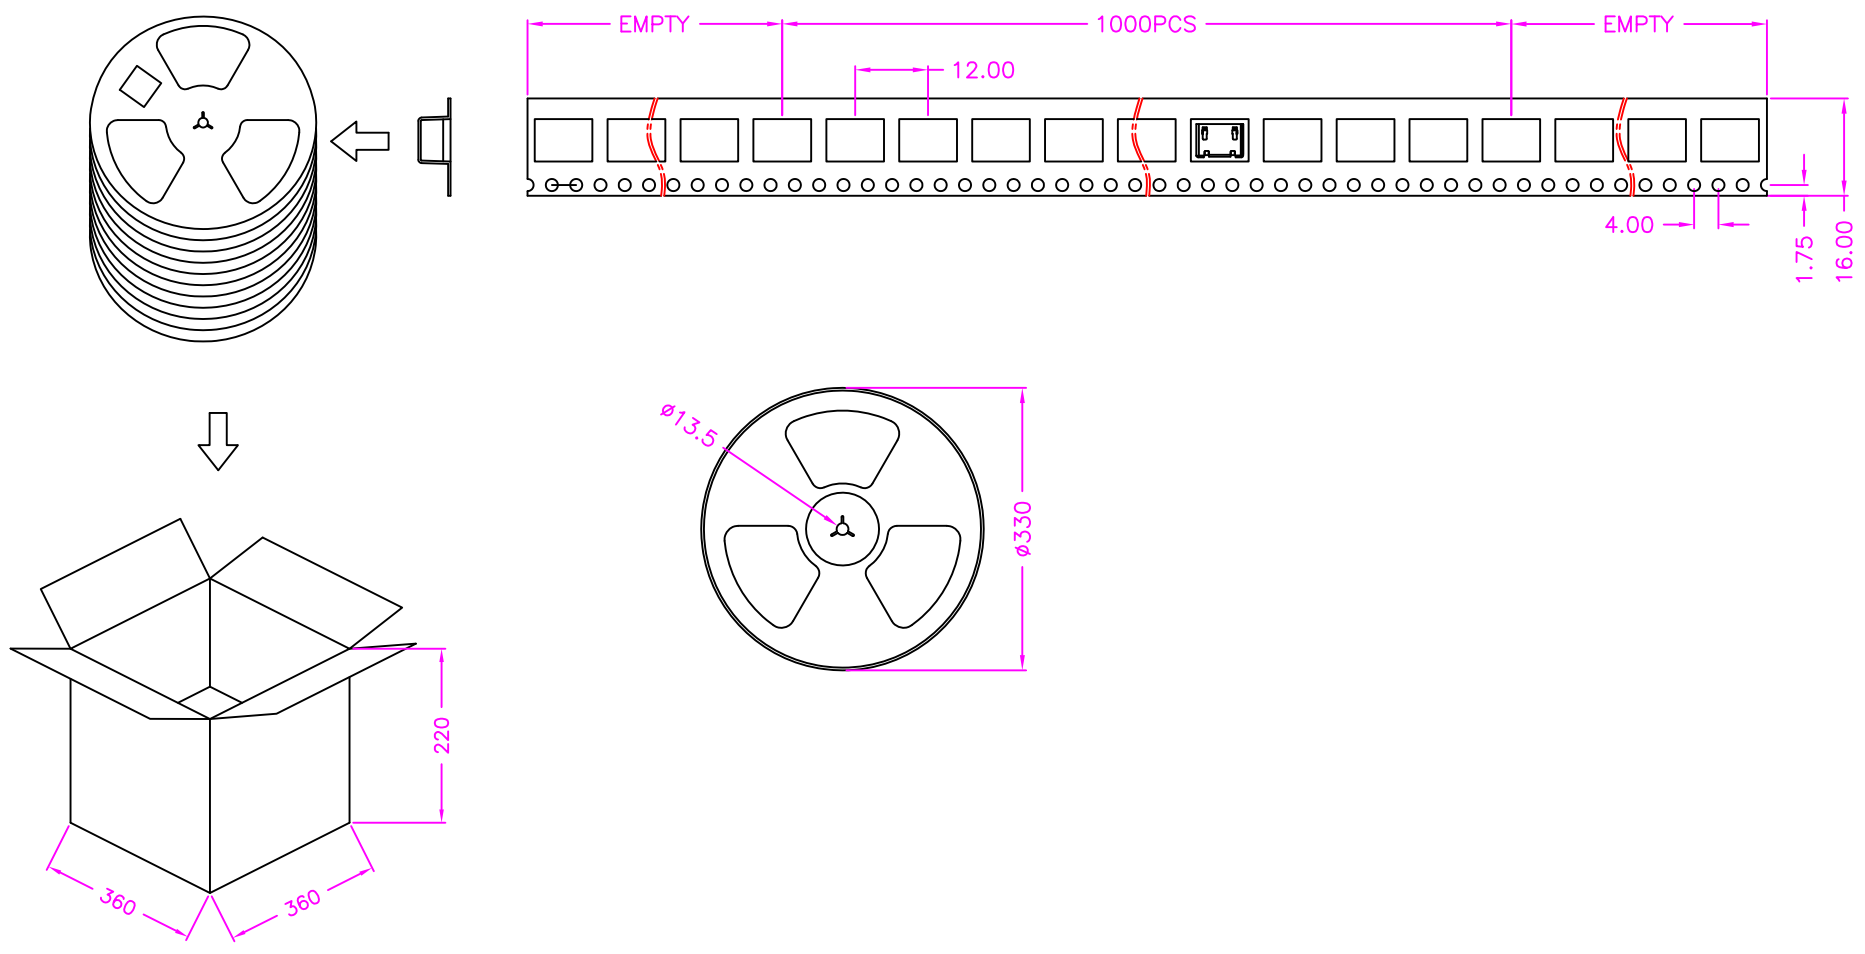

NOTE: 1000PCS/ REEL, 10000PCS/ 10 REELS/ CARTON

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION



ORDER INFORMATION

MISB-SWFXME6464R-5B-LF
 SERIES | | | | |
 FEMALE | NON FLANGE | METAL FOOT 6.40mm+EAR 6.40mm | LEADFREE 5 PIN B TYPE
 90°SMT REEL

DESCRIPTION: MICRO USB B TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE