
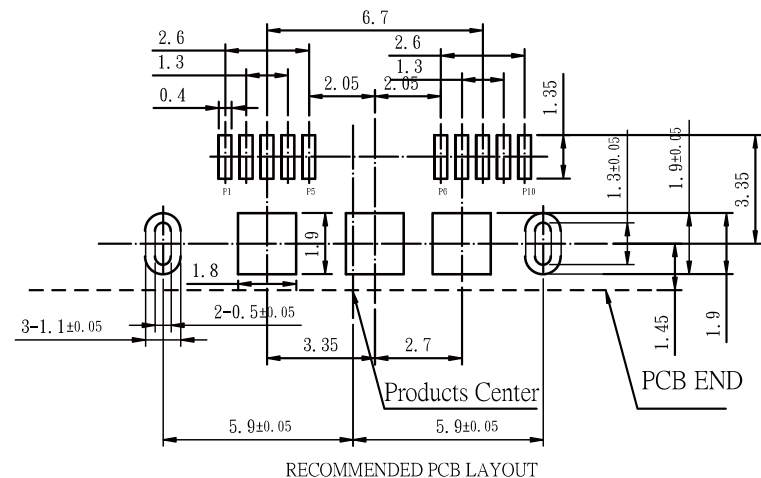


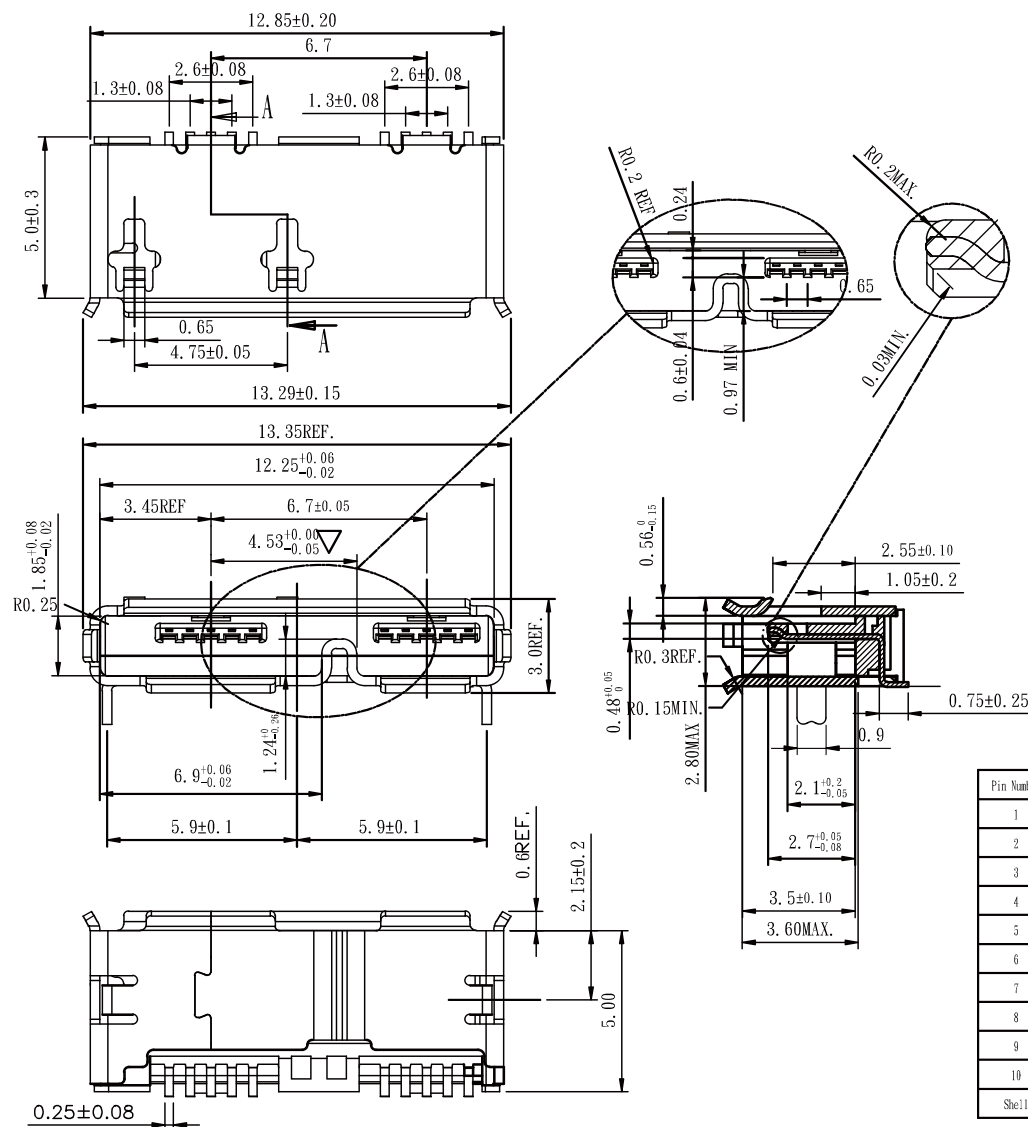

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: STAINLESS STEEL NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA,
 SN PLATED ON SOLDER TAIL, 80 U" MIN. NICKEL
 UNDER PLATED OVERALL.

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	WicB_SSTX-
7	WicB_SSTX+
8	GND_DRAIN
9	WicB_SSRX-
10	WicB_SSRX+
Shell	Shield

RoHS Compliant

TOLERANCES ARE

X, $\pm$
 .X $\pm$ 0.25
 .XX $\pm$ 0.15
 .XXX $\pm$ 0.05
 ANG $\pm$

照片框

ORDER INFORMATION

MISB-SWM-10AB-LF
 SERIES | LEADFREE
 10 PIN AB TYPE
 METAL FOOT
 90°SMT
 FEMALE

DESCRIPTION: MICRO USB 3.0 AB/F SMT

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION