


ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	SHELL	1	STAINLESS	20u" NICKEL,100u" TIN
2	CONTACT	5	COPPER ALLOY	Gold flash Plating Over All 15u" Gold flash on Contact AREA
3	HOUSING	1	SYNTHETIC RESIN	(Black)

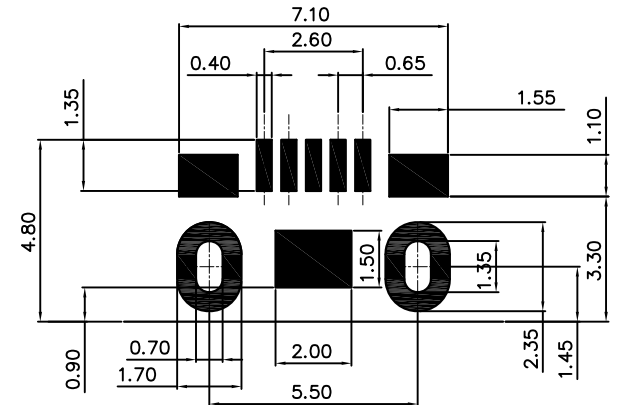

RECOMMENDED P.C.B. LAYOUT
TOLERANCE ±0.03mm)

SPECIFICATION
MATERIAL
 See drawing
ENVIRONMENTAL:
 Storage temperature : -40°C~+80°C
 Operating temperature : -40°C~+85°C
STANDARD DATA
 Rating current:0.5A
ELECTRICAL
 Insulator resistance: 1000M ohms Min. @ 500 VDC
 Withstanding voltage: 100 VAC / minute
 Contact resistance: 30 m ohms
MECHANICAL
 Mating force: 35N(3.57kgf) Max.
 Unmating force (Without lock): 8N(0.81kgf) Min.
 Durability: 10000 cycles Min.
 Contact retention force: 2.1N(0.21kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±


ANG ± 5°

P PROJECTION

照片框

ORDER INFORMATION

MISB-SWME5555-5B-LF

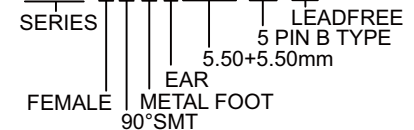

DESCRIPTION: I/O CONNECTOR(MICRO USB) <<NORMAL B-TYPE>>