
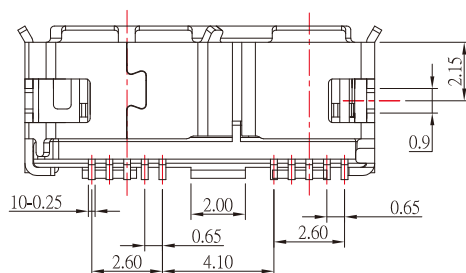


Technical drawing of a mechanical part with dimensions and labels. The drawing shows a side view of a component with various features and dimensions. Key dimensions include overall length 12.27, overall width 12.55, and various internal and external measurements. Labels include PIN 1, PIN 5, PIN 6, PIN 10, R0.2, and C. The drawing is a technical drawing of a mechanical part, likely a connector or a bracket, with various dimensions and labels. The dimensions are given in millimeters (mm). The labels include PIN 1, PIN 5, PIN 6, PIN 10, R0.2, and C. The drawing is a technical drawing of a mechanical part, likely a connector or a bracket, with various dimensions and labels. The dimensions are given in millimeters (mm). The labels include PIN 1, PIN 5, PIN 6, PIN 10, R0.2, and C.



NOTE:

1.MATERIAL:

1.1 INSULATOR: LCP, UL 94V-0,Black

1.2 CONTACT: BRASS

1.3 SHELL: SUS304

2.Finish:

2.1 CONTACT: PLATED GOLD IN MATING AREA ;

TIN PLATED ON SOLDER BALLS :

NICKEL UNDER PLATED OVERALL

2.2 SHELL: NICKEL UNDER PLATED SURFACE LAYER

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE

SIZE A4

PJECTION 

Up to 5	± 0.2
Above 5 ~ 15	± 0.3
Above 15 ~ 30	± 0.4
Above 30 ~ 50	± 0.5
Angle	$\pm 0.3^\circ$



ORDER INFORMATION

MISB-SWMM-10B-LF

SERIES

LEADFREE

10 PIN B TYPE

METAL FOOT / 2

90°SMT

FEMALE

DESCRIPTION: MICRO 3.0 B/F DIPX3, 腳長:0.9mm

MORE THAN ALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com