

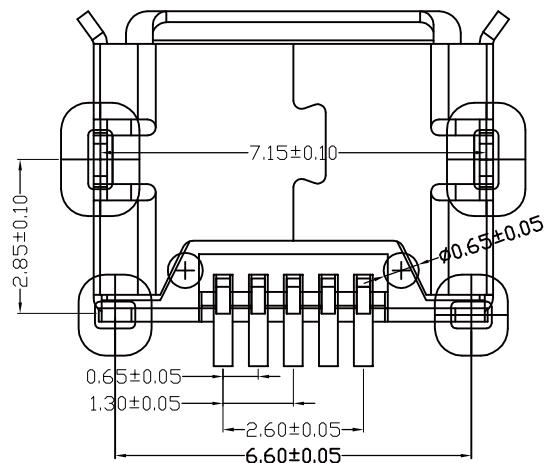
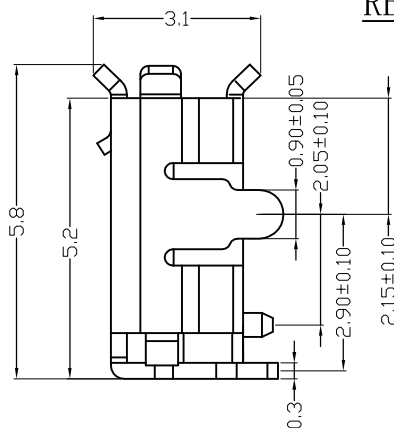
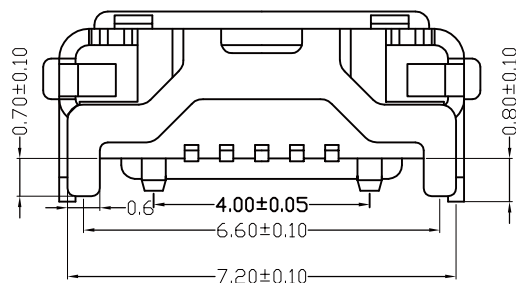
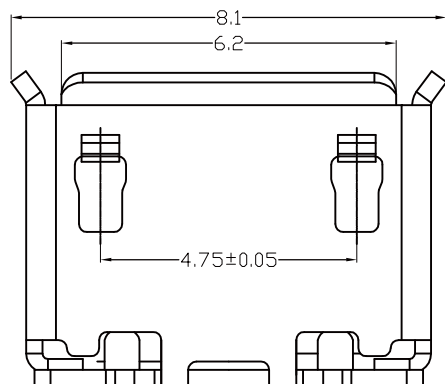


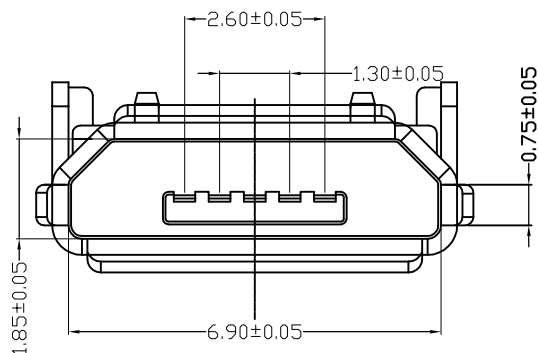

RECOMMENDED PCB LAYOUT

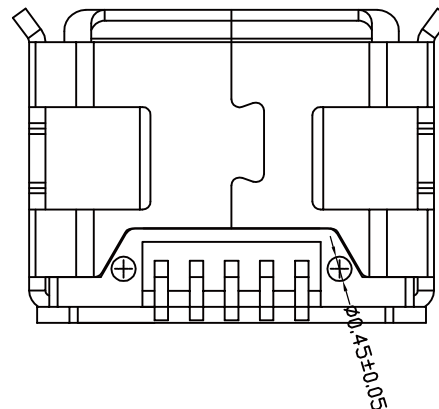

备注:

1. 产品规格:

1-1. 插入力: 75N MAX.

1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 10000 CYCLES

1-3. 额定电流: 1.0A

1-4. 额定电压: 30V

1-5. 耐久性: 10000 CYCLES MIN.

1-6. 耐电压: 100V AC MIN.

1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 10000 CYCLES

1-8. 绝缘电阻: 100MΩ MIN

1-9. 工作温度: -30° TO +80°

2. 材质:

2.1 胶芯: LCP UL94V-0

2.2 端子: C2680R-H, 镍底, 镀金1μ"

2.3 外壳: SUS301(硬度<330HV)镀雾锡

3. 所用材质须符合RoHS要求

4. 重点尺寸标识"▲"符号

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.20

.XX ± 0.10

.XXX ± 0.03

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWMMP-5B-LF

SERIES
LEADFREE
5 PIN B TYPE
POST
METAL FOOT
90°SMT
FEMALE

DESCRIPTION: MICRO 5P/F B 牛角外0.8(7.15*6.6)加长0.3有柱