
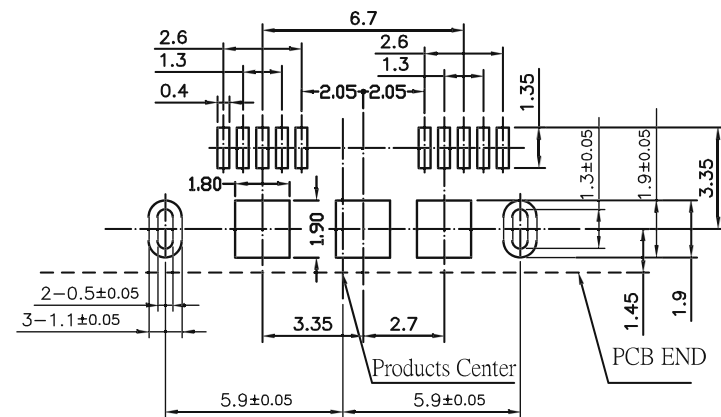
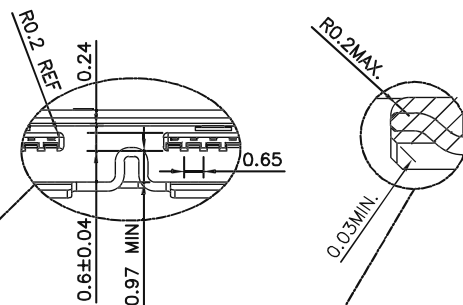


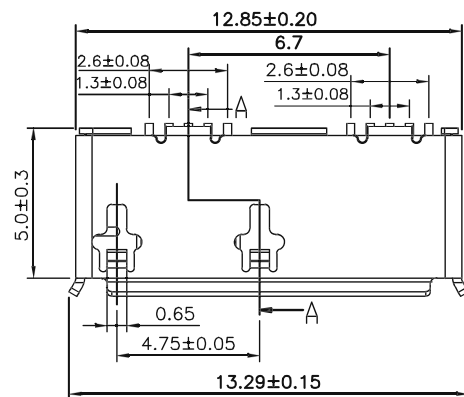



RECOMMENDED PCB LAYOUT

MATERIALS


HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: STAINLESS STEEL, GOLD PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

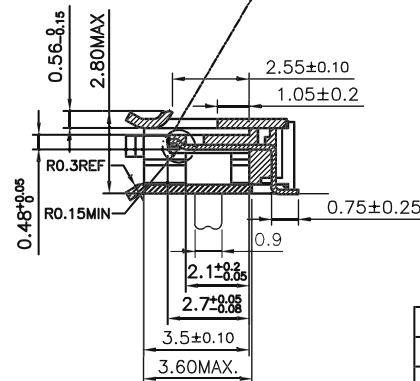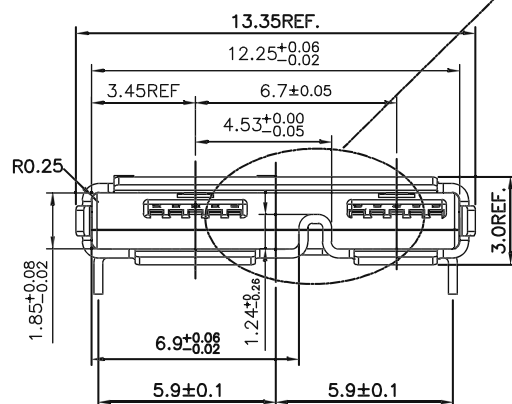

Pin Number	Signal Name
1	VBUS
2	D-
3	D+
4	ID
5	GND
6	MicB_SSTX-
7	MicB_SSTX+
8	GND_DRAIN
9	MicB_SSRX-
10	MicB_SSRX+
Shell	Shield

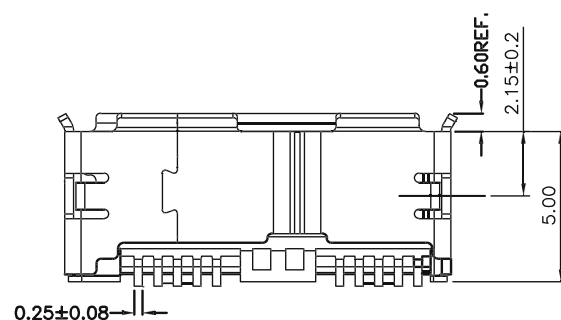

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISB-SWMR-10AB-LF
SERIES REEL 10 PIN AB TYPE
LEADFREE
METAL FOOT
90°SMT
FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DESCRIPTION: MICRO CONNECTOR AB TYPE, PCB MOUNT, METAL SHIELD, FEMAL, SMT (DIP SHELL)

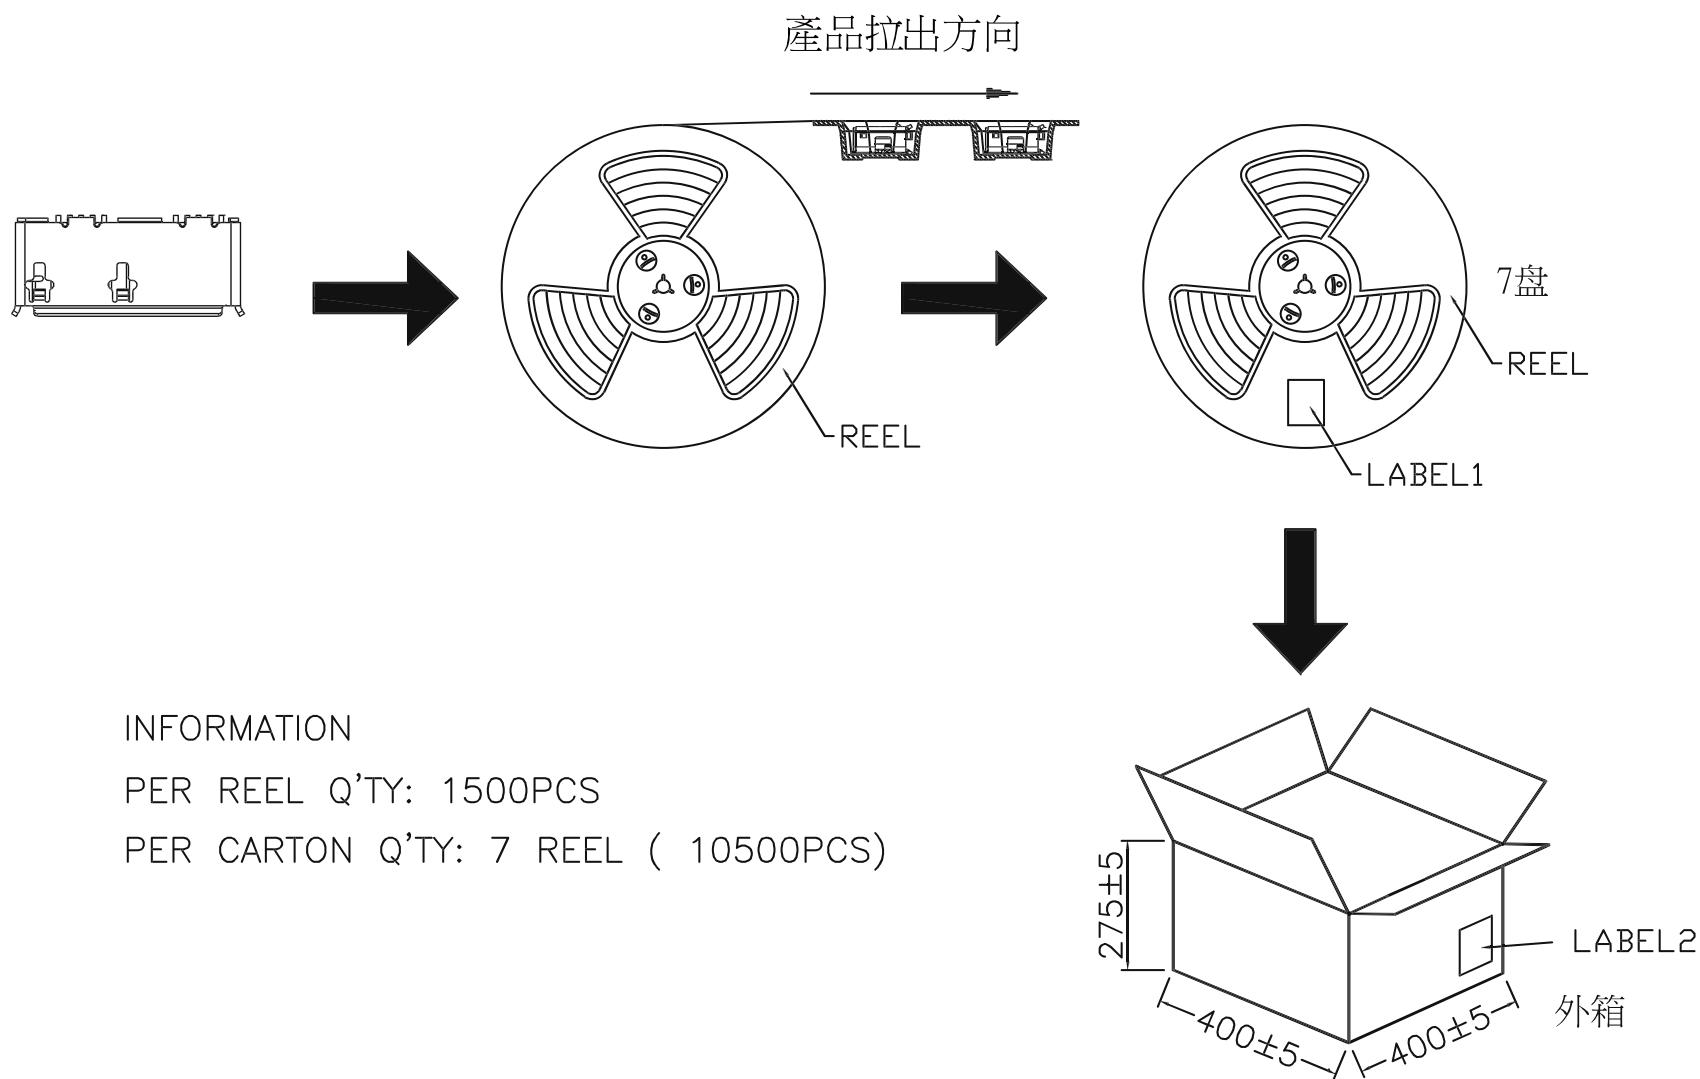

INFORMATION

PER REEL Q'TY: 1500PCS

PER CARTON Q'TY: 7 REEL (10500PCS)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

照片框

ORDER INFORMATION

MISB-SWMR-10AB-LF
SERIES REEL 10 PIN AB TYPE
LEADFREE
METAL FOOT
90°SMT
FEMALE

DESCRIPTION: