


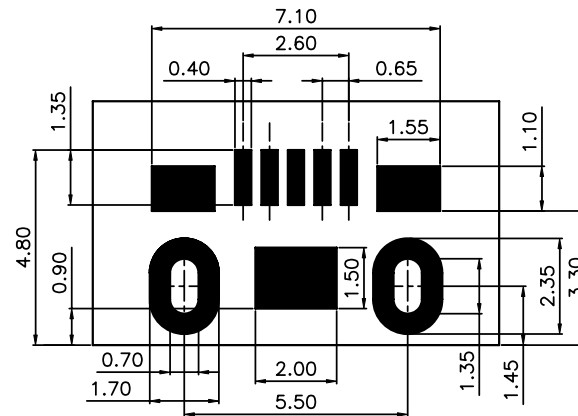
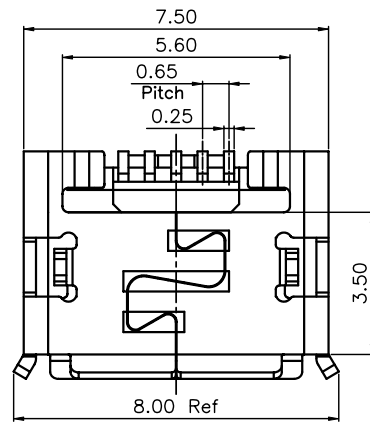



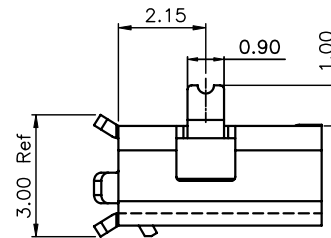


RECOMMENDED P.C.B. LAYOUT
TOLERANCE $\pm 0.03\text{mm}$

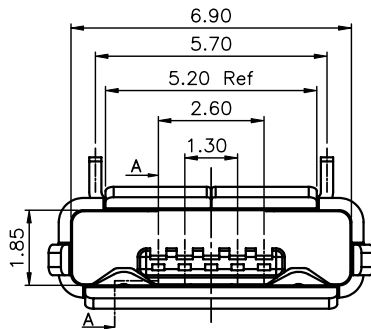

SECTION A-A

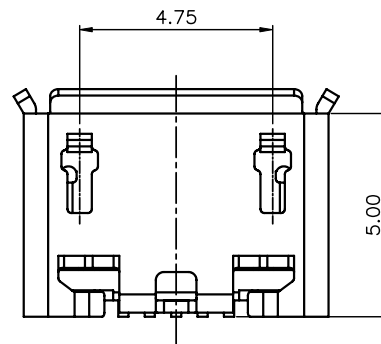

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	SYNTHETIC RESIN	(Black)
2	CONTACT	5	COPPER ALLOY	Gold flash Plating Over All
3	SHELL	1	STAINLESS	5u" Gold flash on Contact AREA 20u" NICKEL, 100u" TIN

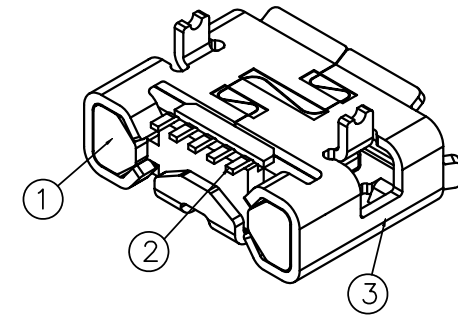

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: 1.0A

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 500 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 50 m ohms Max.

MECHANICAL

Mating force: 35N(3.57kgf) Max.

Unmating force : 8N(0.81kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 2.1N(0.21kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX $\pm$

ANG $\pm 5^\circ$

DATE

SIZE A4

PPOJECTION



照片框

ORDER INFORMATION



MISB-SWMR-5AB-LF

SERIES LEADFREE
5 PIN AB TYPE
REEL
METAL FOOT
90°SMT
FEMALE


DESCRIPTION: I/O CONNECTOR(MICRO USB) NORMAL AB TYPE

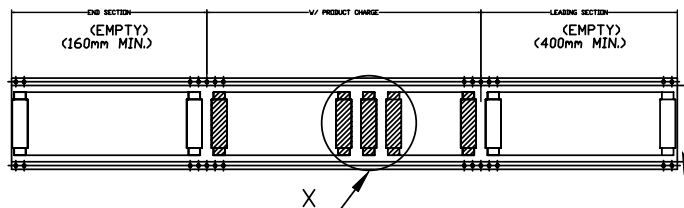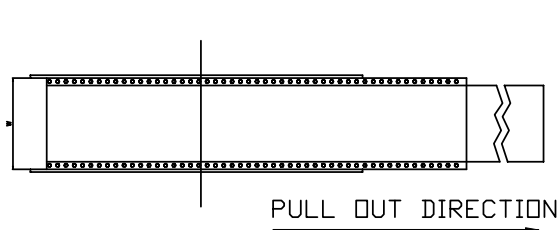


ITEM 項目	PARTS NAME 零件名稱	FINISH/REMARK 處理/備註
1	I/O CONNECTOR	20000 PCS/BOX
2	BOX	10PCS REEL/BOX
3	WATERPROOF BAG	1 PCS
4	REEL	2000PCS/REEL
5	COVER TAPE	Wide=16mm
6	CARRIER TAPE	14.5/REEL
7	LABEL	批號標籤

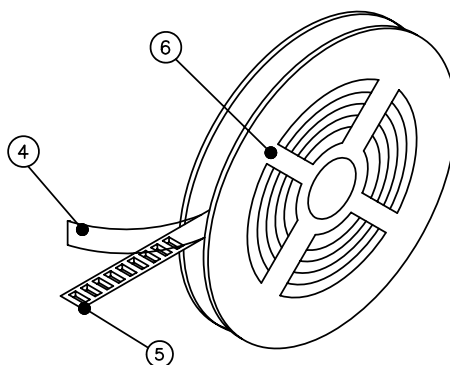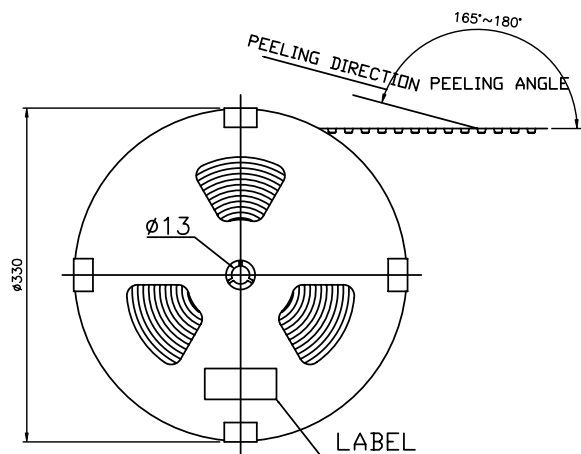

TOP COVER TAPE

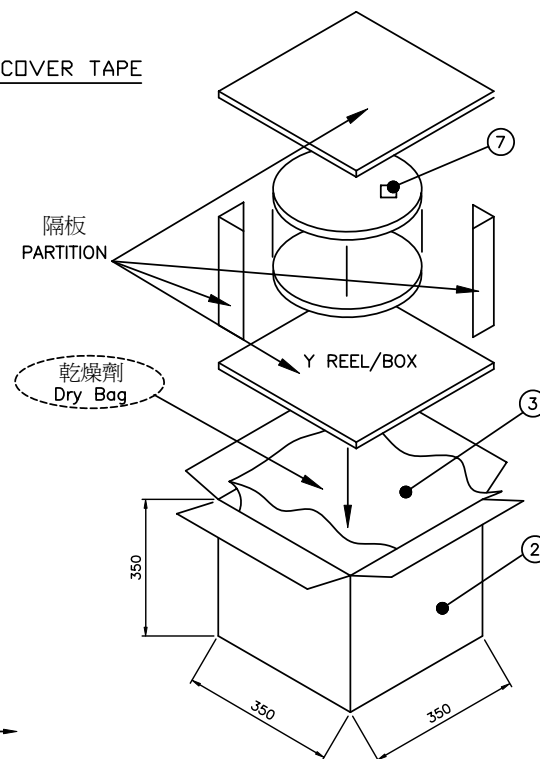

收料方向
CARRIER MATERIAL
DIRECTION

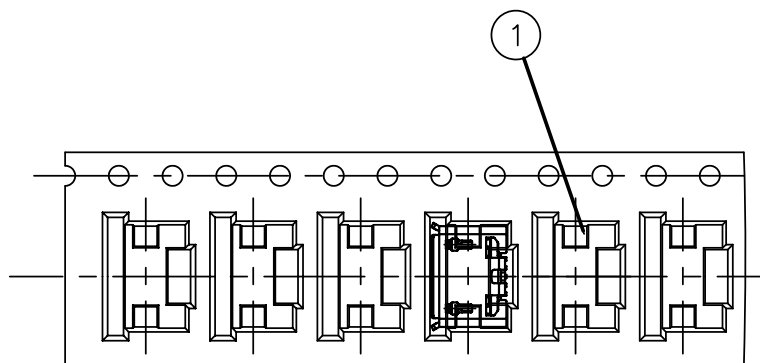

客戶放料方向
INPUT MATERIAL
DIRECTION

NOTES
1.MATERIAL: PS (透明白)
2.DEFORMATION(變形)&DAMAGE(損壞): NA.(不可)
3.All dimensions meet EIA-481-C requirements.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.20

.XX ± 0.10

.XXX ±

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWMR-5AB-LF

SERIES

REEL

METAL FOOT

90°SMT

FEMALE

LEADFREE

5 PIN AB TYPE

DESCRIPTION: I/O CONNECTOR (SMT TYPE)