

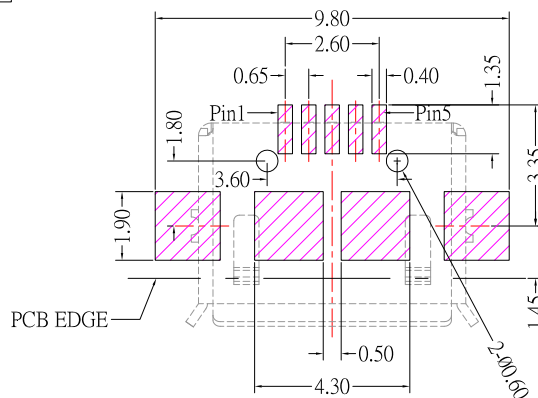
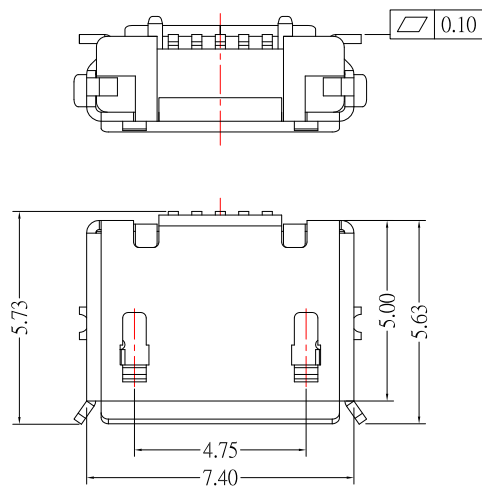

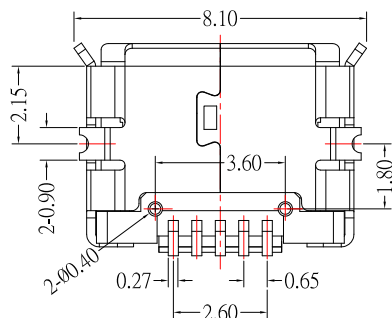


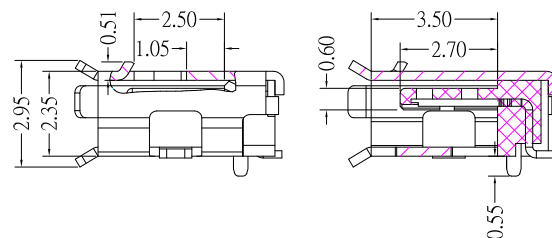

RECOMMENDED PCB LAYOUT

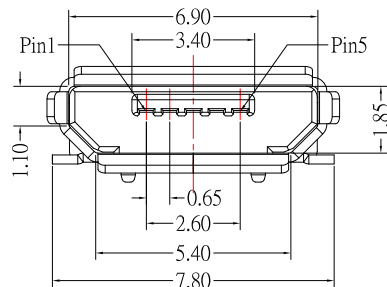

Notes:

1.Materials:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94 v-0.
- 1.2 Contact: Phosphor Bronze.
- 1.3 Shell: Brass.

2.Finish:

- 2.1 Contact: Plated Gold in Mating Area ;
Gold Plated on Solder Balls ;
Nickel under plated overall
- 2.2 Shell: Tin under Plated surface layer

3.Specifications:

- 3.1. Current rating: 1.0 A Max.
- 3.2. Dielectric withstanding:voltage: 100 V(ac) for 1 min.
- 3.3. Contact resistance: 50 mΩ Max.
- 3.4. Insulation resistance: 100 MΩ Min.
- 3.5. Total mating force: 3.57 Kgf Max.
- 3.6. Total unmating force: 1.02 Kgf Min.0.81~2.05 Kgf Min.after
10,000 insertion/extraction cycles.
- 3.7. Temperature range: -30°C~+80°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISB-SWP36-5B-LF
SERIES | | LEADFREE
5 PIN B TYPE
POST 3.6mm
90°SMT
FEMALE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 30 ±0.3
Above 30 ~ 50 ±0.4
Above 50 ±0.5
Angle ±0.3°

DESCRIPTION: MICRO USB 5PF/B TYPE 定位柱3.6