

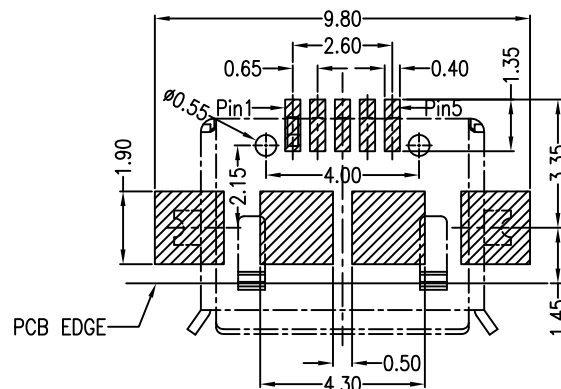
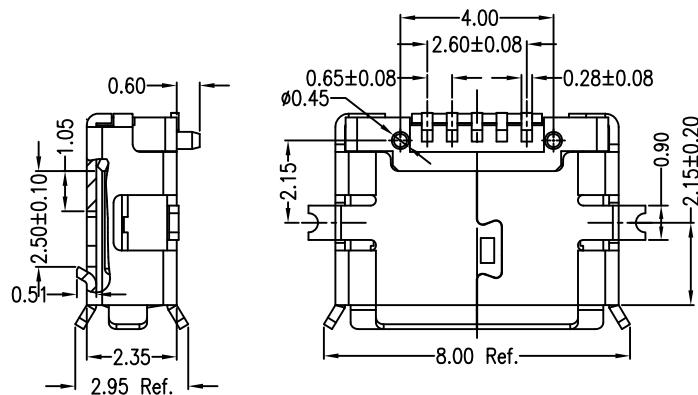
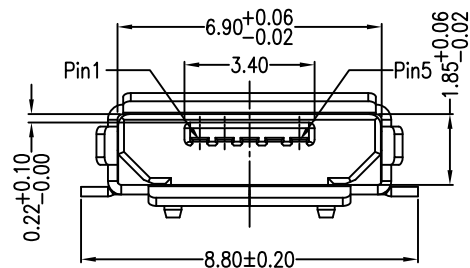
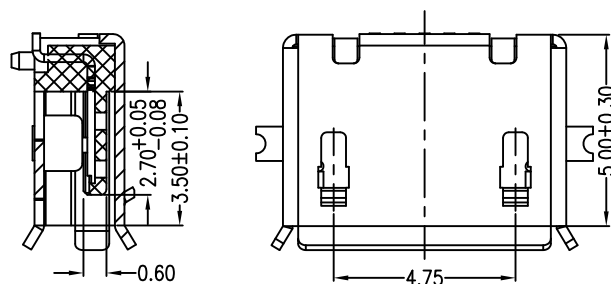
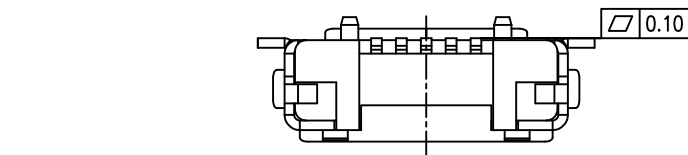




RECOMMENDED PCB LAYOUT

PCB图仅供参考



Note:

1.Material:

- 1.1 Housing: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: copper alloy,t=0.20mm
- 1.3 Shell: copper alloy,t=0.25mm

2.Specification:

- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min
- 2.7 Temperature range: -30°C~80°C

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±


照片框

ORDER INFORMATION


MISB-SWP40R-5AB-LF

SERIES | LEADFREE  
5 PIN AB TYPE  
REEL  
POST 4.0mm  
90°SMT  
FEMALE


DESCRIPTION: MICRO USB 5S AB TYPE SMT 有腳柱

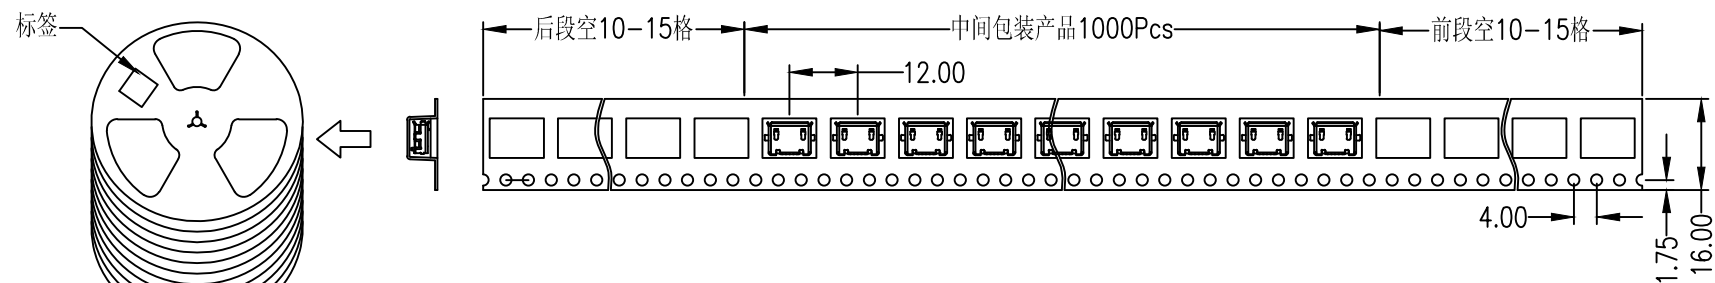

10盘 ↓

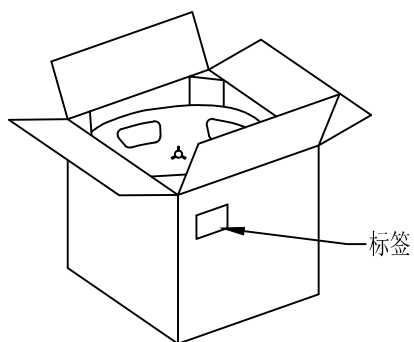


标签




透明胶封箱

10K/箱 纸箱规格:360\*360\*220mm

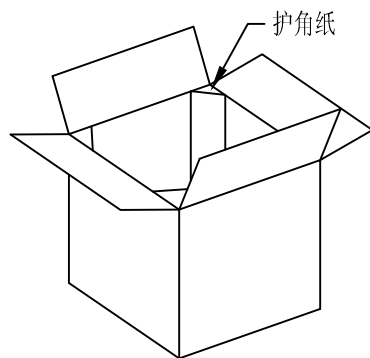

护角纸

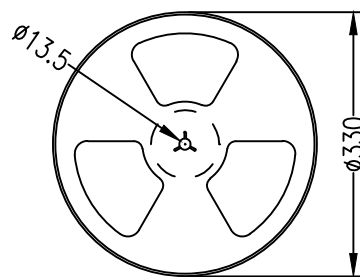

1K/盘

1. 每盘前后各空10-15个空格, 中间包装1000PCS.
2. 每箱包装10盘, 共包装10,000PCS.

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWP40R-5AB-LF

SERIES  
LEADFREE  
5 PIN AB TYPE  
REEL  
POST 4.0mm  
90°SMT  
FEMALE

DESCRIPTION: