


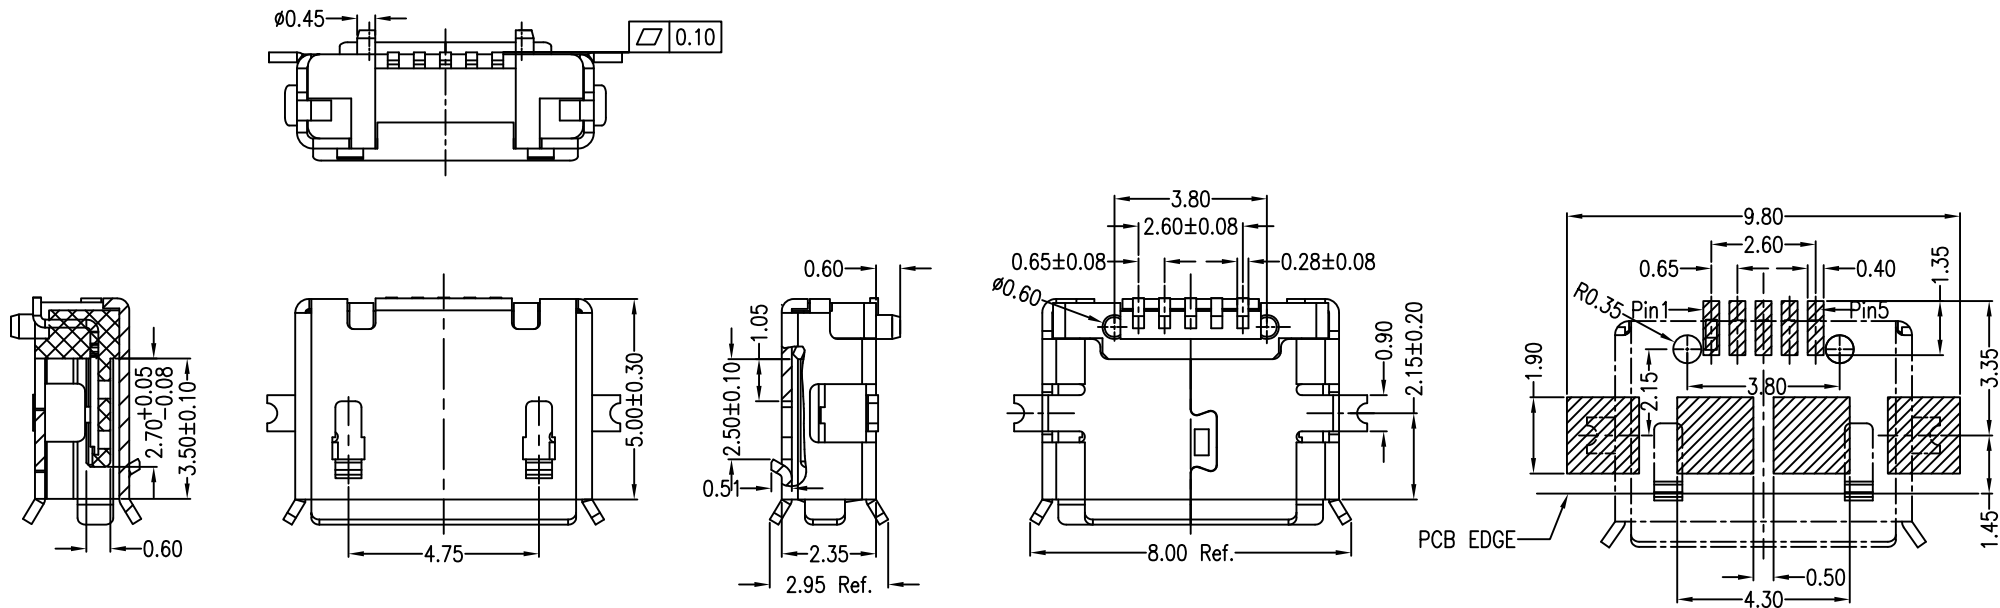

RECOMMENDED PCB LAYOUT

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
SHELL: COPPER ALLOY, TIN PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
Au PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

NO.	APPLICATION	TYPICAL WIRING ASSIGNMENT
P1	VBUS	RED
P2	D-	WHITE
P3	D+	GREEN
P4	ID	RA_PLUG-ID
P5	GND	BLACK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°



照片框

ORDER INFORMATION

MISB-SWPR-5AB-LF

SERIES REEL POST 90°SMT FEMALE
LEADFREE 5 PIN AB TYPE

DESCRIPTION: MICRO USB AB TYPE, PCB MOUNT, SMT,METAL SHIELD, FEMALE WITH POST

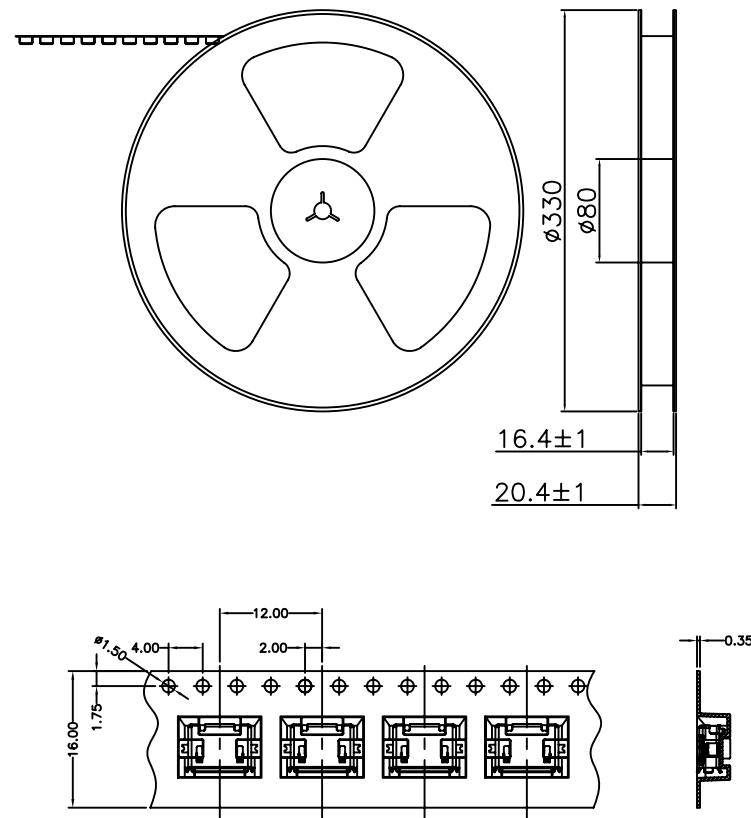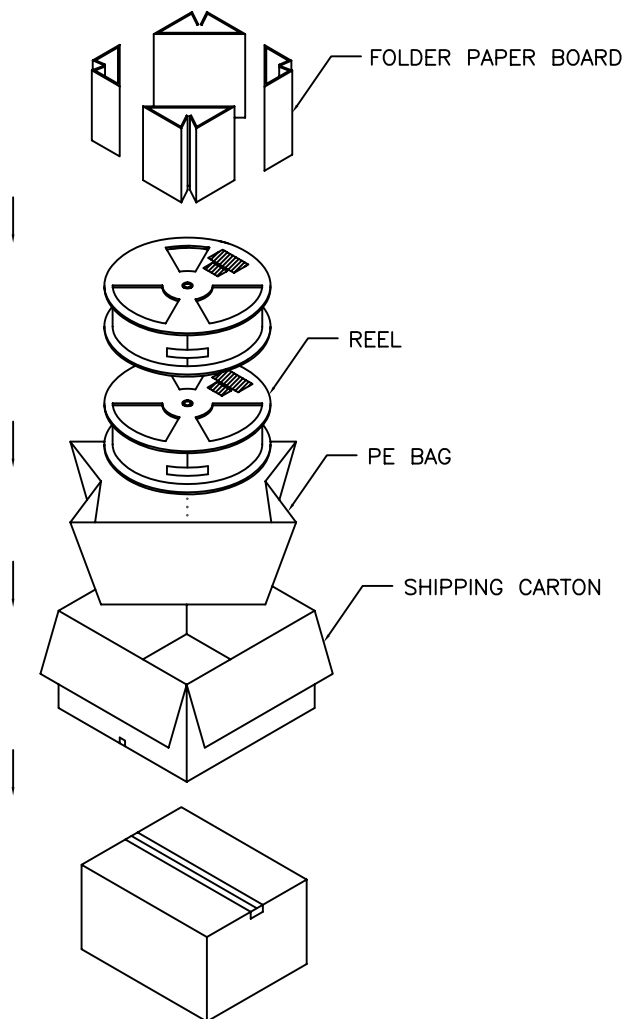

INFORMATION

PER REEL Q'TY: 1000PCS

PER CARTON Q'TY: 10 REEL (10000PCS)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

MISB-SWPR-5AB-LF

SERIES REEL POST 90°SMT FEMALE
LEADFREE
5 PIN AB TYPE

DESCRIPTION: MICRO USB AB TYPE, PCB MOUNT, SMT,METAL
SHIELD, FEMALE WITH POST PACKING