


ITEM	PARTS NAME	Q'TY	MATERIAL	FINISH/REMARK
1	SHELL	1	STAINLESS	20u" NICKEL,100u" TIN
2	CONTACT	5	COPPER ALLOY	Gold flash Plating Over All 15u" Gold flash on Contact AREA
3	HOUSING	1	SYNTHETIC RESIN	(Black)

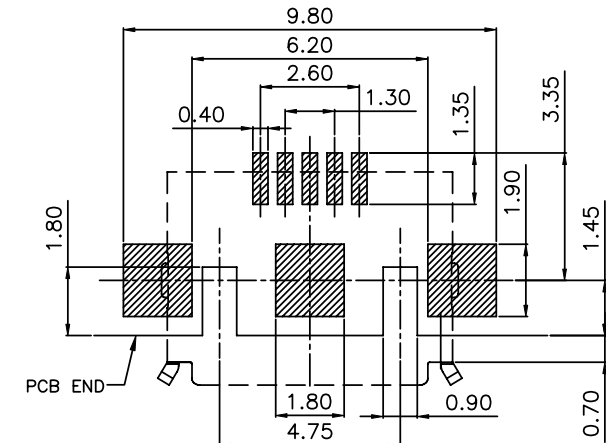

RECOMMENDED P.C. BOARD LAYOUT
(TOLERANCE: ±0.05mm)

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current:(1&5PIN)2.0A; (2&3&4PIN)0.5A Δ

Operating temperature: -30°C ~ +70°C

Storage temperature: -10°C ~ +60°C

ELECTRICAL

Insulator resistance: 100m ohms Min. @ 500 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 60 m ohms

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 8N(0.81kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 2.1N(0.21kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.08
ANG ± 5°



ORDER INFORMATION

MISB-SWRVE-5B-LF
SERIES | | | | LEADFREE
FEMALE | | | | 5 PIN B TYPE
EAR REVERSED
90°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: