

**SPECIFICATIONS**

- Electrical:**
- 1.Current Rating: 0.5A / contact terminal
  - 2.Contact Resistance: 60 milliohms Max
  - 3.Dielectric Withstanding Voltage: 100 V AC AT Sec Level
  - 4.Insulation Resistance: 100 MEGA ohms Min @ 500 VDC
- Mechanical:**
- 1.Connector Mate and Unmate Force  
Mate force: 3.06 kgf Max  
Unmate force: 0.81 kgf Min
  - 2.Durability: 10,000 cycles Min
  - 3.Contact retention force: 0.21 kgf Min


- Material:**
- 1.Housing: High Temperature Thermal Plastics, UL 94V-0 , PBT , Black
  - 2.Contact: Phosphor Bronze
  - 3.Shell: Stainless Steel
- Finish:**
- 1.Contact: Plated Gold in Mating Area  
Tin on Solder Balls
  - 2.Shell: Sn plating over Nickel plating

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

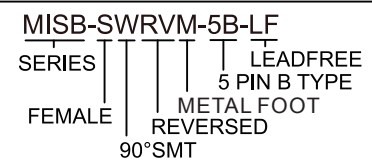

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES  
煜倫股份有限公司  
www.morethanall.com

DRAWING BY CY		X, ± .X ± 0.35 .XX ± 0.25 .XXX ± 0.15 ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

DESCRIPTION: MICRO USB B TYPE REVERSE SHELLED DIP