

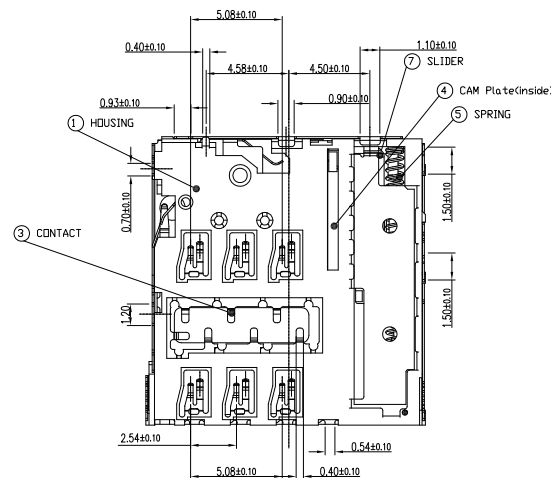

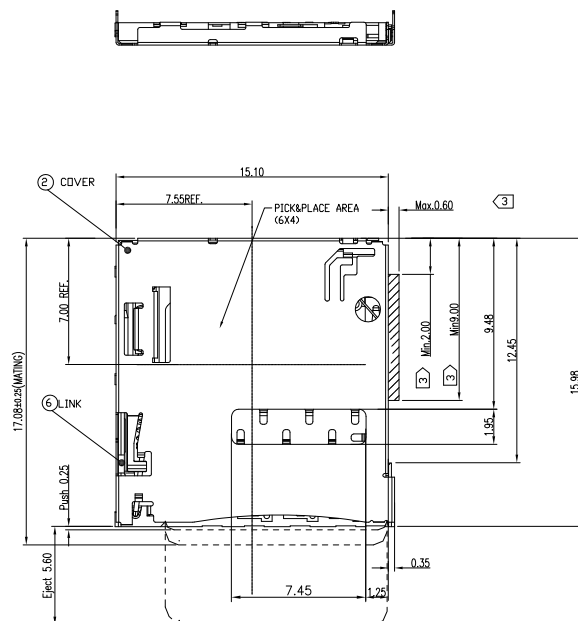


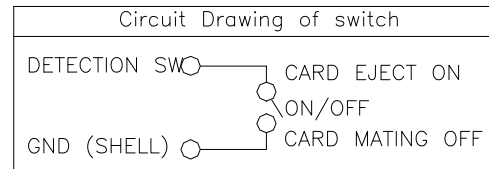

(NOTE)

1. LEAD Co-planarity :Max 0.10mm
2. No rust, contamination, damage nor deformation effecting on function
3. Switch moving area
4. Non-cumulative tolerance
5. Circuit Drawing of switch




7	SLIDER	1	LCP UL94V-0
6	LINK	1	STAINLESS STEEL
5	SPRING	1	SWP-B
4	CAM Plate(inside)	1	STAINLESS STEEL
3	CONTACT	1	COPPER ALLOY Nickel Barrier Contact: Au 12u" Min over Ni 40~200u" Lead : Au flash 1u" Min over Ni 40~200u"
2	COVER	1	STAINLESS STEEL Not hold down : Nickel 10~200u" Hold down : Au flash 1u" Min over Ni 10~200u"
1	HOUSING	1	LCP UL94V-0
NO.	DESCRIPTION	Q'TY	Material

【 Connector Pin Assignments 】

No.	Pin name	Description
①	C1	Vcc of SIM
②	C2	RST of SIM
③	C3	CLK of SIM
④	C5	GND of SIM
⑤	C6	Vpp of SIM
⑥	C7	I/O of SIM
⑦	SW	Detection Switch
⑧~⑬	GND	Shell Ground

【 SIM CARD PAD LAYOUT 】



【 SIM Card Pin Assignments 】

PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISCP-W0112MAR-06-LF

SERIES

LEADFREE

06WAY

REEL


SWITCH CLOSED

METAL FOOT



HIGH 1.27mm

90°SMT
PAD TO PAD 1.10mm

DESCRIPTION: MICRO SIM H:1.27mm

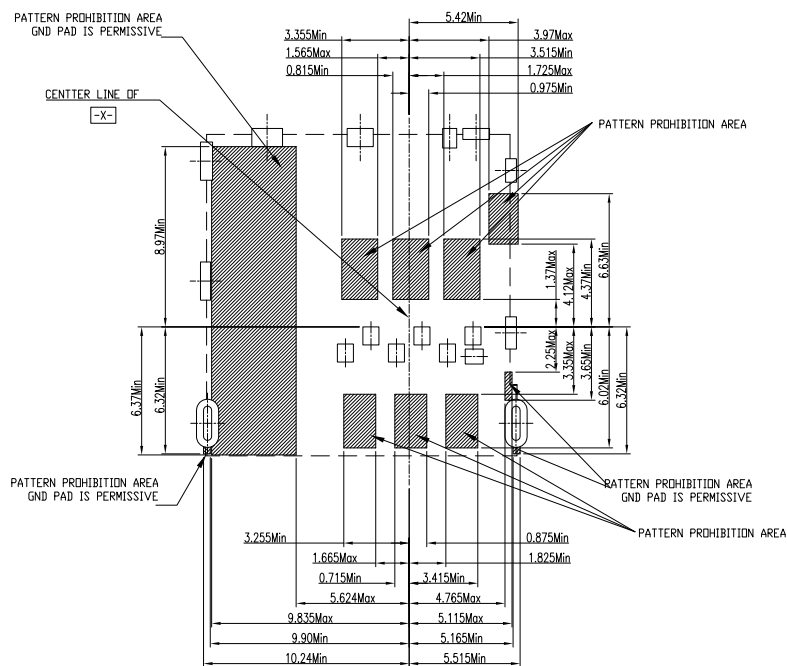

Recommended PCB Layout
(General tolerance: ± 0.05)

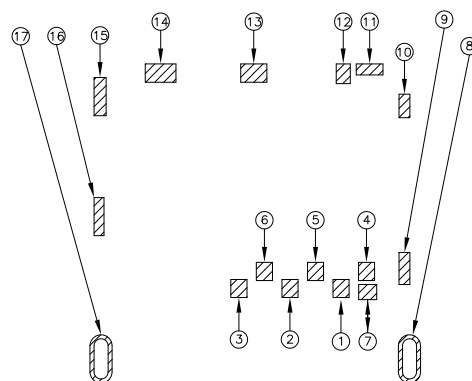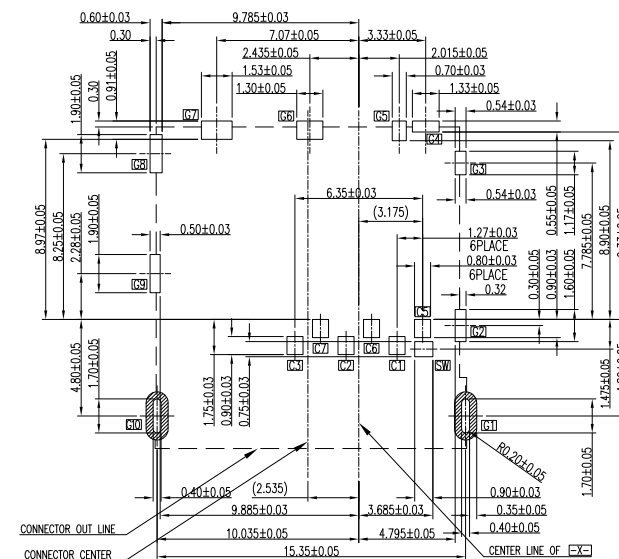

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

MISCP-W0112MAR-06-LF

SERIES

LEADFREE

06WAY

REEL


SWITCH CLOSED

METAL FOOT

HIGH 1.27mm

90°SMT
PAD TO PAD 1.10mm


DESCRIPTION: MICRO SIM H:1.27mm

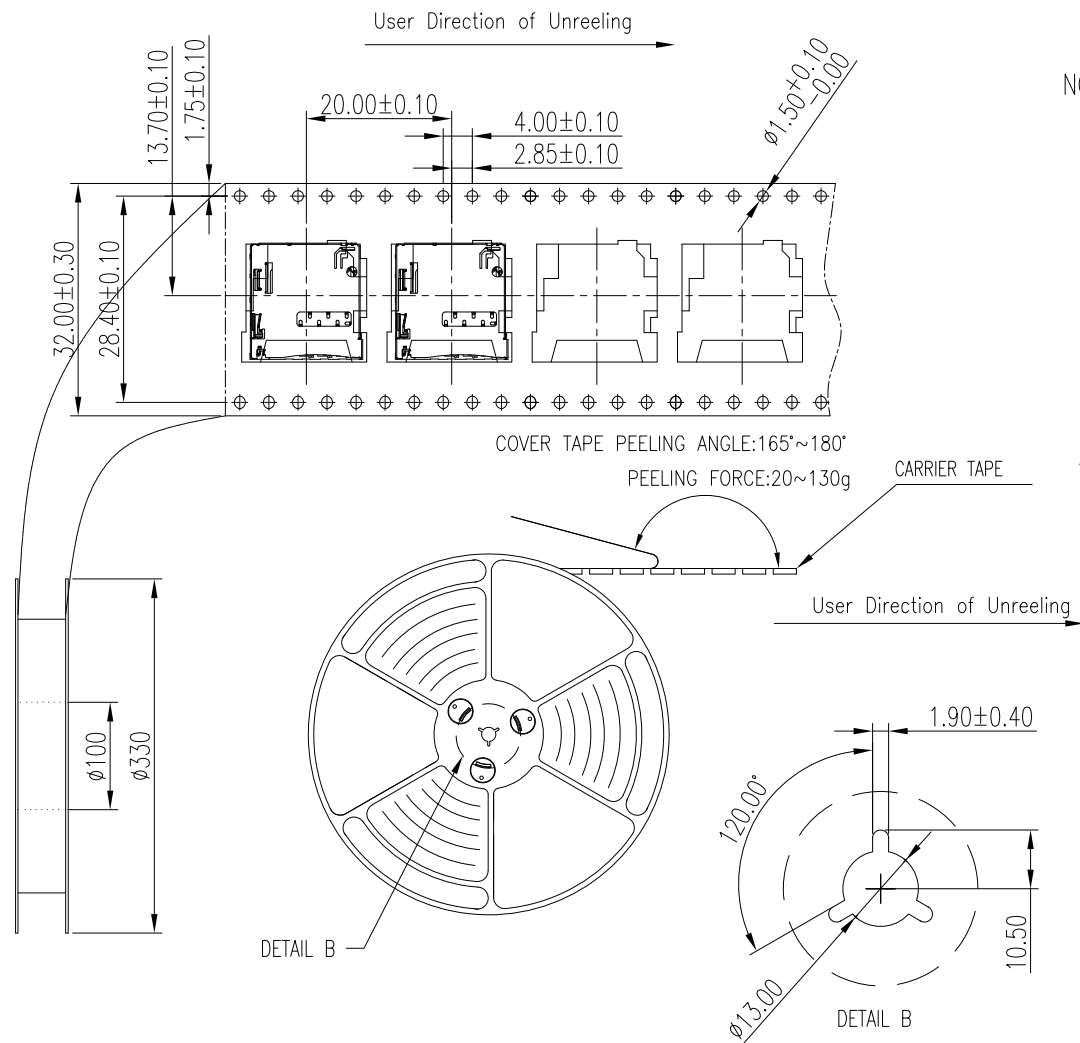


NOTES

1. NUMBER OF CONNECTORS: 1000PCS/REEL

2. LEAD TAPE LENGTH

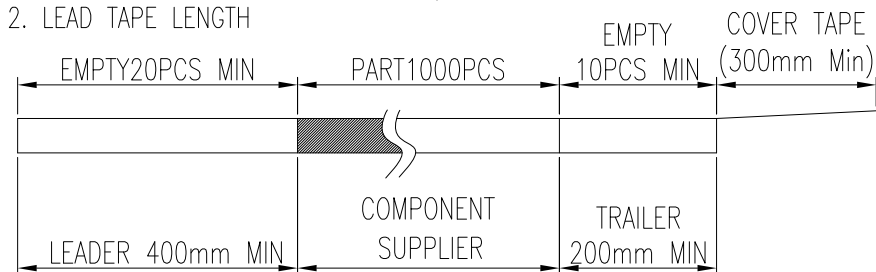

3. QUANTITY: 10000PCS/CARTON

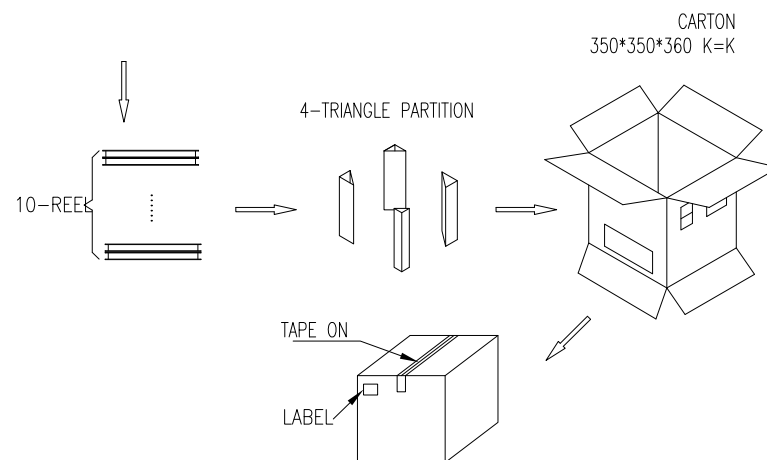

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISCP-W0112MAR-06-LF

SERIES

LEADFREE

06WAY

REEL

SWITCH CLOSED

METAL FOOT

HIGH 1.27mm

90°SMT
PAD TO PAD 1.10mm

DESCRIPTION: MICRO SIM H:1.27mm