

MATERIAL: Specification

Insulator: High Temperature Thermoplastic,
UL 94V-0.
Contact: Copper Alloy
SHELL: SUS


PLATING:

Contact: Plated 50u" Ni Overall Contact Au 1U,
pad Au
Shell: Plated 50u" Ni Overall, pad 1u

Electrical:

Current Rating : 0.5Amps.max
Voltage Rating : 5V AC/DC
Ambient Temperature Range : -40°C~+85°C
Storage Temperature Range : -40°C~+85°C
Ambient Humidity Range : 95% R.H. Max.
Contact Resistance: 100mΩ max.
Insulation Resistance: 1000MΩ min./500VDC
IR Reflow Temperature: 260°C
Mating Cycles: 3000Min Insertions

- C1:VCC
- C2:RST
- C3:CLK
- C4:RESERVED
- C5:GND
- C6:VPP
- C7:I/O
- C8:RESERVED

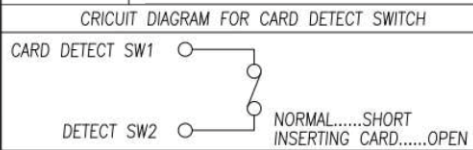

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PJECTION

照片框

ORDER INFORMATION


MISCP-W15E14AR-06-LF

SERIES | | | | LEADFREE
| | | | 06 WAY
| | | | REEL
| | | | SWITCH CLOSED
90°SMT | | | | 1.42mm HIGH
| | | | EAR WIDTH 15.10mm


DESCRIPTION: 1.43H Push Push Mirco SIM CARD

包裝作業圖示及說明 (PACKING OPERATION DIAGRAM & INSTRUCTION)


- 一.
- 1) 將成品一一放入包裝盤內, 依同一方向放入.
 - 2) 包裝時, 如圖所示.
 - 3) 一個包裝盤放置1000個成品.

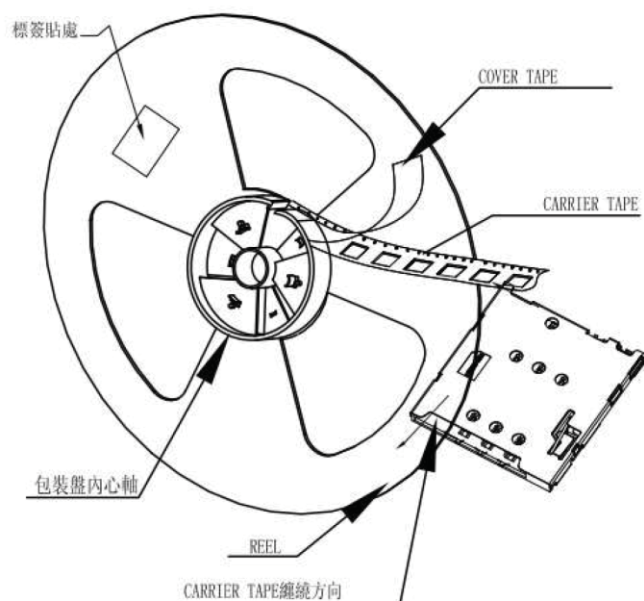

- 二.
- 1) 一只紙箱可放置5個包裝盤.
 - 2) 一只紙箱可放5000PCS的成品.
 - 3) 將成品放入包裝盤內, 包裝完後再裝箱.

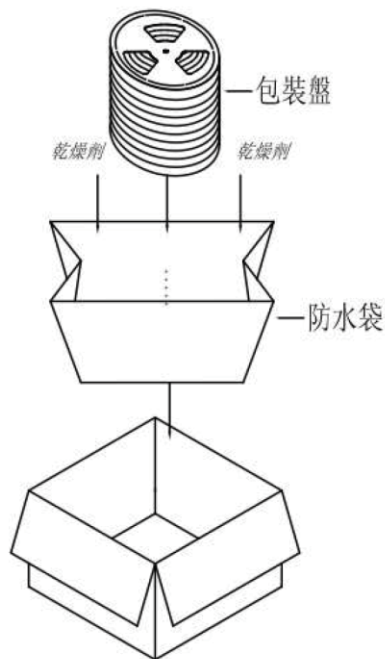

- 三.
- 1) RELL載帶尺寸圖.

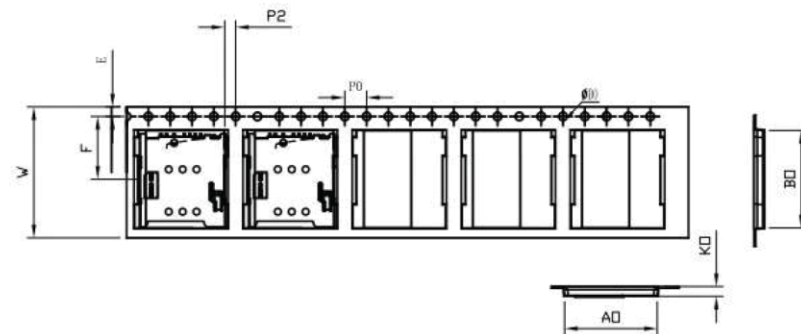

ITEM	W	A0	B0	K0	P	F	E	S0	D0	P0	P2	T
DIM	24.00±0.10	17.0 ±0.10	7.85±0.10	2.0 ±0.10	20.0 ±0.10	1.50±0.10	1.75 ±0.10	0.00 ±0.10	1.50±0.10	4.00±0.10	2.00±0.10	0.30±0.10
ALTERNATE												

產品單重: 0.48g
 每盤單重: 1Kg
 每箱單重: 5.1Kg (5000PCS)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

MISCP-W15E14AR-06-LF

SERIES | | | | | LEADFREE
 | | | | | 06 WAY
 | | | | | REEL
 | | | | | SWITCH CLOSED
 90°SMT | | | | | 1.42mm HIGH
 | | | | | EAR WIDTH 15.10mm

DESCRIPTION: 1.43H Push Push Mirco SIM CARD