

SOLDER AREA
 KEEP OUT AREA


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: STAINLESS STEEL, NICKEL PLATING
SOLDER PAD: STAINLESS STEEL, GOLD PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION


CURRENT RATING: 1.0 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

MICRO SIM CARD



MicroSIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

ELECTRIC FUNCTION	DETECT SWITCH
WITHOUT CARD	CLOSED
CARD INSERTED	OPEN



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±


PJECTION

照片框

ORDER INFORMATION

MISCP-W16E15AR-06-LF
SERIES | | | | LEADFREE
06 WAY
REEL
SWITCH CLOSED
HIGH 1.5mm
PAD TO PAD 16mm
90°SMT

DESCRIPTION: MICRO SIM CARD, 9PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE
H=1.50mm, FEMALE

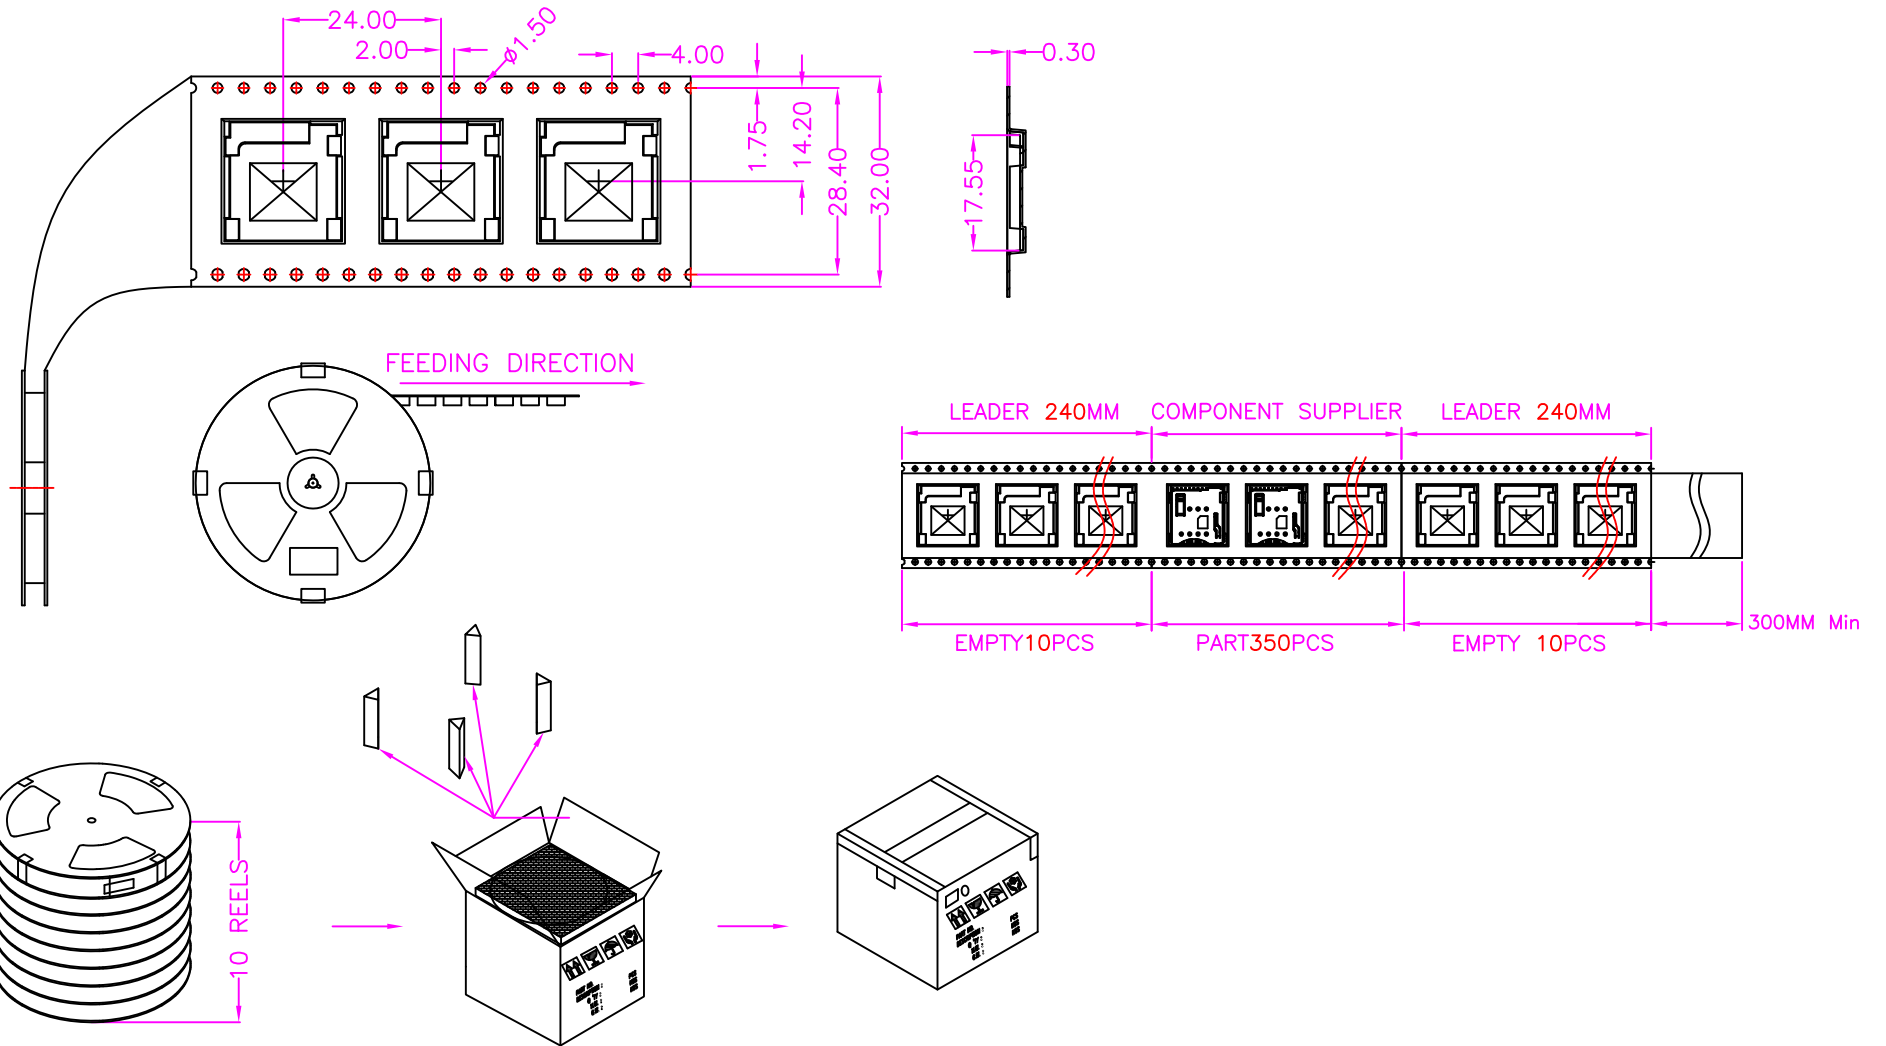

NOTE: 1000PCS/ REEL, 10000PCS/ 10 REEL/CARTON

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ±

照片框

ORDER INFORMATION

MISCP-W16E15AR-06-LF

SERIES

LEADFREE

06 WAY

REEL

SWITCH CLOSED

HIGH 1.5mm

PAD TO PAD 16mm

90°SMT

煜倫股份有限公司

www.morethanall.com

SIZE A4

PJECTION

DESCRIPTION: MICRO SIM CARD, 9PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE
H=1.50mm, FEMALE