
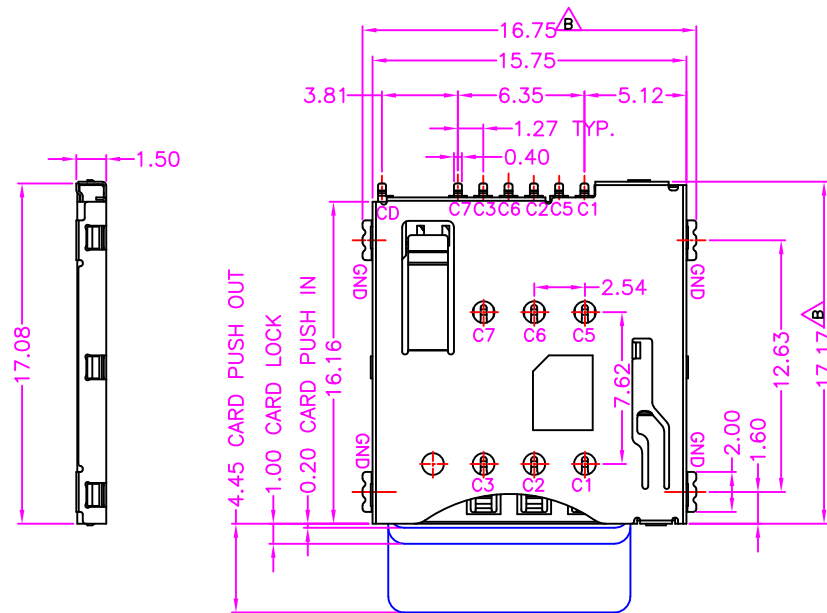


MicroSIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

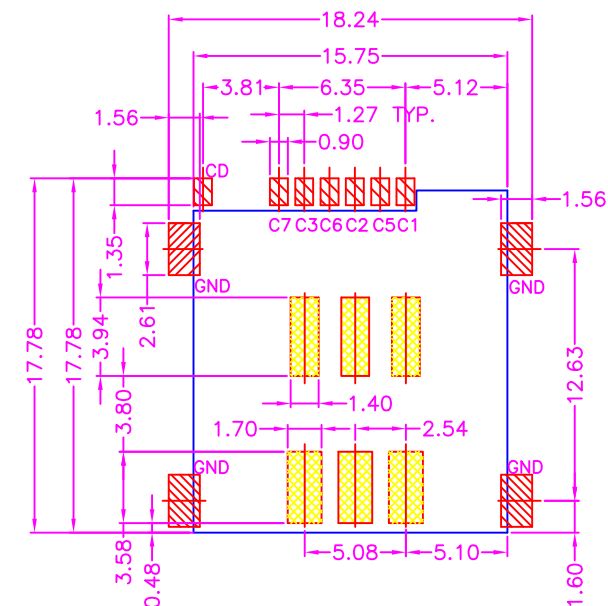

PAD AREA
 KEEP OUT AREA

P.C.B LAYOUT
TOP VIEW ± 0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: STAINLESS STEEL, NICKEL PLATING
 SOLDER PAD: STAINLESS STEEL, GOLD PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: $-20^{\circ}\text{C} \sim +85^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$ 5°


照片框

ORDER INFORMATION

MISCP-W16EBAR-06-LF

SERIES | | | | | LEADFREE
 90°SMT | | | | | 06 WAY
 | | | | | REEL
 | | | | | SWITCH CLOSED
 | | | | | BOTTOM CONTACT
 | | | | | EAR WIDTH 16.68mm

DESCRIPTION: MICRO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE, FEMALE, H=1.50mm

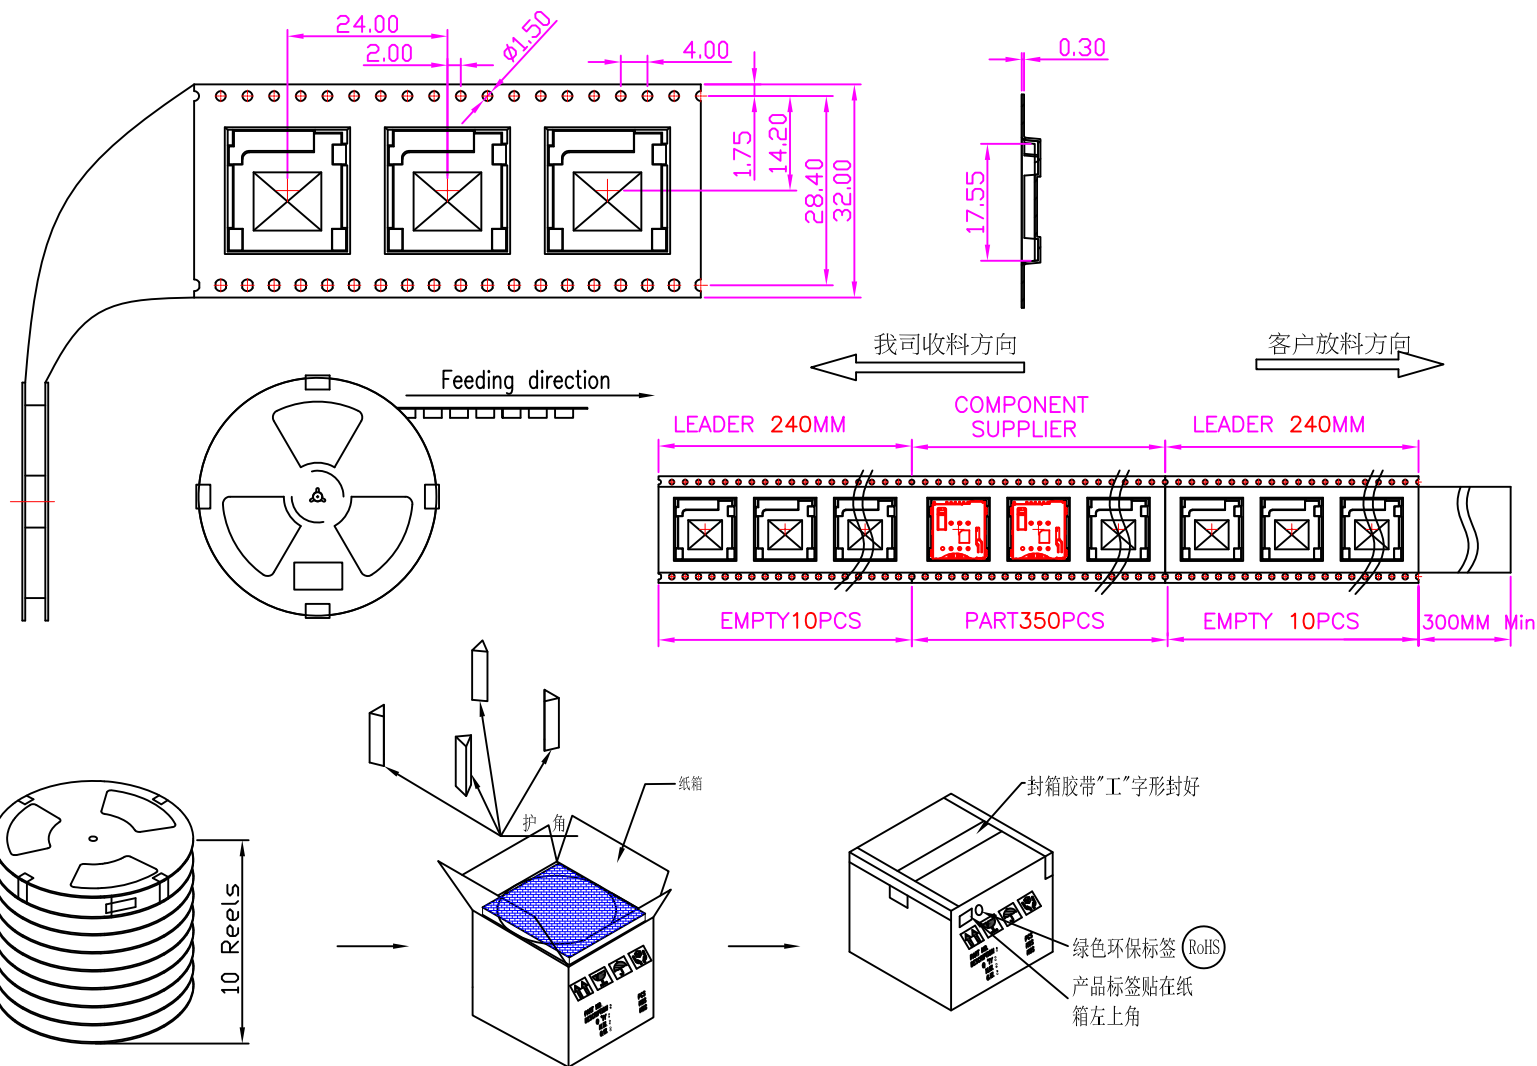

NOTE: 1000PCS/REEL, 10000PCS/10 REEL/CARTON

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$ 5°

PPOJECTION

照片框

ORDER INFORMATION

MISCP-W16EBAR-06-LF

SERIES | LEADFREE
06 WAY
REEL
SWITCH CLOSED
BOTTOM CONTACT
90°SMT
EAR WIDTH 16.68mm

DESCRIPTION: MICRO SIM CARD, 7PIN, PCB MOUNT, SMT, METAL SHIELD, PUSH PUSH TYPE, FEMALE, H=1.50mm