


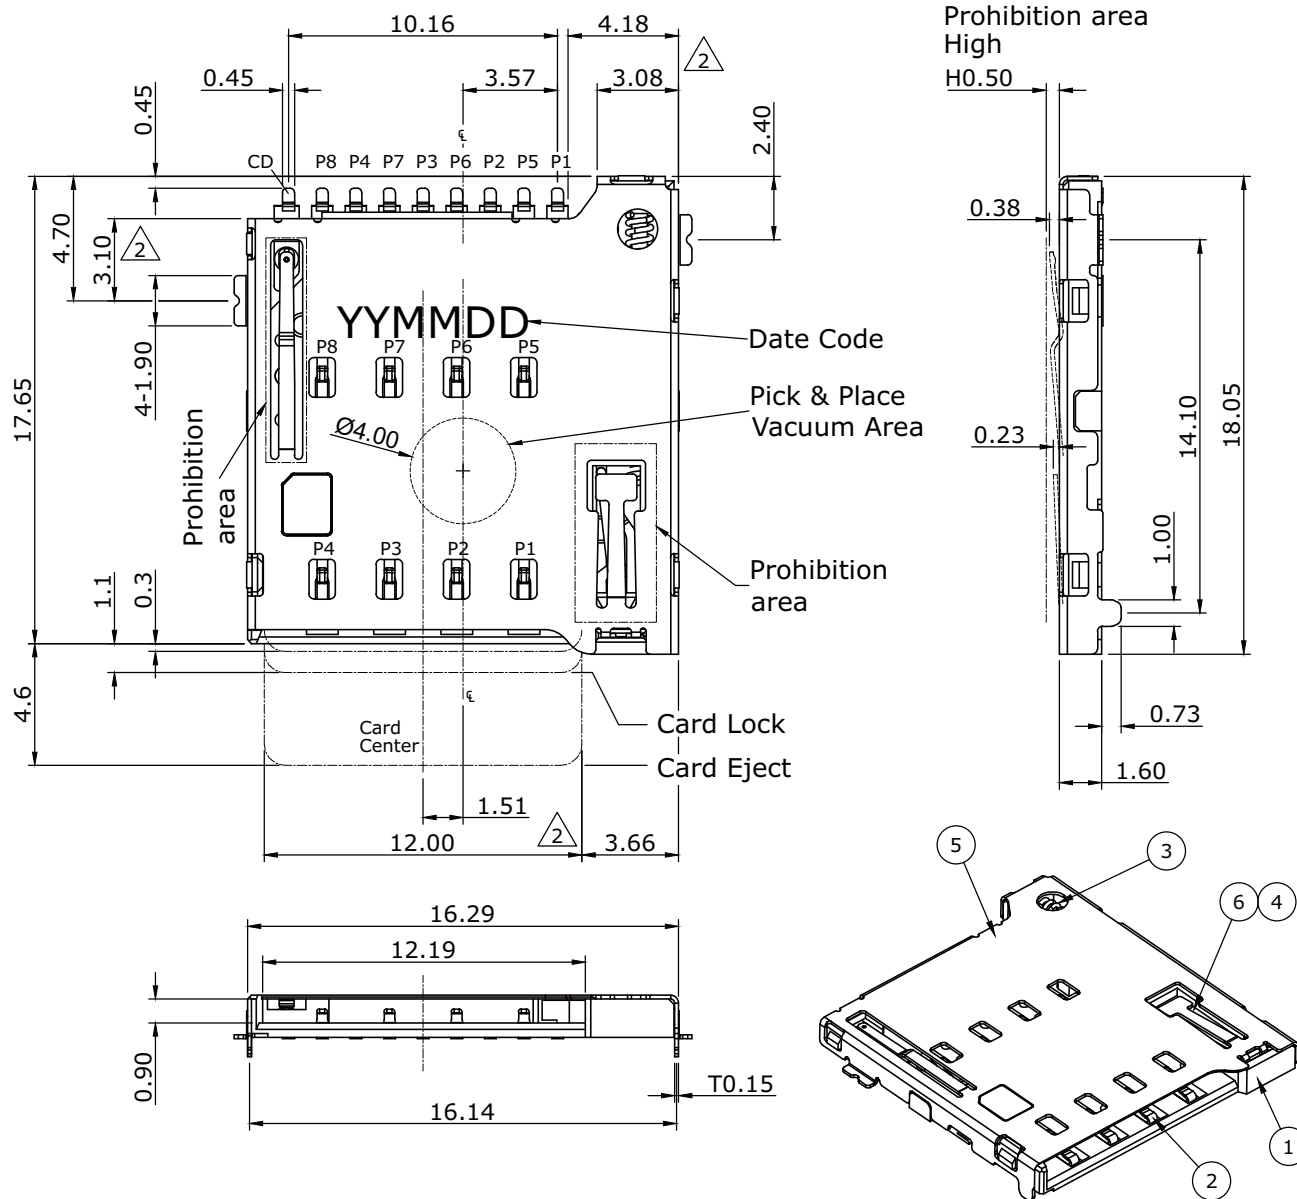

SPECIFICATION:

1. ELECTRICAL

1.1 Current Rating: 0.5A DC/AC

1.2 Voltage Rating: 10VDC/AC

1.3 Contact Resistance:

P1~P8: 100mΩ Max.

CD: 140mΩ Max.

1.4 Insulation Resistance: 1000MΩ Min.

1.5 Dielectric Withstanding Voltage:
500VAC for 1 minute

2. MECHANICAL

2.1 Durability: 5,000 Cycle

2.2 Insertion Force: 10NMax.

2.3 Extraction Force: 0.5NMin.

3. ENVIRONMENTAL

3.1 Operating temperature range:-25°C~+85°C

3.2 Storage temperature range:-25°C~+85°C

6	SLIDER	LCP E130i, UL94V-0, Black
5	SHELL	SUS304CSP-3/4H, 0.15t, 50u" nickel plated
4	CRANK	SUS304, 0.35d
3	SPRING	SWP-B, 0.20d, 80u" copper coating over 65u" nickel plated
2	CONTACT	C5210R-H, 0.12t, 5u" gold on contact area 1u" gold on tail area, under plated: 50u" nickel
1	HOUSING	LCP E130i, UL94V-0, Black
NO.	PART NAME	DESCRIPTION

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XXX ±

DATE

ANG ±

SIZE A4

PPOJECTION

ORDER INFORMATION

MISCP-W16MBA-08-LF

SERIES

LEADFREE

08 WAY

SWITCH CLOSED

BOTTOM CONTACT

16.14mm METAL FOOT


90°SMT

DESCRIPTION: Micro SIM Card Socket push-push type

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com



Connector terminal NO.	Pin Name
PIN 1	VCC:PWR signal and GND
PIN 2	RST:Reset singal
PIN 3	CLK:Clocking singal
PIN 4	Reserved
PIN 5	GND:PWR singal and GND
PIN 6	VPP:programming Voltage
PIN 7	I/O:serial date input/output
PIN 8	Reserved

Circuit Diagram for Card Detect Switch

