
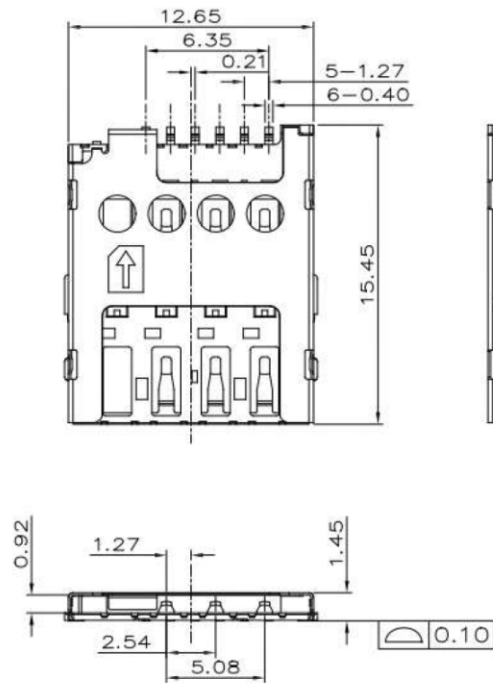



Pin1:VCC
Pin2:RST
Pin3:CLK
Pin4:Reserved
Pin5:GND
Pin6:VPP
Pin7:I/O
Pin8:Reserved

MICRO. SIM CARD

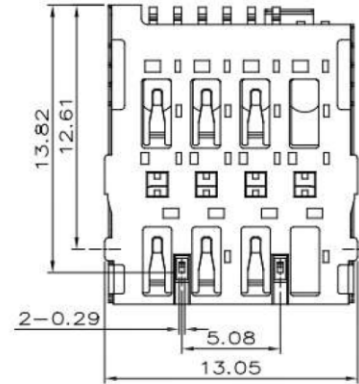

Material
Base: LCP ,black

shell:steel nickel plated foot of shell:gold plated

Material of contact:phosphor copper C5210 gold plated

NOTES:

1. ELECTRICAL SPECIFICATIONS:

CURRENT RATING: 0.5A.


VOLTAGE RATING: 5V.

CONTACT RESISTANCE: 50 MILL. OHM MAX.

INSULATION RESISTANCE: 1000 MEG. OHM MIN.

2. MECHANICAL SPECIFICATIONS:

DURABILITY: 5000 CYCLES MIN.

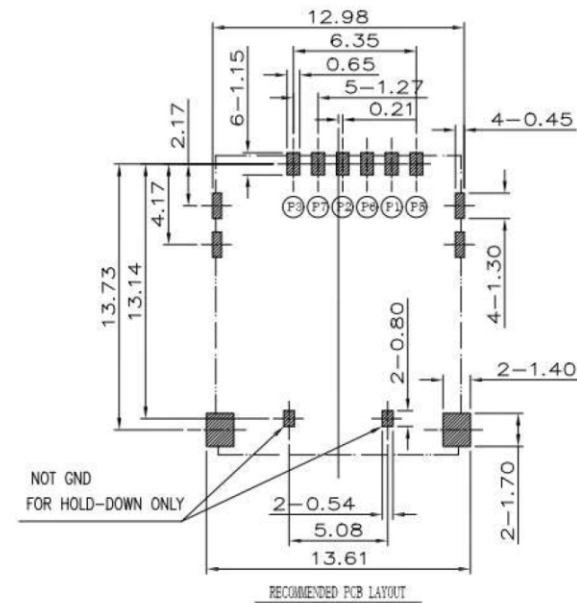

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ±

照片框

ORDER INFORMATION

MISCT-W0014X-06-LF

SERIES

LEADFREE

06WAY

NON POST

HIGH 1.45mm

90°SMT

DESCRIPTION: