


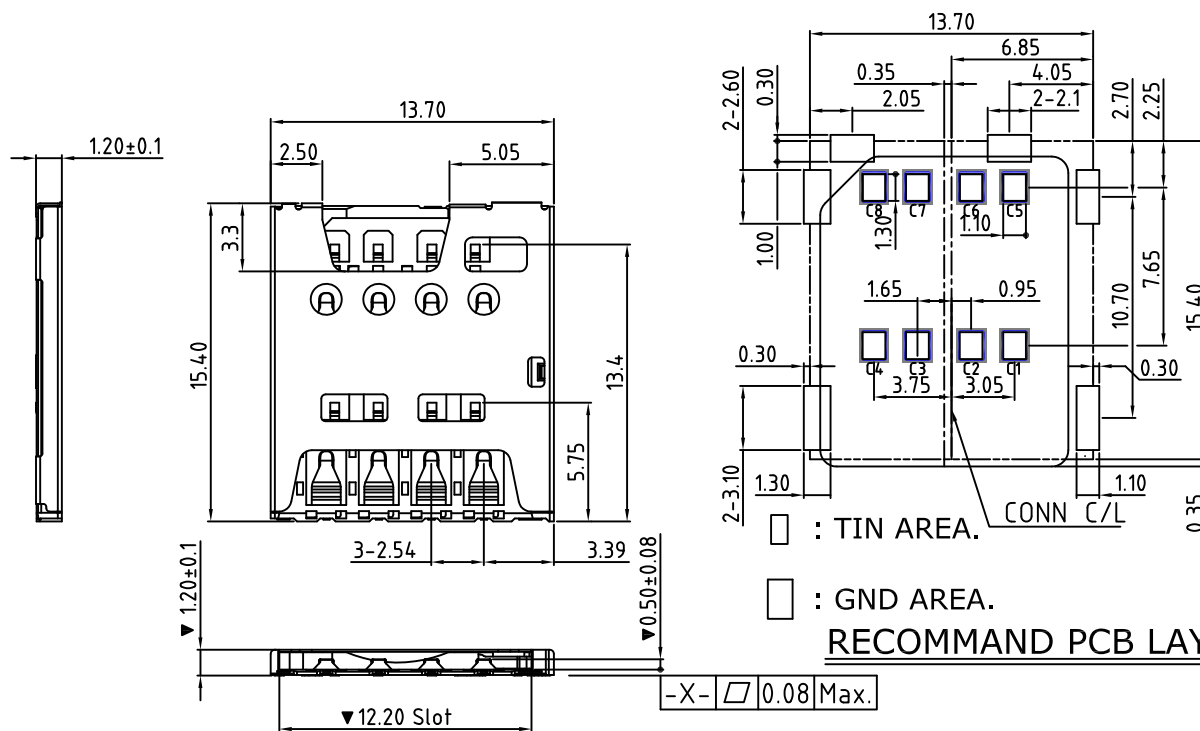


MATERIAL
 INSULATOR: HIGH TEMPERATURE THERMOPLASTIC, UL94 V-0 RATED.
 COLOR OF INSULATOR: BLACK
 CONTACT: COPPER ALLOY
 CONTACT FINISH: GOLD(Au 1-3u") ON MATING AREA; FLASH GOLD ON ;
 SOLDER TAILS.ALL OVER 50u" NICKEL UNDER-PLATED.
 SHELL: STAINLESS STEEL,SUS 304.
 GROUND PAD: COPPER ALLOY
 GROUND PAD: GOLD OVER NICKEL UNDER-PLATED
 DURABILITY: 3,000 CYCLES MINIMUM
 MicroSIM HAVE SWITCH ON/OFF FUNCTION.

ELECTRICAL
 CONTACT RESISTANCE: 100 MILLIOHMS MAXIMUM
 INSULATION RESISTANCE: 1000M OHM MINIMUM AT 500 VDC.
 DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC/RMS FOR ONE MINUTE
 CURRENT RATING: 0.5A MAXIMUM

ENVIRONMENT
 OPERATING TEMPERATURE: -20°C TO +70°C

RECOMMEND PCB LAYOUT

Micro-SIM CARD	
PIN NO.	NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved

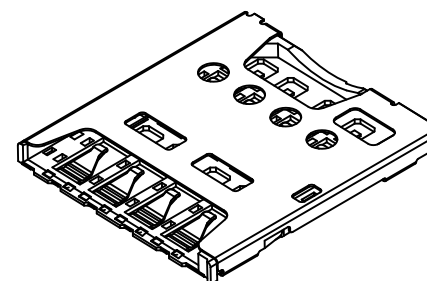

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ±

ORDER INFORMATION

MISCT-W0712X-08-LF

SERIES

LEADFREE
 08WAY
 NON POST
 HIGH 1.2mm
 PAD TO PAD 7.65mm
 90°SMT

DESCRIPTION: