

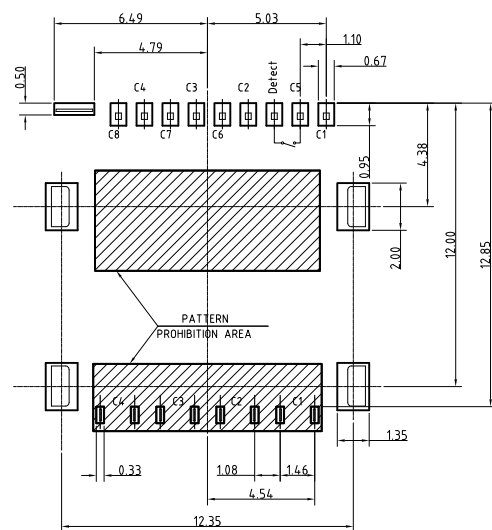


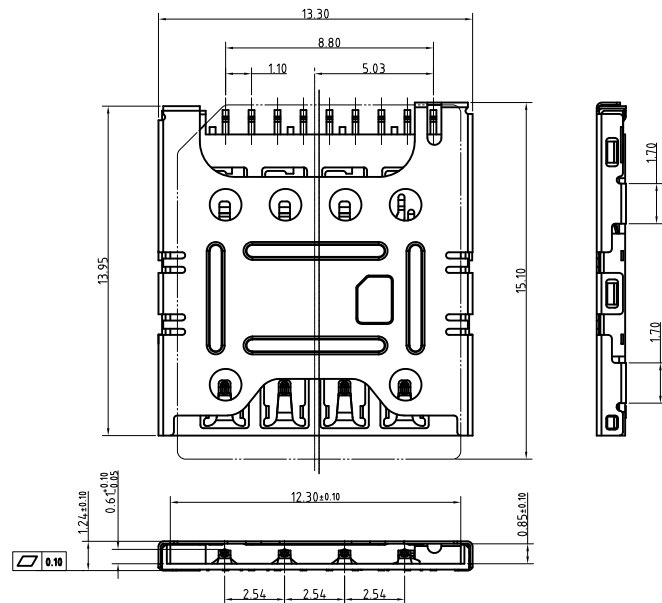

Recommended PCB Layout
Tolerance: ± 0.05

Pin Assignments


PIN	Name
C1	Vcc
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	Vpp
C7	I/O
C8	Reserved

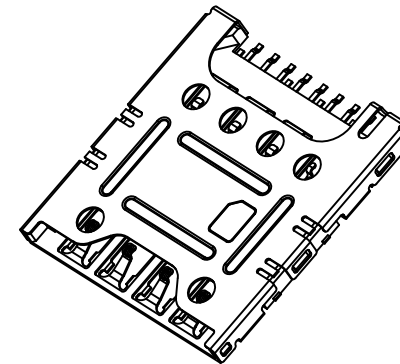

NOTE:

△ Material & Finish See Table;

2. Circuit Diagram For Switch



3. Characteristic:

- 3-1. Current Rating :1A max.
- 3-2. Contact Resistance:100mOhms max
- 3-3. Insulation Resistance:100MOhms min./500VDC
- 3-4. Dielectric Withstanding Voltage:500VAC/1minute
- 3-6. Durability: 2000 Cycles
- 3-7. Operating Temperature:-25° C to+85° C

4. Please Contact PROMAX Sales Representative to Verify Product Details.

4	Shell	Stainless Steel	Nickel Under Plated Overall. g/f plated on solder tails
3	Housing	Thermoplastics	Black, UL94V-0
2	Detect	Copper Alloy	Gold Flash on Solder Tails and Contact Area; Nickel Under Plated Overall.
1	Terminal	Copper Alloy	Gold Flash on Solder Tails and Contact Area; Nickel Under Plated Overall.
Item	Part Name	Material	Description

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$ 2°

PPOJECTION



照片框

ORDER INFORMATION



MISCP-W12E12BR-08-LF

SERIES | | | | | LEADFREE
| | | | | 08 WAY
| | | | | REEL
| | | | | SWITCH OPEN
| | | | | HIGH 1.24mm
| | | | | PAD TO PAD 12.35mm
90°SMT

DESCRIPTION: MICRO-SIM8+1P-1. 24H


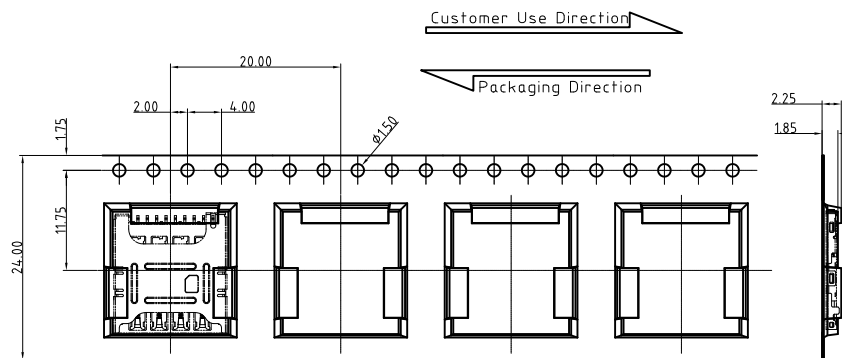


Reel with Product
10 Reel

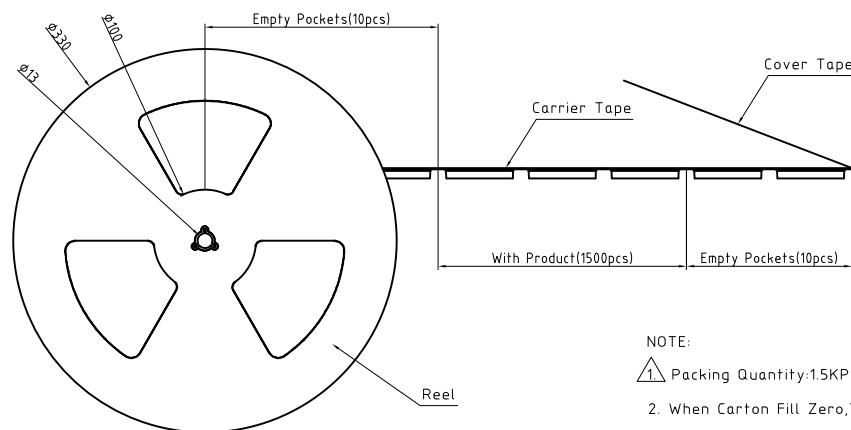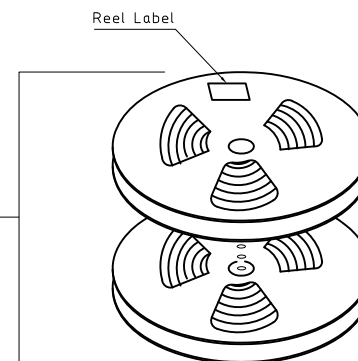

NOTE:

1. Packing Quantity: 15Kpcs/Reel, 15Kpcs/Carton;
2. When Carton Fill Zero, Then Fill of Polyethylene Foam;

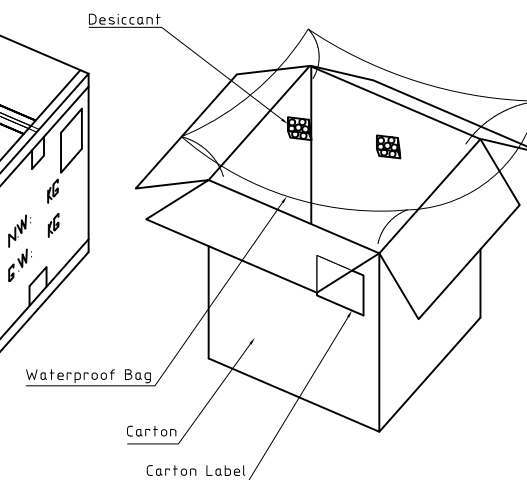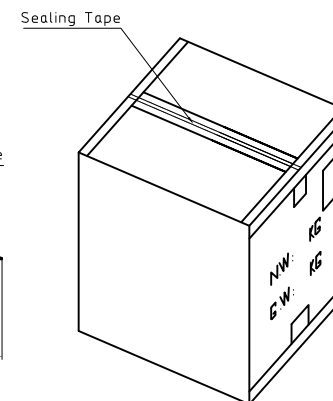

10	Sealing Tape	/	/	5	Product	15Kpcs	/
9	Carton Label	1	/	4	Reel Label	10	/
8	Carton	1	340X340X300	3	Reel	10	Blue,
7	Waterproof Bag	1	/	2	Cover Tape	/	Transparent, Width=21.7mm;
6	Desiccant	2	30g/bag	1	Carrier Tape	/	Transparent, Width=24.0mm;
Item	Part Name	Q'ty	Description	Item	Part Name	Q'ty	Description

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

MISCP-W12E12BR-08-LF

SERIES
90°SMT
LEADFREE
08 WAY
REEL
SWITCH OPEN
HIGH 1.24mm
PAD TO PAD 12.35mm

DESCRIPTION: MICRO-SIM8+1P-1. 24H