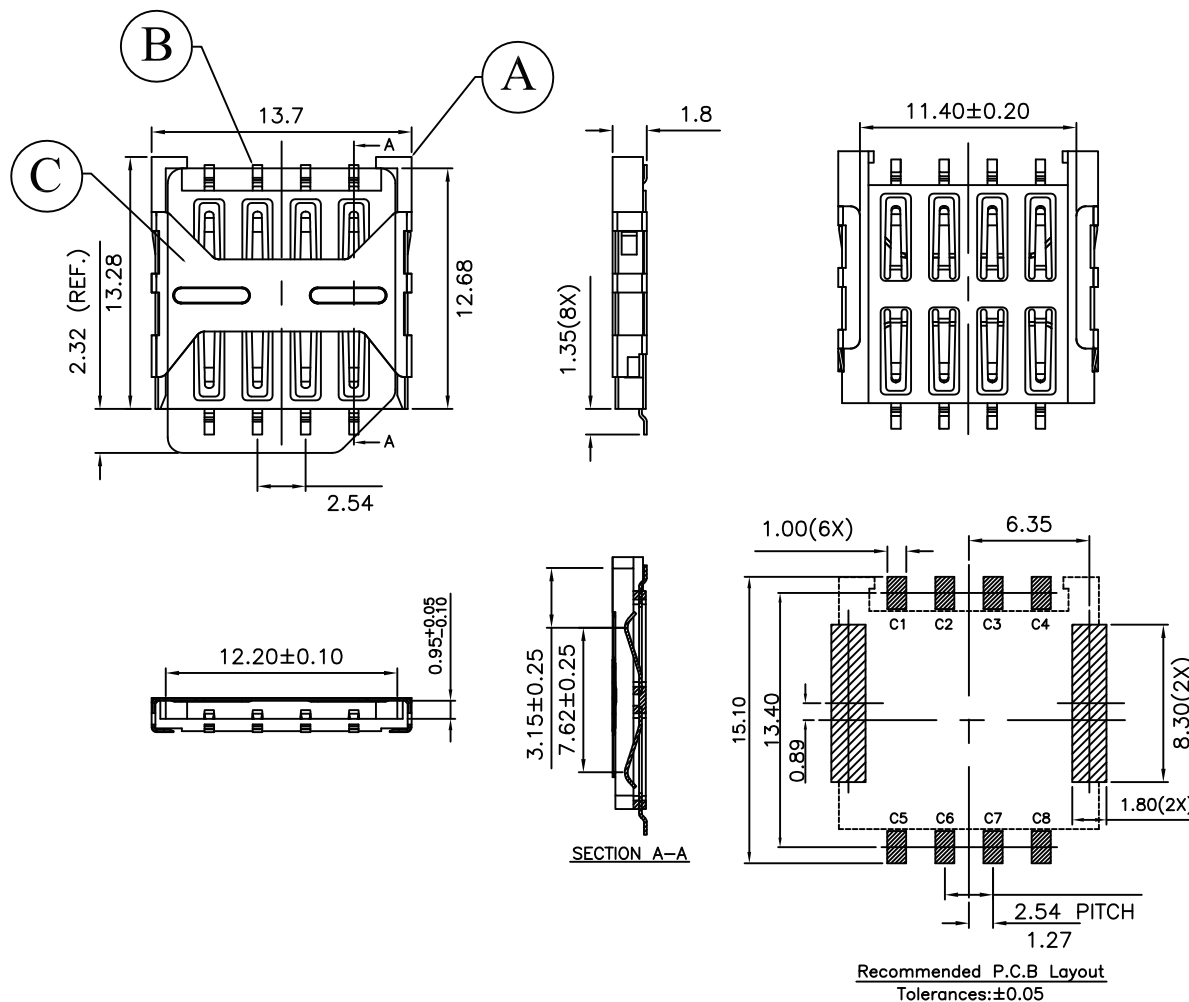


SPECIFICATION:

1. ELECTRICAL

- 1.1 Current Rating: 0.5A
- 1.2 Voltage Rating: 5VDC
- 1.3 Contact Resistance: 100mΩ
- 1.4 Insulation Resistance: 100MΩ
- 1.5 Dielectric Withstanding Voltage: 100VAC for 1 minute

2. MECHANICAL

- 2.1 Durability: 5000 Cycle
- 2.2 Contact Normal Force : 0.2N~0.6N

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C to +85°C
- 3.2 Storage temperature range: -40°C to +85°C

4. SOLDER ABILITY

- 4.1 Recommended IR Reflow Temperature: 260°C

Vcc	RST	CLK	NA	GND	Vpp	I/O	NA
C1	C2	C3	C4	C5	C6	C7	C8

PIN ASSIGNMENT

MATERIAL AND FINISH AS BELOW		
A	Housing	LCP UL94V-0, Color:Black
B	Contact	Phosphor Bronze T=0.15, Contact Area: Gold Plated
C	Shell	Stainless Steel, Solder Tail:Gold Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.20
ANG ±

照片框

ORDER INFORMATION

MISCT-W1318X-08-LF

SERIES
LEADFREE
08WAY
NON POST
HIGH 1.8mm
PAD TO PAD 13.4mm
90°SMT

DESCRIPTION: Micro SIM Socket 8Pin SMD Type, 15u" Gold Plating