



PCB LAYOUT

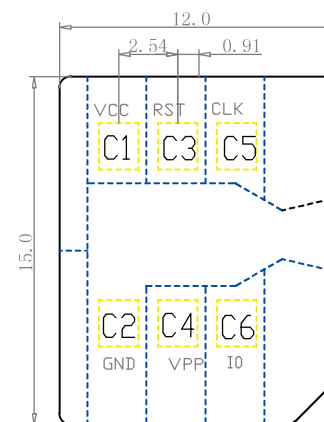

MICRO SIM



備註:

1.材質:

1.1 膠芯: LCP UL94V-0

1.2 端子: 磷銅,半金錫,霧錫100μ", 觸點鍍金1μ"

1.3 接地腳: 不銹鋼, 霧錫100μ",

1.3 外殼: SUS,

2.主要特性:

2.1 額定電流: 1.0A

2.2 接觸阻抗: 50mΩ MAX

2.3 絕緣阻抗: 100MΩ MIN 250V DC

2.4 耐壓測試: 250V AC

2.5 沾錫性: 溫度235±5℃, 時間5±0.5s

2.6 使用壽命: 3000次

2.7 耐溫性: 烤箱測試: 溫度250±5℃, 時間2分鐘

2.8 工作環境: 溫度: -30℃~+80℃; 濕度: 80% MAX

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ±

SIZE A4

P PROJECTION

照片框

ORDER INFORMATION

MISCV-W14EA15X-06-LF

SERIES

LEADFREE

06 WAY

NON POST

HIGH 1.5mm

90°SMT

SINGLE EAR

PAD TO PAD 14.9mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MICRO SIM 掀蓋式1.5H