


P.C.B LAYOUT  
TOP VIEW ±0.05

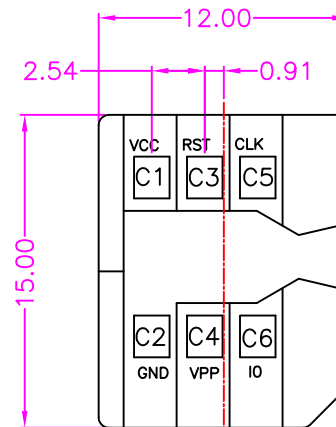

MICRO SIM

MICRO SIM CARD	
PIN NO.	DESCRIPTION
P1	VCC
P2	GND
P3	RST
P4	VPP
P5	CLK
P6	I/O

**MATERIALS**  
 HOUSING: LCP (UL 94V-0), BLACK  
 SHELL: SUS  
 TERMINAL: COPPER ALLOY, GOLD PLATED

**SPECIFICATION**  
 CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 100m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+85°C

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PJECTION

照片框

ORDER INFORMATION

MISCV-W14EA18X-06-LF

SERIES | | | | LEADFREE

90°SMT | | | | SINGLE EAR

06 WAY

NON POST

HIGH 1.8mm

PAD TO PAD 14.9mm

DESCRIPTION: MICRO SIM CARD, 6 PIN, PCB MOUNT, SMT, METAL SHIELD HINGE TYPE, FEMALE