


SECTION A-A

P.C.B LAYOUT
TOP VIEW ±0.05

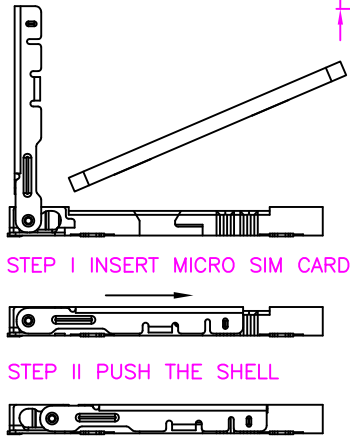

STEP I INSERT MICRO SIM CARD
STEP II PUSH THE SHELL
STEP III FINISH

MATERIALS
HOUSING: LCP (UL 94V-0), BLACK
SHELL: SUS
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION
CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

MICRO SIM CARD	
Pin No.	NAME
C1	VCC
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	I/O
C8	RESERVED


RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISCV-W14EB15XR-08-LF

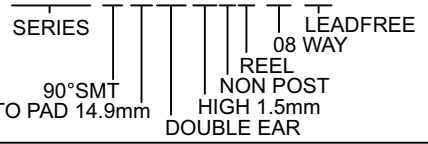



MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X. ± 0.40
CHECKED BY GENIUS		.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XXX ± 0.10
DATE		ANG ±
SIZE A4	P PROJECTION	

DESCRIPTION: MICRO SIM CARD, 8 PIN, PCB MOUNT, SMT, METAL SHIELD, HINGE TYPE, FEMALE

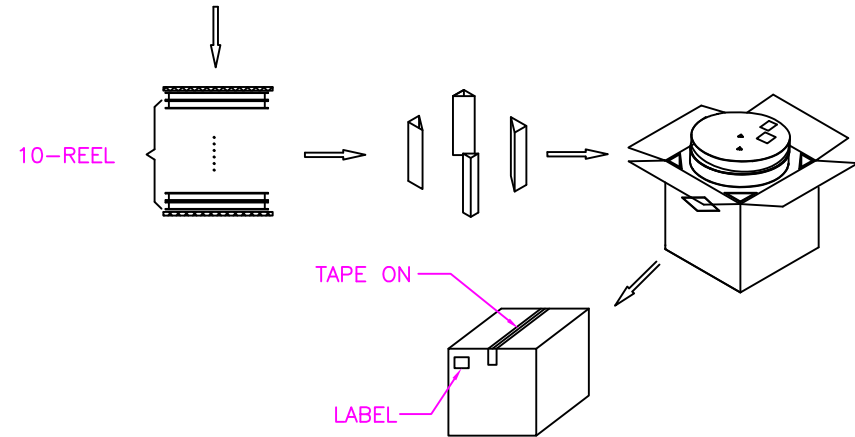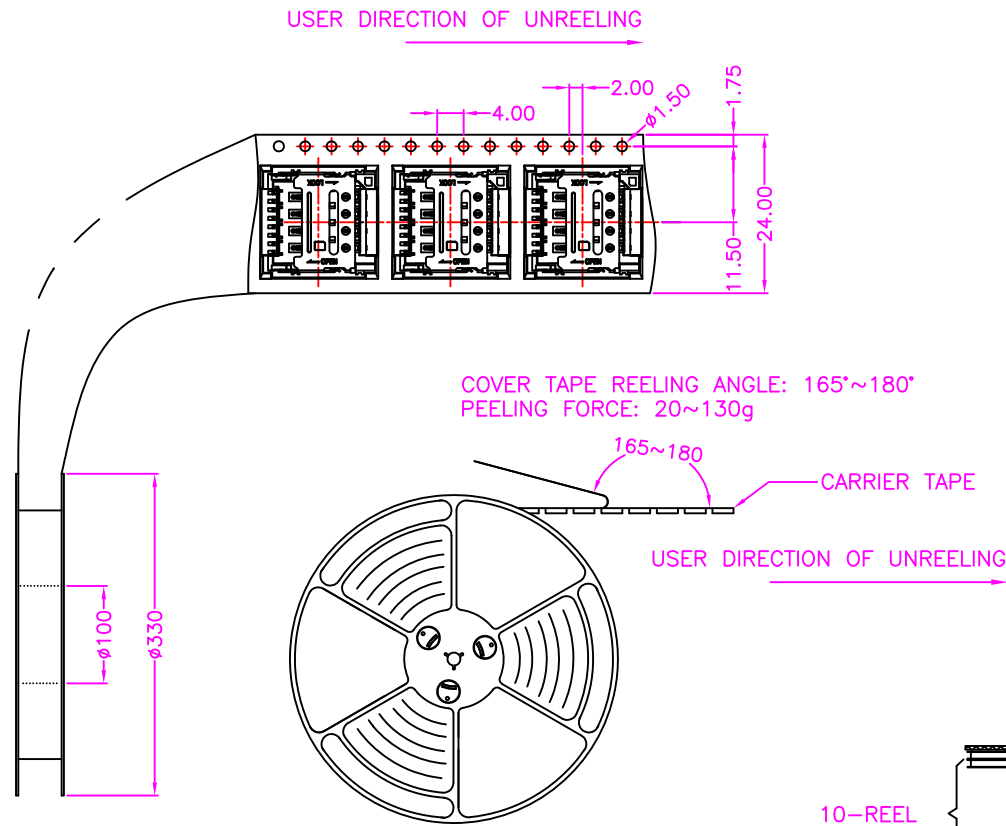

NOTE: 1300PCS/REEL, 13000PCS, 10 REEL/CARTON

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY		X. ± 0.40
CHECKED BY GENIUS		.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XX ± 0.20
DATE		.XXX ± 0.10
		ANG ±

照片框

ORDER INFORMATION

MISCV-W14EB15XR-08-LF
SERIES | | | | | LEADFREE
| | | | | 08 WAY
| | | | | REEL
90°SMT | | | | | NON POST
PAD TO PAD 14.9mm | | | | | HIGH 1.5mm
| | | | | DOUBLE EAR

煜倫股份有限公司

www.morethanall.com

SIZE A4 PPROJECTION

DESCRIPTION: MICRO SIM CARD, 8 PIN, PCB MOUNT, SMT, METAL SHIELD, HINGE TYPE, FEMALE