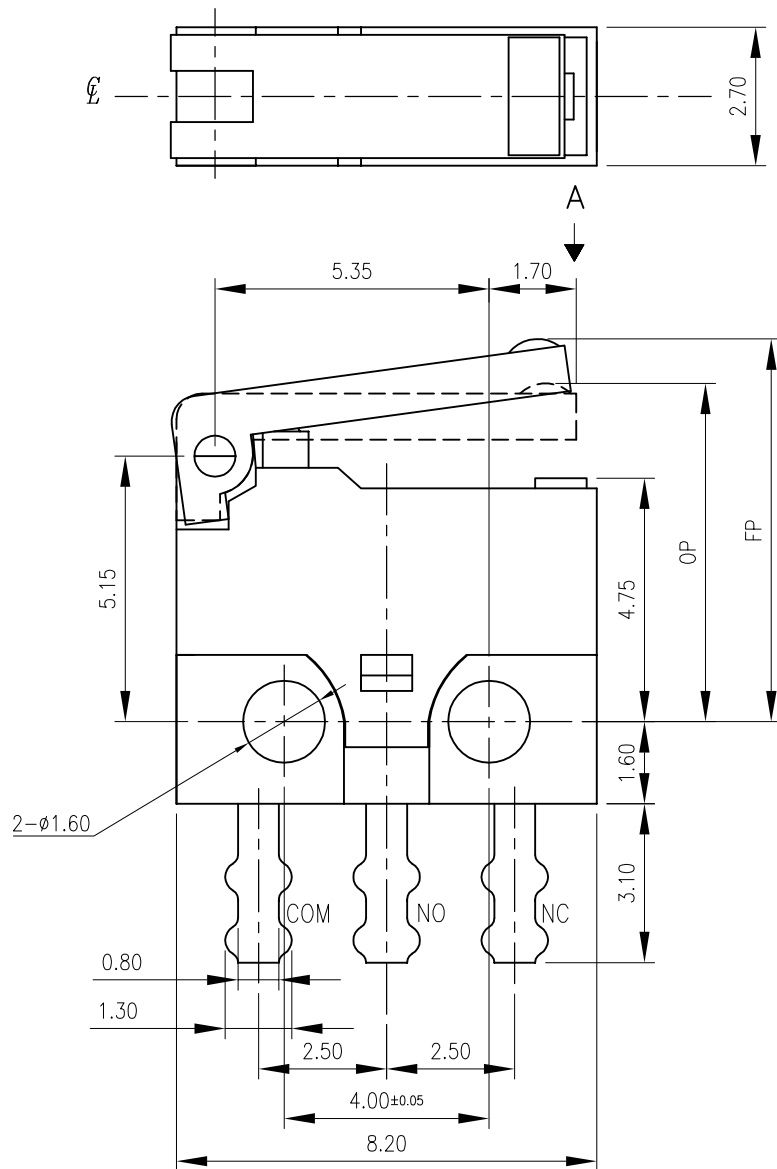


NOTE:


1. OPERATING CHARACTERISTICS

ITEM	SPEC.
OPERATING FORCE	50gf(0.50N) MAX.
RELEASE FORCE	3gf(0.03N) MIN.
PRETRAVEL	1.80mm MAX.
OVERTRAVEL	0.30mm MIN.
MOVEMENT DIFFERENTIAL	0.70mm MAX.
OPERATING POSITION	6.7±0.5mm
FREE POSITION	8.0mm MAX.


2. ELECTRICAL RATINGS 0.5A @30VDC

3. GENERAL TOLERANCE ±0.15mm

4. THE OPERATING CHARACTERISTICS ARE FOR OPERATION IN THE A DIRECTION ↓

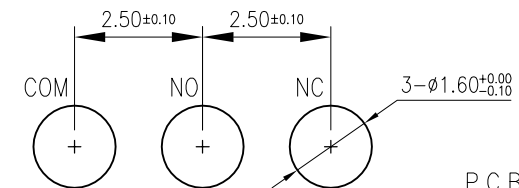

P.C.B LAYOUT



CIRCUIT DIAGRAM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISW-D25L07-050-LF

SERIES

LEADFREE

50gf

LEVER 7.0mm

CONTACT PITCH 2.50mm

DIP 180°

DESCRIPTION: MICRO SWITCH