


类 型	压接微动开关	品 名	MISW-D51-60A3
1. 功能规格			
1.1 额定值 125VAC 3A/ 250VAC 1.5A		1.5 自由位置 (FP)	7.35±0.2mm
		1.6 动作位置 (OP)	7.0±0.2mm
1.2 接触电阻 (CR)	≤100mΩ (初始值)	1.7 行程 (PT)	
1.3 操作力 (OF)	60±20gf	1.8 回弹力 (RF)	
1.4 灵敏度 (BT)		1.9	
2. 可靠度参数			
2.1 机械寿命	1,000,000 CYCLES	2.5 耐焊工艺	手工焊
2.2 电气寿命	10,000 CYCLES	2.6 适用温度	-25° C - +65° C
2.3 绝缘电阻	≥100MΩ DC500V (初始值)	2.7 适用湿度	<85%RH
2.4 耐压强度	AC500V 1 minute (初始值)	2.8	

3. 尺寸规格图

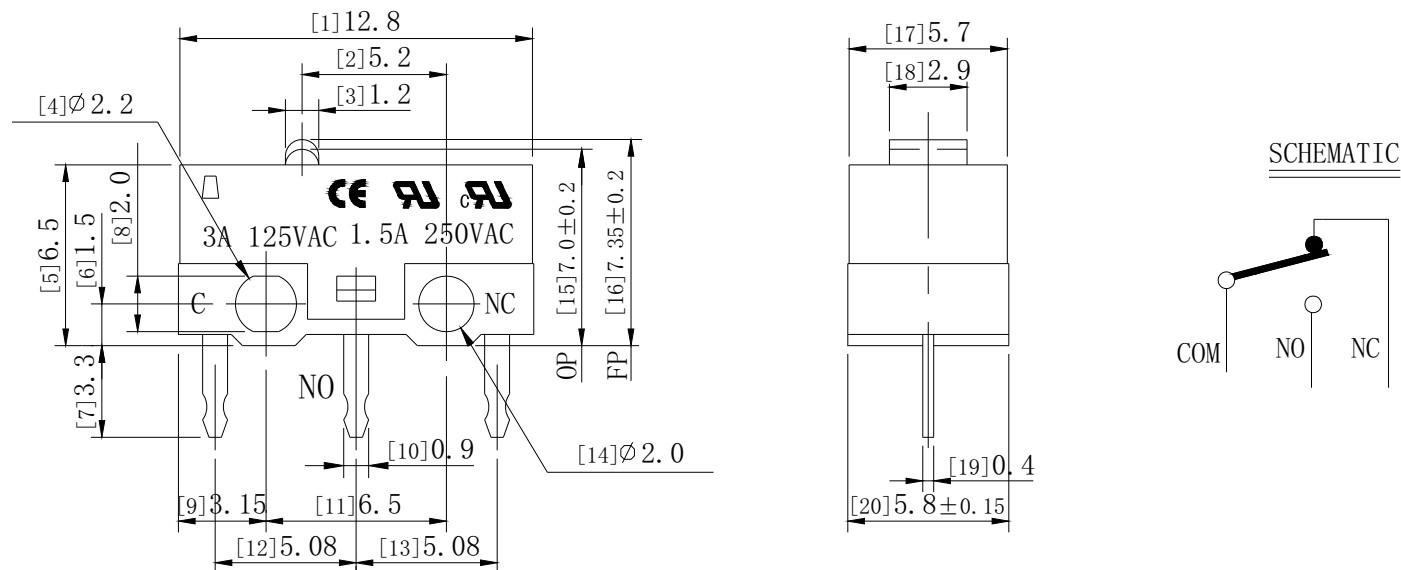

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
X ± 0.20
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISW-D51-060A3-LF

SERIES

LEADFREE

3A

PITCH

DIP 180°

DESCRIPTION: