



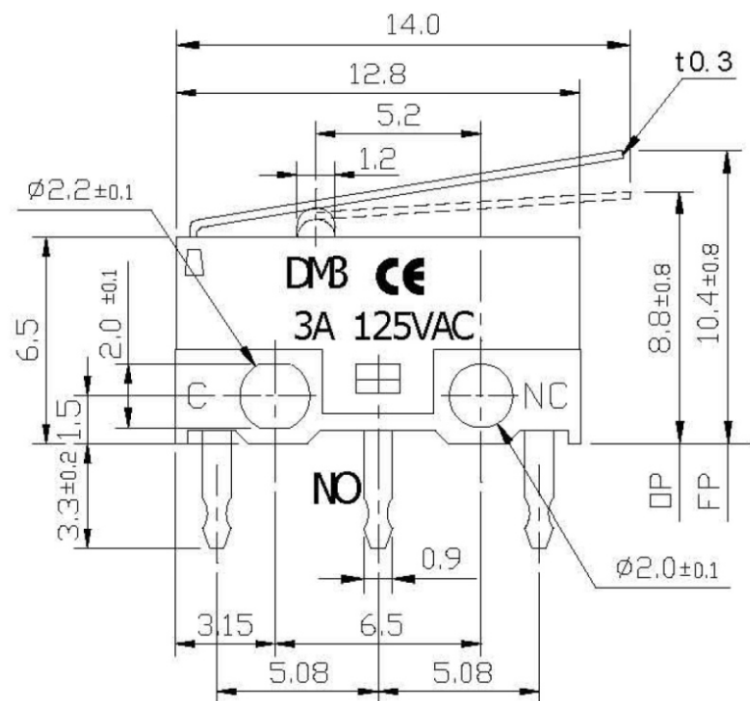

1. 功能规格			
1.1 额定值 AC125V 3A/DC12V 50mA	1.5 自由位置(FP)	10.4± 0.8mm	
	1.6 动作位置(OP)	8.8± 0.8mm	
1.2 接触电阻(CR)	≤ 100mΩ (初始值)	1.7 行程(PT)	
1.3 操作力(OP)	20~50gf	1.8 回弹力(RF)	
1.4 灵敏度(BT)		1.9	
2. 可靠度参数			
2.1 机械寿命	500000 CYCLES	2.5 耐焊接热	245± 5°C 3 Sec.
2.2 电气寿命	30000/500000 CYCLES	2.6 适用温度	-25° C - +65° C
2.3 绝缘电阻	≥ 100MΩ DC500V (初始值)	2.7 适用湿度	<85%RH
2.4 耐压强度	AC500V 1 minute (初始值)	2.8	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MISW-D51L13-050-LF

SERIES

LEADFREE

50g

LEVEL 13.5mm

CONTACT PITCH 5.08mm

DIP 180°

DESCRIPTION: