


类 型	压接微动开关	品 名	
1. 功能规格			
1.1规格值 AC125V 3A/AC250V 1.5A		1.5自由位置 (FP)	12.8±0.8mm
		1.6动作位置 (OP)	10.8±0.8mm
1.2接触电阻 (CR)	≤100mΩ (初始值)	1.7行程 (PT)	
1.3操作力 (OF)	30gf	1.8灵敏度 (BT)	
1.4回弹力 (RF)		1.9	
2. 可靠度参数			
2.1机械寿命	500,000 cycles	2.5焊接工艺	手工焊
2.2电气寿命	10,000 cycles	2.6操作温度	-25℃ ~ +65℃
2.3绝缘电阻 (IR)	≥100MΩ DC500V (初始值)	2.7储存湿度	<85%RH
2.4耐压强度 (WV)	AC500V 1 Minute(初始值)	2.8	

3. 尺寸规格图

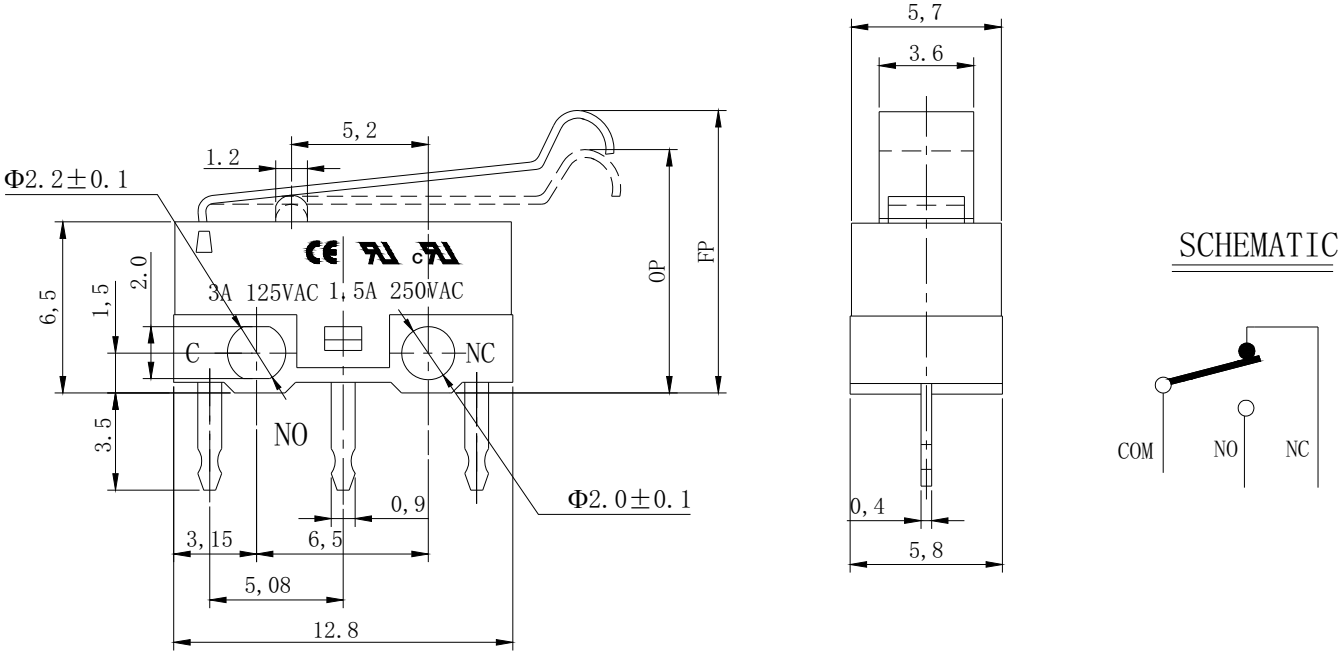

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

MISW-D51L14J-030-LF
SERIES J TYPE
30g LEADFREE
LEVEL 14.4mm
CONTACT PITCH 5.08mm
DIP 180°

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4

X.±
.X±
.XX±
.XXX±
ANG ±

PPOJECTION