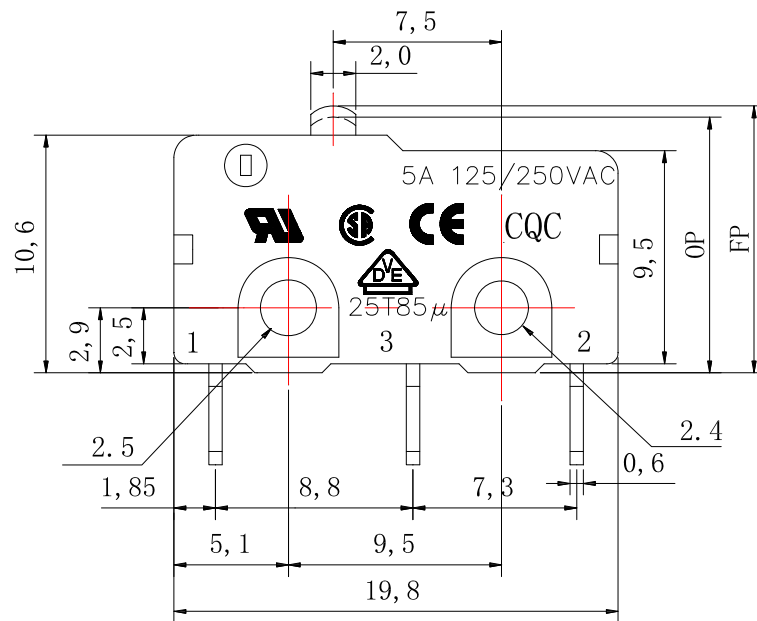


SCHEMATIC

1. Functional spec.	
1.1 Rated Voltage	125/250 VAC ; 5.0 A
1.2 Contact Resistance	$\leq 100\text{m}\Omega$ (Initial value)
1.3 Operating Force	$115 \pm 30\text{gf}$
1.4 Free Position	$11.9 \pm 0.3\text{ mm}$
1.5 Operating Position	$11.3 \pm 0.35\text{ mm}$
2. Reliable Rating	
2.1 Mechanical Life	1,000,000 CYCLES
2.2 Electrical Life	10,000 CYCLES
2.3 Insulation Resistance	$\geq 100\text{M}\Omega$ DC 500V (Initial value)
2.4 Withstand Voltage	AC 1,000V 1 minute (Initial value)
2.5 Operating Temper	$-25^{\circ}\text{C} - +85^{\circ}\text{C}$
2.6 Ambient Humidity Used	<70% RH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^{\circ}$

PPOJECTION

照片框

ORDER INFORMATION

MISW-D87-115-LF

SERIES

LEADFREE

115g

CONTACT PITCH 8.8+7.3mm
DIP 180°

DESCRIPTION: SWITCH