


SCHEMATIC DIAGRAM 电路图



UL 3GPA125V ~ μ 40T85
CQC CE 3(0.5)A250V ~

3A 30VDC KW10
3(0.5)A 125/250V ~ μ 40T85
C NO NC


Specifications 技术特性表

RATINGS 额定值	3GPA125V ~ μ 40T85
TEMPERATURE 温度等级	3(0.5)A250V ~
ELECTRONICAL LIFE 电气寿命	10000次
Insulation resistance 绝缘电阻	>100MΩ
Test voltage 耐电压	AC1000V
Contact resistance 接触电阻	<50mΩ
Operating force 动作力	<0.23N
Operating Position 动作位置	7±1.2mm

Parts List 零件材质表

No.	Name 名称	Material 材料
1	Plunger 开关子	Plastic PBT(白色) 工程塑料
2	Cover 盖	Plastic PBT(黑色) 工程塑料
3	Moving piece 可动片	Beryllium alloy 铍青铜
4	Support 支架	Brass alloy H65, Silver plated 黄铜, 镀银
5	Case 基座	Plastic PBT(白色) 工程塑料
6	NO Terminal 常开端子	Brass alloy H65, Silver plated 黄铜, 镀银
7	Contact 电触点	AgNi10 银-镍
8	NC Terminal 常闭端子	Brass alloy H65, Silver plated 黄铜, 镀银
9	Contact 电触点	AgNi10 银-镍
10	Moving arm 动臂	Stainless steel SUS304 不锈钢

Safety authentication 安全认证

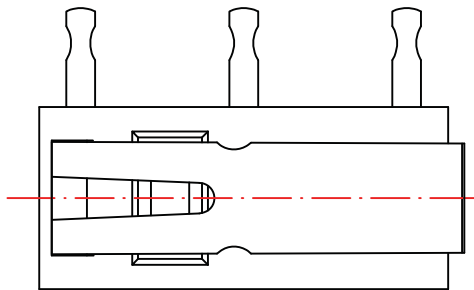

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PJECTION

煜倫股份有限公司

www.morethanall.com

ORDER INFORMATION

MISW-RV51L13-023-LF

SERIES

23g

LEVEL 13.5mm

CONTACT PITCH 5.08mm

REVERSED

DIP 90°

LEADFREE

CONTACT PITCH 5.08mm

REVERSED

DIP 90°

DESCRIPTION: Micro Switch