



SWEETA PRODUCTS CORPORATION

Switch Type	Micro Switches	MODEL NO.	
1. Functional spec.			
1.1 Rated Voltage	125/250VAC	1.6 Free Position	11.9±0.3mm
1.2 Rated Current	5A	1.7 Operating Position	11.3±0.35mm
1.3 Contact Resistance	≤50mΩ (Initial value)	1.8 Position Travel	
1.4 Operating Force	115±30gf	1.9 Return Force	
1.5 Bounce Time		1.10	
2. Reliable Rating			
2.1 Mechanical Life	1,000,000 CYCLES	2.5 Soldering Technic	Hand Soldering
2.2 Electrical Life	10,000 CYCLES	2.6 Operating Temper	-25℃ - +85℃
2.3 Insulation Resistance	≥100MΩ DC500V (Initial value)	2.7 Ambient Humidity Used	<85% RH
2.4 Withstand Voltage	AC1000V 1 minute (Initial value)	2.8	

3. Dimension Drawing

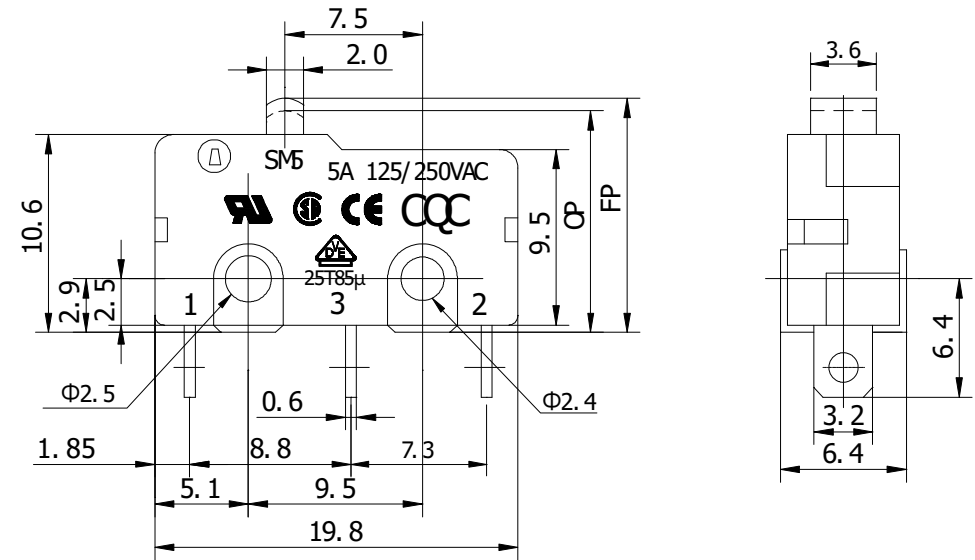

SCHEMATIC



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

MISW88-S3-115-LF

SERIES

LEADFREE

115g OPERATING FORCE
SOLDER 3.2Ø

DESCRIPTION: