

NOTES:

ELECTRICAL:



1. VOLTAGE RATING: 125V AC.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30 mΩ MAX.
4. INSULATION RESISTANCE: 500 MΩ MIN @ 500V DC.
5. DIELECTRIC STRENGTH: 1000V AC 50Hz or 60Hz, 1MIN.

MECHANICAL:


1. INSERT MATERIAL: UL94V-0.
2. CONTACT MATERIAL: $\phi 0.46\text{mm}$ C51000 (QSn4-0.3) PHOSPHOR BRONZE GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE: 20N Max.
4. RETENTION STRENGTH: 50N pendant $60\pm 5\text{s}$.
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:


1. STORAGE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$ RELATIVE HUMIDITY<70%.
2. OPERATION: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

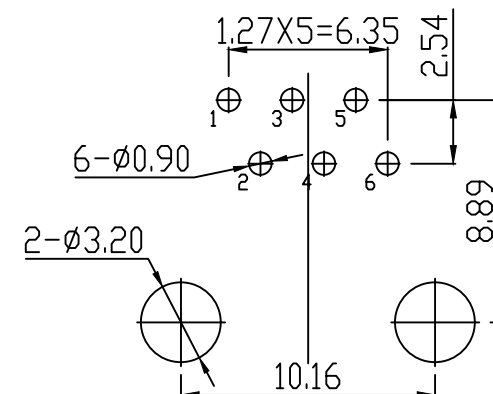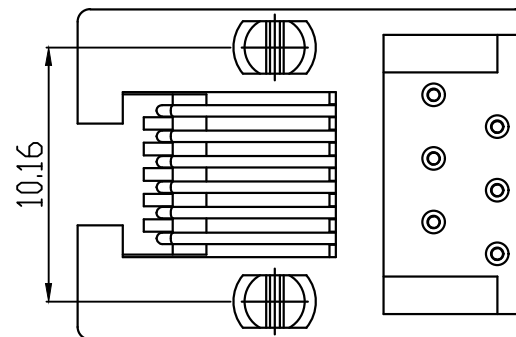

PC Board Layout

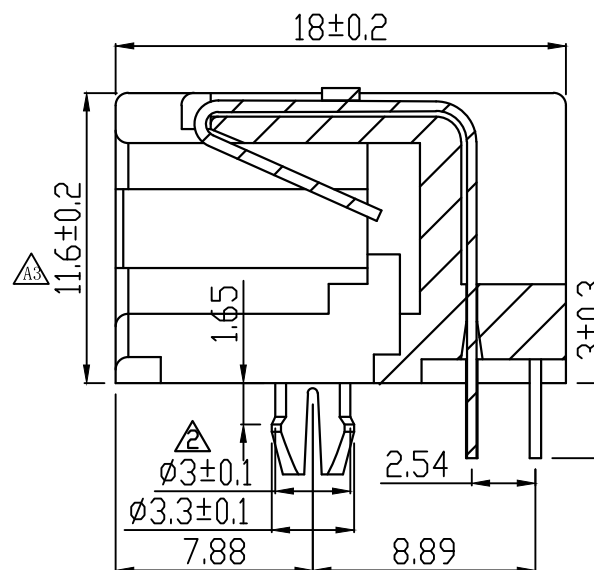

SECTION A-A

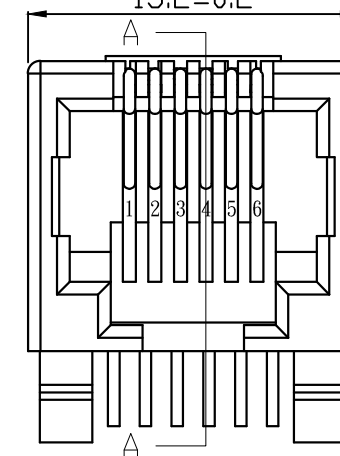

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MJ11-KX01-0606-LF
SERIES 6P6C LEADFREE
GOLD FLASH
NON EAR
BLACK

DESCRIPTION: