



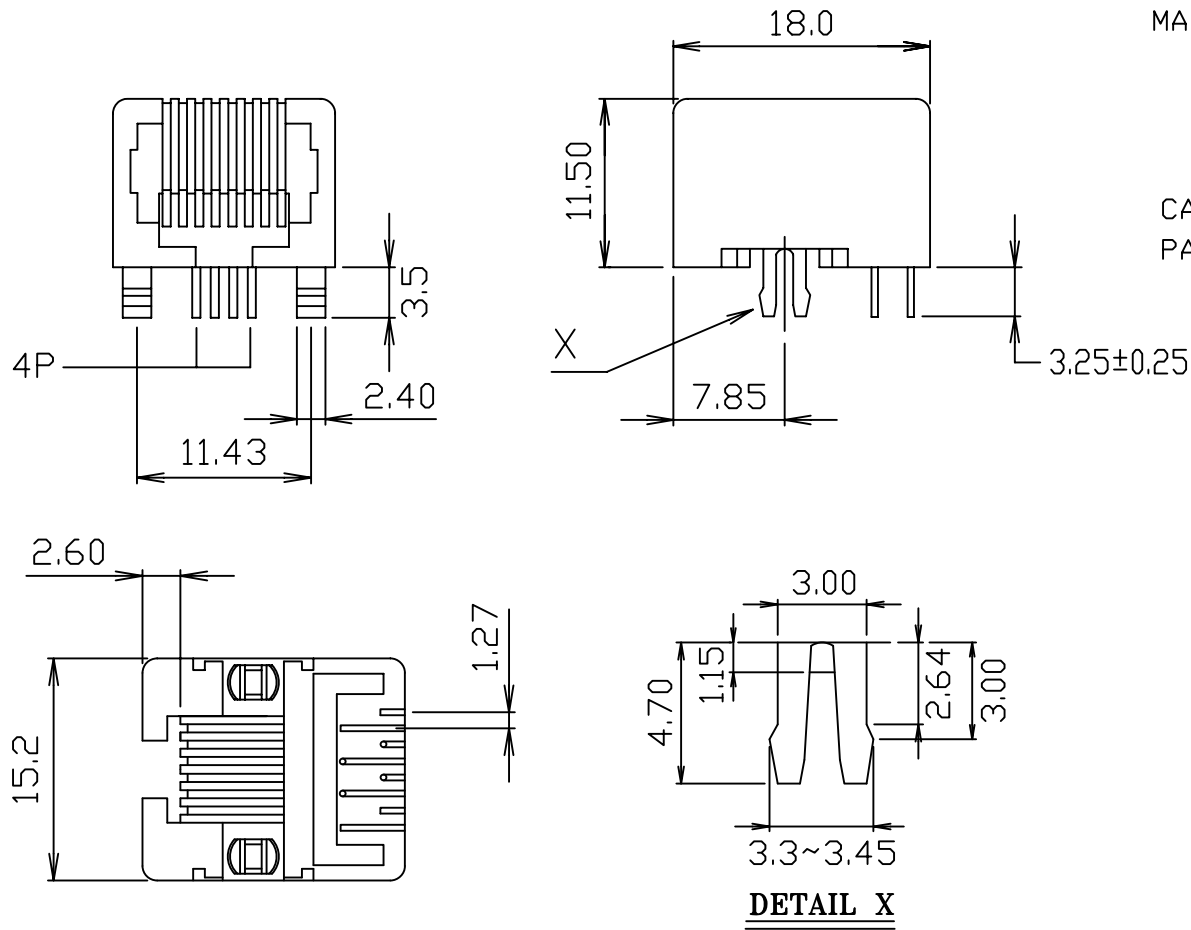

MATERIAL: HOUSING-PBT POLYESTER UL94V-0
 MIXED GLASS FIBER.
 STANDARD COLOR-BLACK
 CONTACTS-0.45mm DIAMETER PHOS-BRONZE
 PLATED WITH HARD GOLD.
 CAVITY CONFORMS TO FCC RULES AND REGULATIONS
 PART 68,SUBPART F.

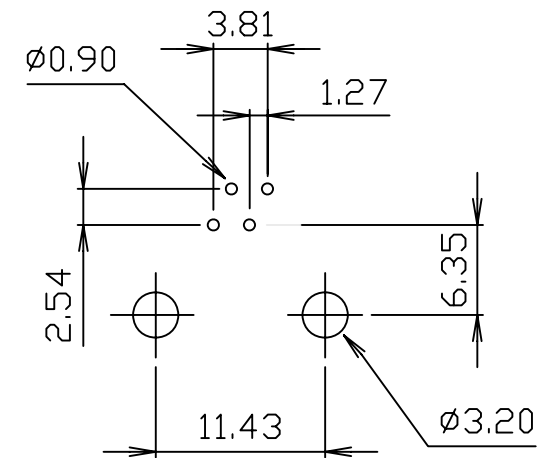

PC Board Layout

Environmental temperature:= -40deg to =85deg
 Working temperature: = same
 Resistance (connection pins) to solder heat: = 230deg
 Resistance (housing material) to solder heat: = 180deg

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

MJ11-KX06-0804-LF

SERIES 8P4C LEADFREE
 06u" GOLD
 NON EAR
 BLACK

DESCRIPTION: 8POSITION SIDE ENTRY VERY LOW PROFILE, PCB JACK