

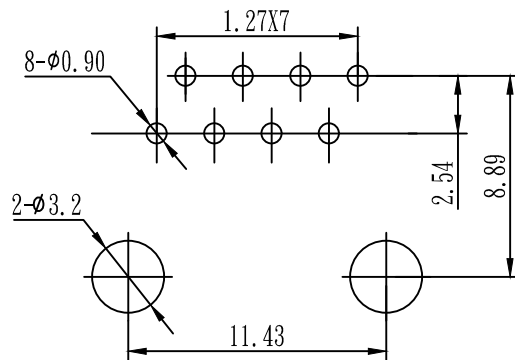
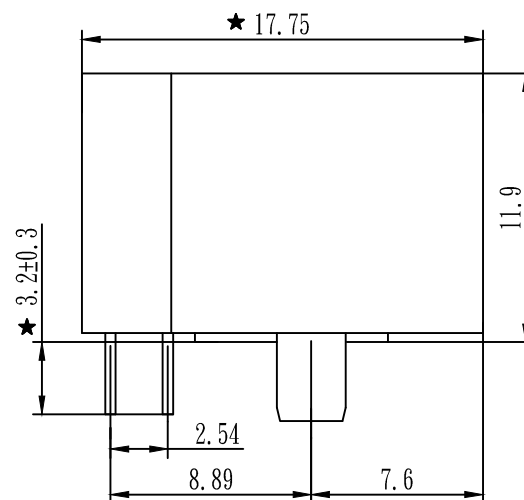


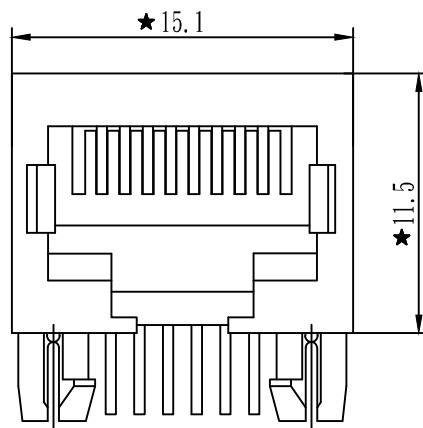

PC Board Layout

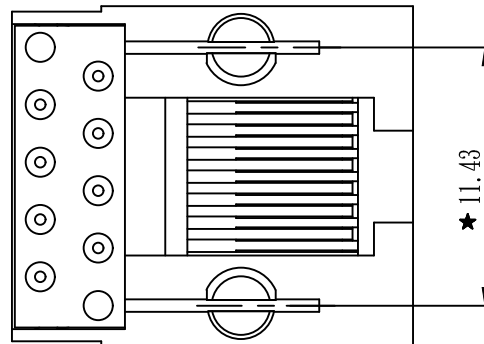

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING: 1.5 AMP.
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH: 1000 VAC RMS 50Hz or 60Hz, 1MIN.

MECHANICAL:

1. HOUSING & INSERT MATERIAL: PBT UL94V-0.
2. CONTACT MATERIAL: DIAMETER 0.45MM PHOSPHOR BRONZE
GOLD PLATING OVER NICKEL.
3. MATING/UNMATING FORCE : 2.2KG.F MAX.
4. RETENTION STRENGTH: 7.7KG.F MIN BETWEEN JACK AND PLUG.
5. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C ~ +85°C RELATIVE HUMIDITY<70%.
2. OPERATION: -40°C ~ +85°C.

Remark:

The mark with ★ is the key inspection dimension for QC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION


照片框

ORDER INFORMATION


MJ11A-KXxx-0808-LF

SERIES 8P8C LEADFREE
03:3u" GOLD
06:6u" GOLD
15:15u" GOLD
BLACK NON EAR





DESCRIPTION:

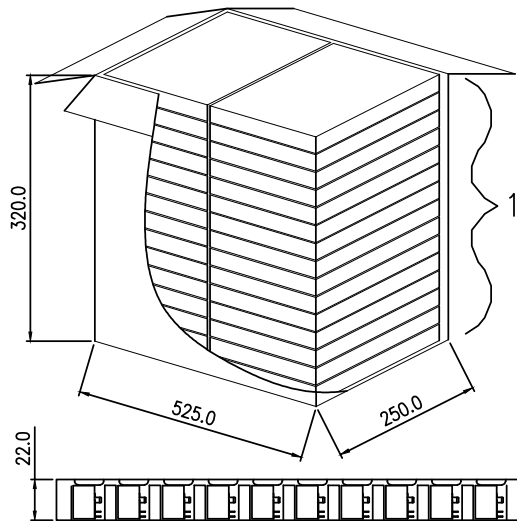

16*2=32盒/箱

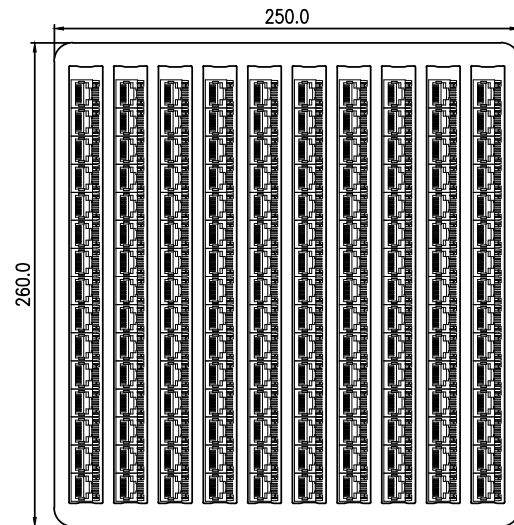

共 16 層

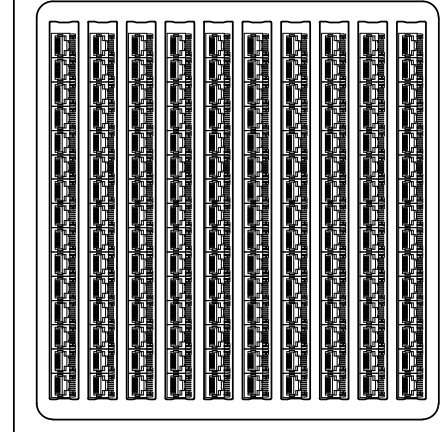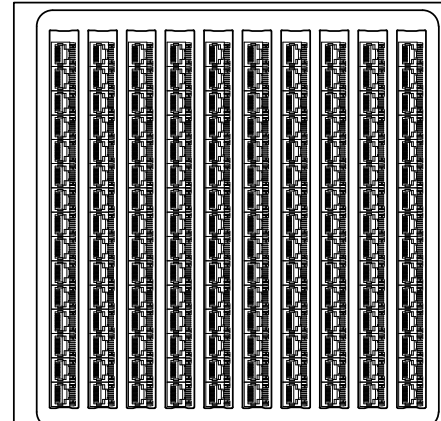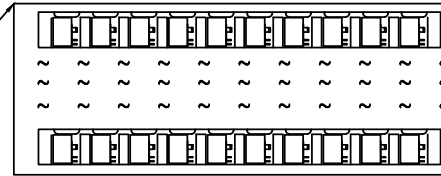

Q' TY	150 PCS/盒	产品单重/g	3.0
	32 盒/箱	净重 (NW) /kg	14.4
	4800 PCS/箱	毛重 (GW) /kg	17.8
吸塑盒型号	A07-B	尺寸	250*260*22
纸箱型号	A44	尺寸	525*250*320

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

照片框

ORDER INFORMATION

MJ11A-KXxx-0808-LF

SERIES

LEADFREE

8P8C

03:3u" GOLD

06:6u" GOLD

15:15u" GOLD

NON EAR

BLACK

DESCRIPTION: