

SPECIFICATIONS

MATERIAL:

- 1. Housing : PBT Polyester UL94V0
- 2. Color : Black
- 3. Contacts : 0.35mm Thickness Alloy Selective Gold Plating



ELECTRICAL:

- 1. Current Rating : 1.5 AMP MAX
- 2. Voltage Rating : 150 VAC MAX
- 3. Contact Resistance : 30 milliohms MAX, initial
- 4. Insulation Resistance : 500 Megohms MIN
- 5. Dielectric Withstanding Voltage : 1000 VAC, 1min

MJ12SF-KX06-0606-LF

LEADFREE

RoHS Compliant

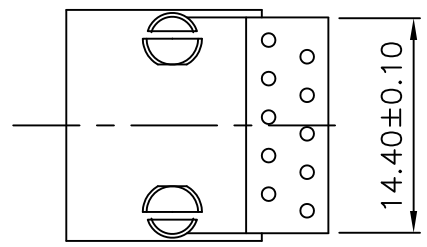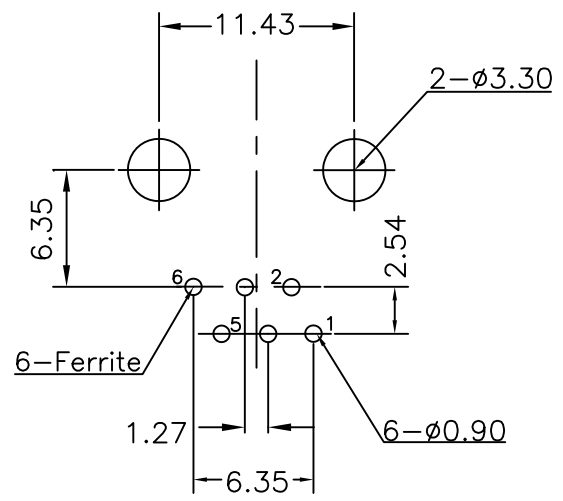

PCB LAYOUT/TOP VIEW



PART NO. MJ12SF-KX06-0606

DWG NO. MJ12SF-KX06-0606

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION: 6P Side Entry Modular Jack

FILE NO.

DRAWING BY

.X ± 0.2
.XX ±
.XXX ±
AWG

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION