




MATERIAL:

- HOUSING-PBT POLYESTER UL-94V-0 MIXED GLASS FIBER. STANDARD COLOR-BLACK
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.
- FILTER-HIGH IMPEDANCE,HIGH RESISTIVITY,FERRITE BLOCK

Impedance Characteristic:

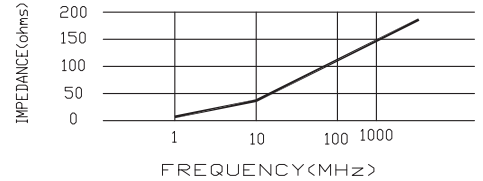

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

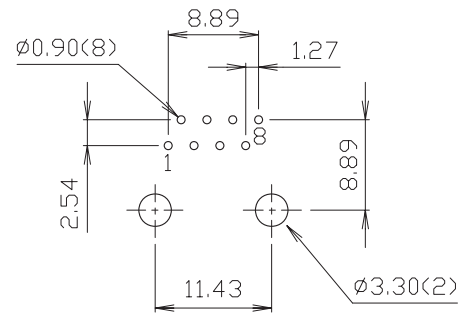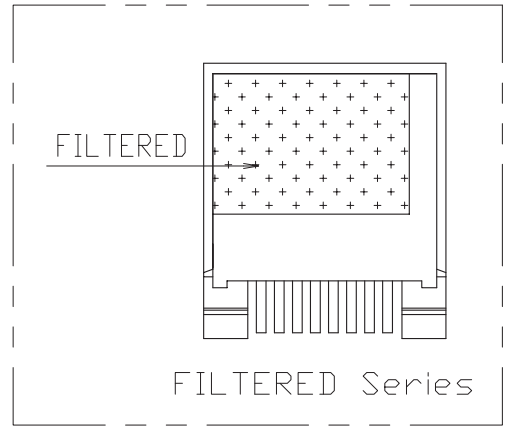

PCB LAYOUT Ref.

MJ12SF-KXxx-0808-LF  
LEADFREE  
06:06u"/GOLD  
15:15u"/GOLD  
30:30u"/GOLD  
RoHS Compliant

RoHS Compliance



PART NO. MJ12SF-KXxx-0808		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG		DESCRIP TION: 8POSITION FILTERED & FILTERLESS SHIELDLESS SIDE ENTRY PCB JACK	
DWG NO. MJ12SF-KXxx-0808		DRAWING BY					
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE

焯倫股份有限公司