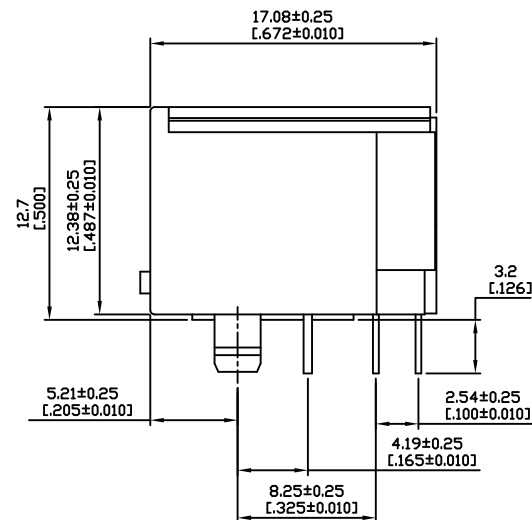
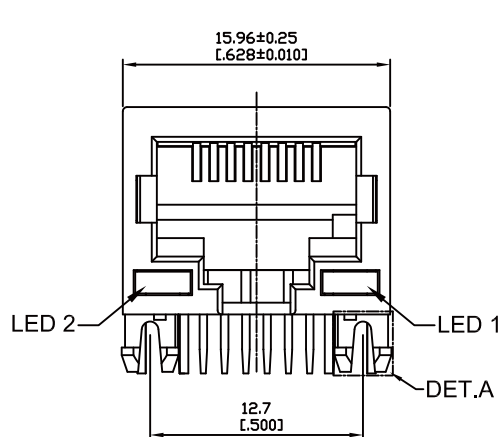


Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:



Housing: Thermoplastic UL94V-0

Contact : Selective Gold Plating


Terminal: 0.35mm Thickness Copper Alloy
Plated With Gold And Tin In Solder Area.

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
Yellow	Green	YG
No LED	Green	XG
Yellow	No LED	YX
Green	Yellow	GY
Green	Green	GG
Yellow	Yellow	YY
Orange/Green	Orange/Green	OGOG
Yellow/Green	Yellow/Green	YGYG
Orange/Green	Yellow	OGYX

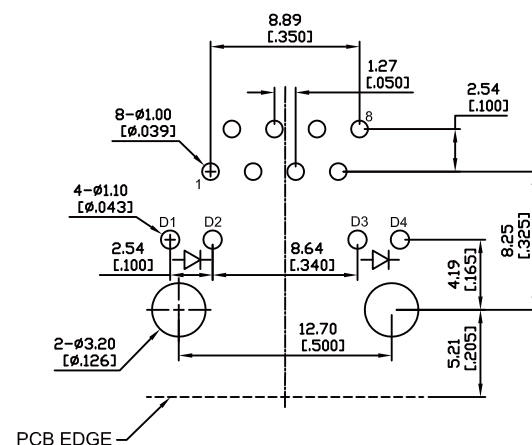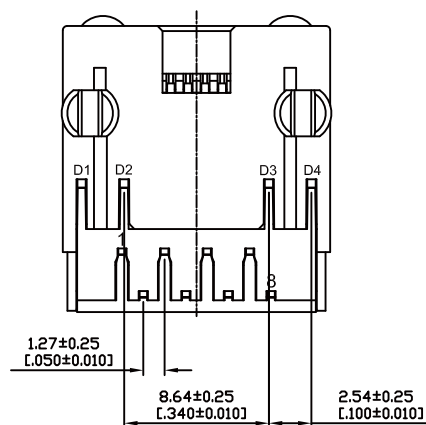

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 1.60±0.05mm

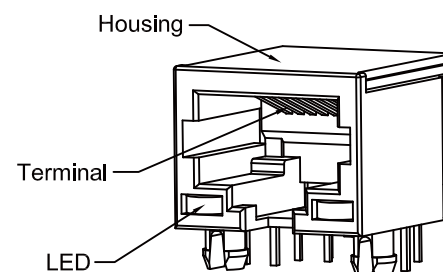

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.075
ANG ±

PPOJECTION



ORDER INFORMATION

MJ12SL-KX06xx-0808-LF

SERIES 8P8C LEADFREE

BLACK LED2 / LED1
NON EAR GY:GREEN / YELLOW
06u" GOLD YG:YELLOW / GREEN

DESCRIPTION: RJ45, Unshielded, Receptacle, Horizontal, Single port, Tht, With LED