


NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.

1. MATERIAL:
HOUSING: PA46, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK.
INSERT HOUSING: PA46, WITH GLASS FIBER,
UL 94V-0, STANDARD COLOR-BLACK
CONTACTS: PHOSPHOR BRONZE.
2. FINISH:
CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
1.27 μ m [50 μ] MIN. NICKEL UNDERPLATED
ALL OVER.
3. "C" SHOWS QIP INSPECTION POINT.

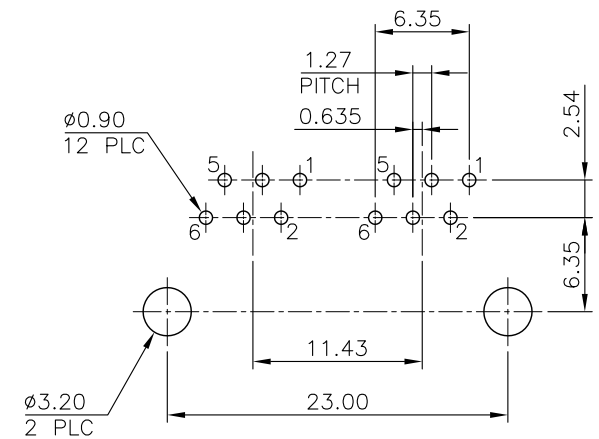

RECOMMENDED PCB LAYOUT
RECOMMENDED PCB THICKNESS: 1.6mm
TOLERANCE: ± 0.05 (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

X, \pm
.X \pm 0.25
.XX \pm 0.13
.XXX \pm 0.05
ANG \pm

照片框

ORDER INFORMATION

MJ12U16A2-KX06-0606-LF

SERIES

LEADFREE

6P6C
06u" GOLD
NON EARS
BLACK

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: 2PORTS, 6POSITION, ROUND PIN, L/P SIDE ENTRY PCG GANGED JACK