
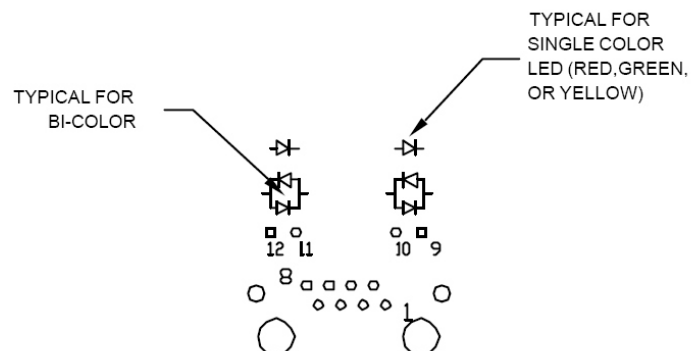
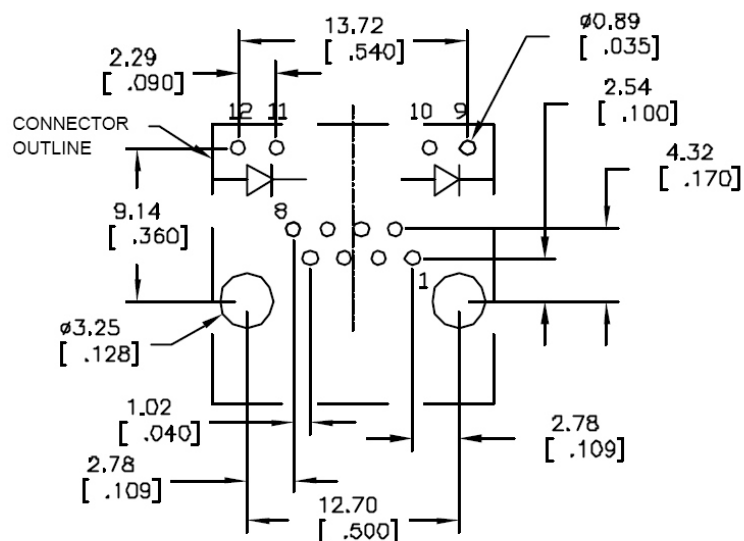



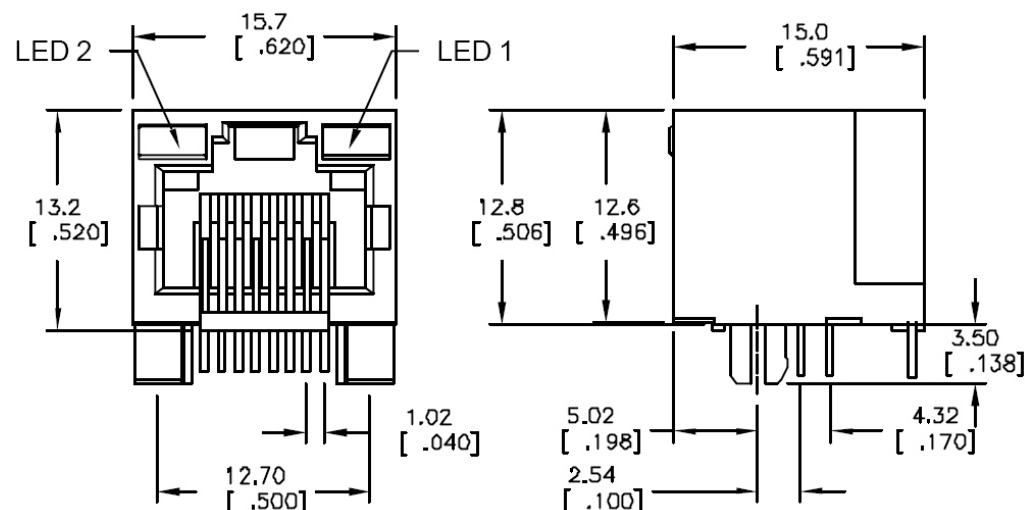

LED SCHEMATIC

Electrical Characteristics :

- Insulation Resistance : 500M Ω Min.
- Contact Resistance : 30m Ω Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Mechanical:

HOUSING: High Temp. Thermoplastic,
Yellow, UL 94V-0

Contact : Selective Gold Plating

Spring Wire : Dia 0.35mm Phosphor Bronze
Optional Gold Plating Over Nickel

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$

照片框

ORDER INFORMATION

MJ12UL-KX06RY-0808-LF

SERIES

8P8C

RED/YELLOW

06u" GOLD

NON EAR

BLACK

LEADFREE

DESCRIPTION: