
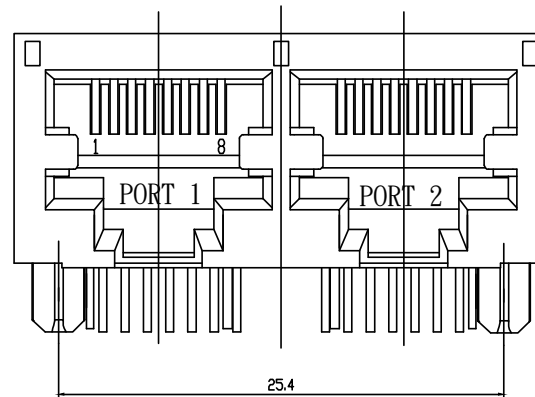


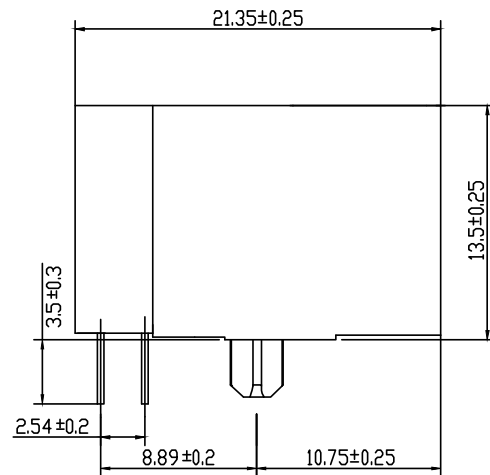



Connect Material:

Housing: Thermoplastic, PBT, UL 94V-0 BLACK

Contact/Shield: Cooper alloy

Shield Plating: Nickel

Contact Plating: Selective Gold 6u"Min

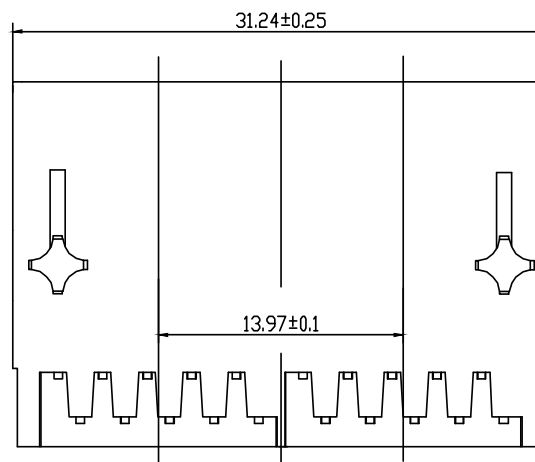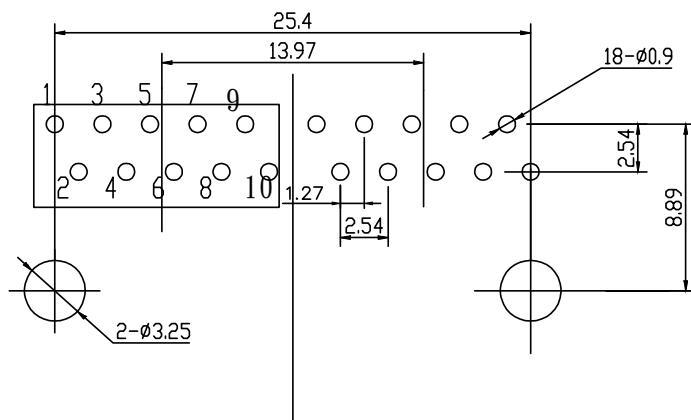

RECOMMENDED P.C.B LAYOUT (PCB THICKNESS: 1.6mm)

COMPONENT SIDE VIEW (TOLERANCE: ±0.05)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJ13T009A2-KX06-0808-LF

SERIES

8P8C


LEADFREE

06u" GOLD
NON EAR
BLACK

DESCRIPTION:

- 1.Turn Ratio(+/-2%): 1CT:1CT
- 2.Inductance OCL: 350uH Min @100KHz/0.1V DC BIAS 8mA
- 3.DCR: 1.2 OHM MAX
- 4.Insertion Loss:
-1.0dB Max @1.0-100MHz
- 5.Return Loss:
-20dB Min @1-30MHz
-16dB Min @30-60MHz
-12dB Min @60-80MHz
- 6.Cross talk:
-40dB Min @1-30MHz
-35dB Min @30-60MHz
- 7.Common Mode Rejection:
-30dB Min @1-50MHz
-20dB Min @50-150MHz
- 8.HIPOT TEST:1500V 3s 1mA MAX
- 9.OPERATING

SCHEMATICS

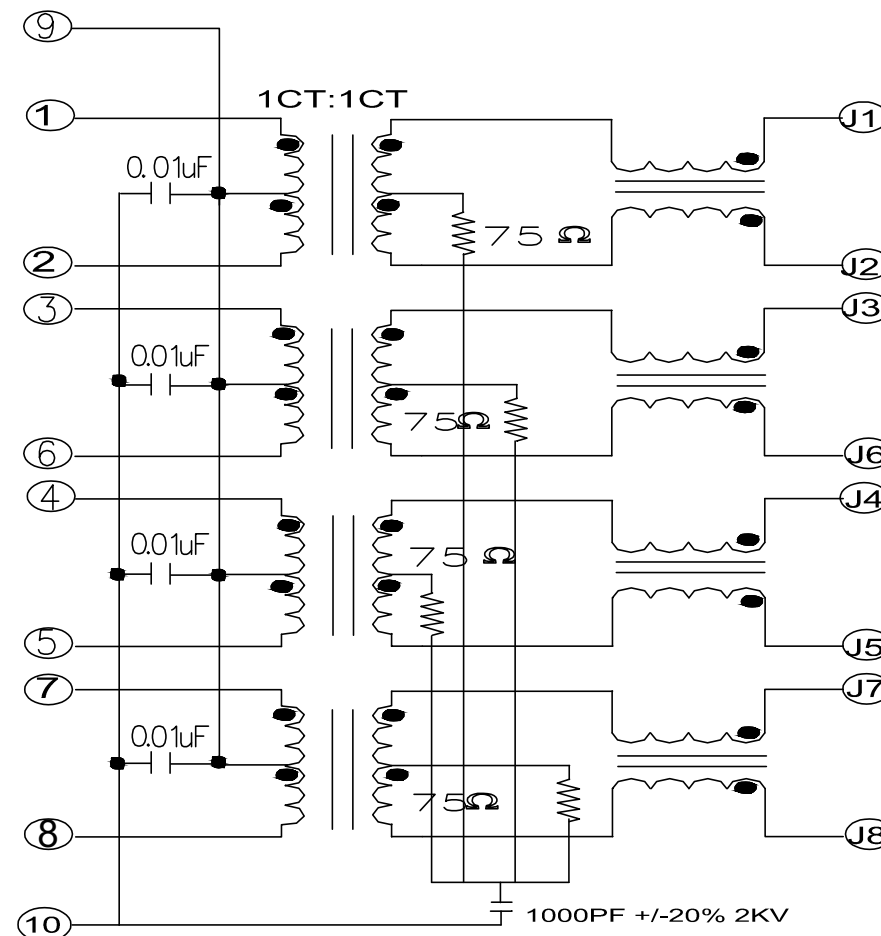

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJ13T009A2-KX06-0808-LF

SERIES

LEADFREE

8P8C
06u" GOLD
NON EAR
BLACK

DESCRIPTION: