

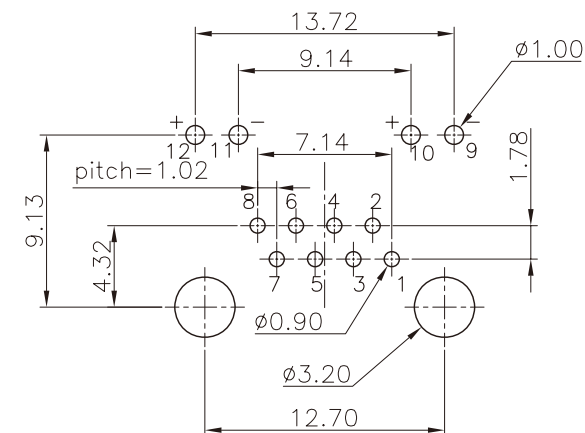


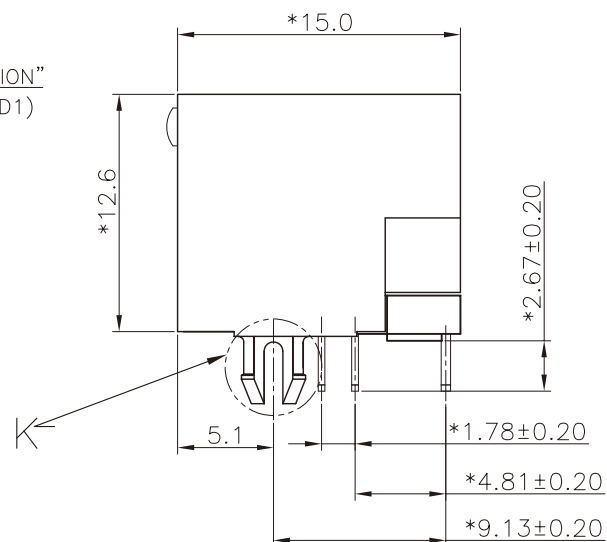


PCB LAYOUT
COMPONENT SIDE SHOWN

1. STORAGE : -40°C TO +85°C.
2. OPERATION: 0°C TO 70°C.
3. WAVE SOLDERING TEMPERATURE: 255~265°C (5~10 SECONDS)
4. COMPATIBLE WITH MODULAR PLUG CONFORMING TO
MIL-STD-883C PART 68, SUBPART F.

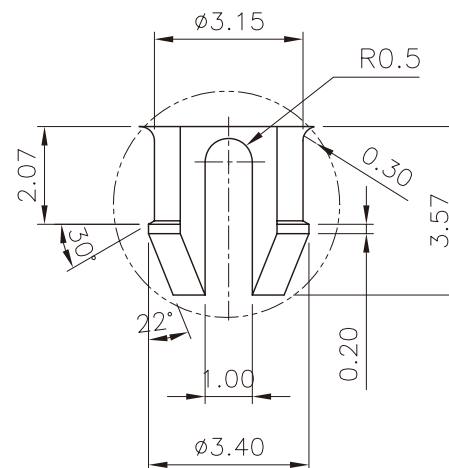

DETAIL "K"

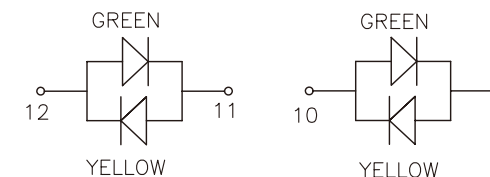

照片框

03u"GOLD
NON POST
BLACK

DESCRIPTION: