
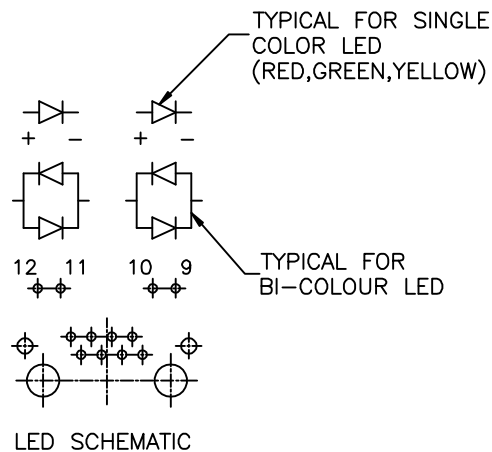


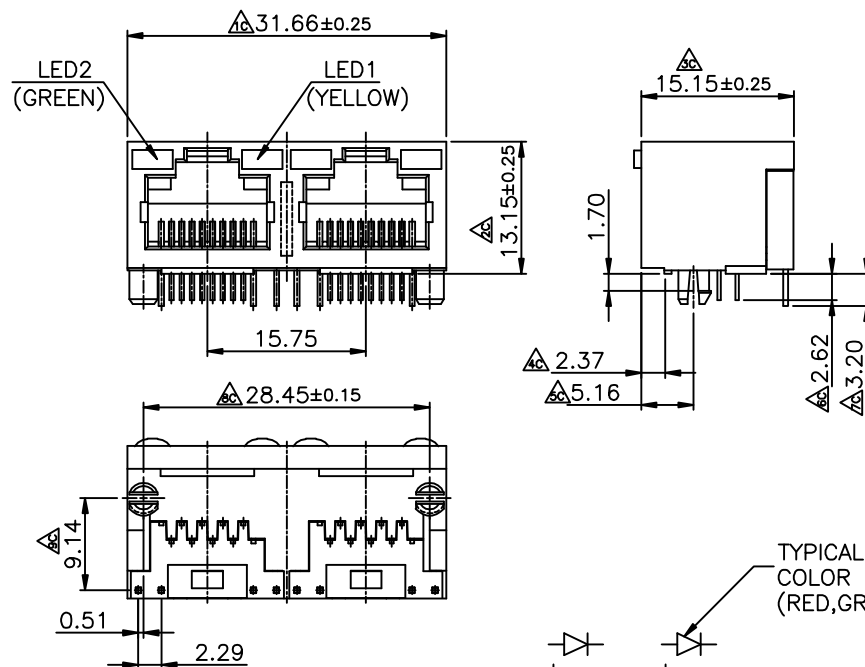

Electrical:

- 1.Voltage Rating:125 Vac Rms.
- 2.Current Rating:1.5 Amp.
- 3.Contact Resistance:40 Milliohms Max.
- 4.Insulation Resistance:1000 Megohms Min @500 Vdc.
- 5.Dielectric Strength:1000 Vac Rms 60Hz, 1Min.

Mechanical:

- 1.Operating:750 Cycles Min.

Environmental:

- 1.Storage:-40°C To +85°C.
- 2.Operation:-20°C To +75°C.

Mates With Modular Plug Conforming To FCC Part 68, Subpart F.


MATERIALS:

PLASTIC HOUSING: *ENGINEERING THERMOPLASTIC*

CONTACTS: *PHOSPHOR BRONZE*

PLATING: *GOLD PLATING OVER NICKEL IN CONTACT.*

TIN PLATING OVER NICKEL IN SOLDER AREA.

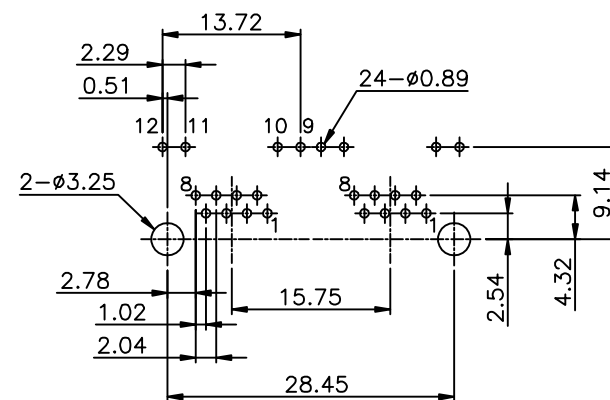

P.C.B LAYOUT/TOP VIEW

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJ13ULA2-KX06GY-0808-LF

SERIES

LEADFREE

8P8C

GREEN / YELLOW

06u" GOLD

NON POST

BLACK

DESCRIPTION: