MATERIAL:

- HOUSING–DSM STANYL TE250F6 (NYLON–46)
  HEAT DEFLCTION TEMP.290°
  BLACK COLOR, UL94V–0
- CONTACTS–0.35mm THICK PHOS–BRONZE PLATED
  WITH HARD GOLD AND TIN/LEAD IN
  SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

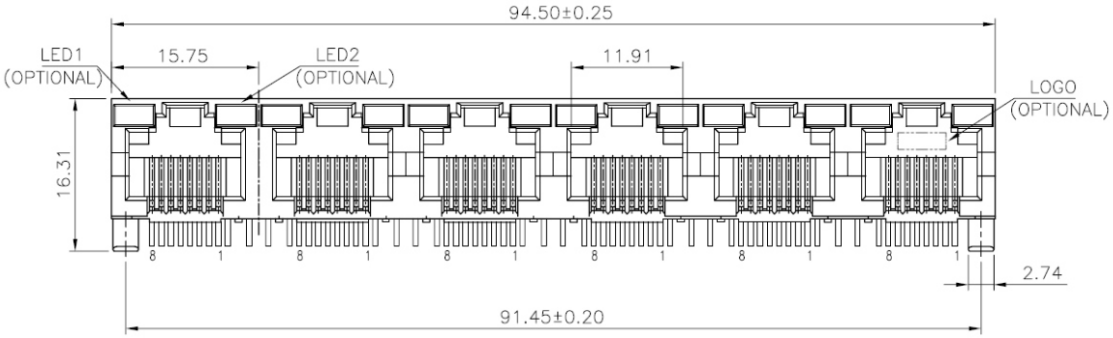

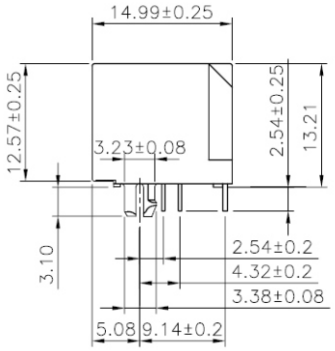

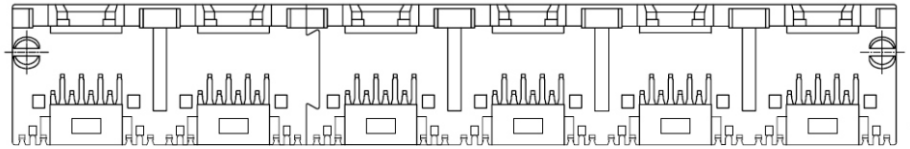

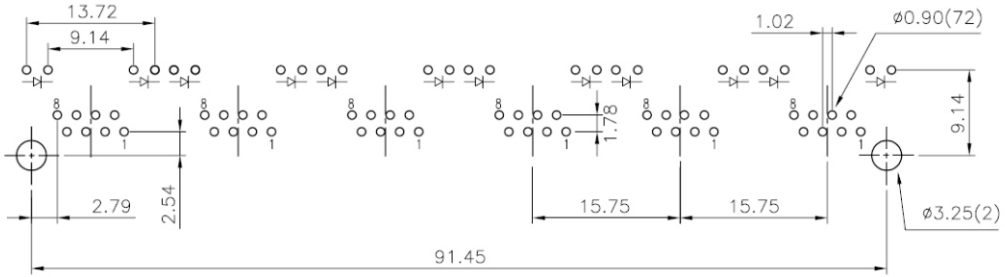

PCB Layout (Ref.)

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
		.XXX ±
DATE		ANG ±
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

MJ13ULA6-KX06xx-0808-LF

- SERIES
- BLACK / NON POST
- 06u"GOLD
- GY:GREEN / YELLOW
- YG:YELLOW / GREEN
- 8P8C
- LEADFREE

DESCRIPTION: