

NOTE:

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.




1. MATERIAL:

1.1 HOUSING: PBT, WITH GLASS FIBER,
UL94V-0, STANDARD COLOR-GRAY.

1.2 CONTACTS: PHOSPHOR BRONZE.

2. FINISH:

2.1 CONTACTS: GOLD PLATED ON ENTIRE CONTACT,
1.27 μ m [50 μ] MIN. NICKEL
UNDERPLATED OVERALL.

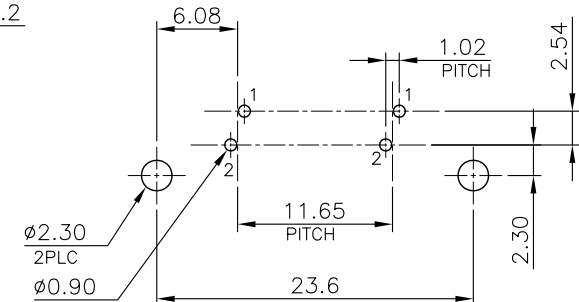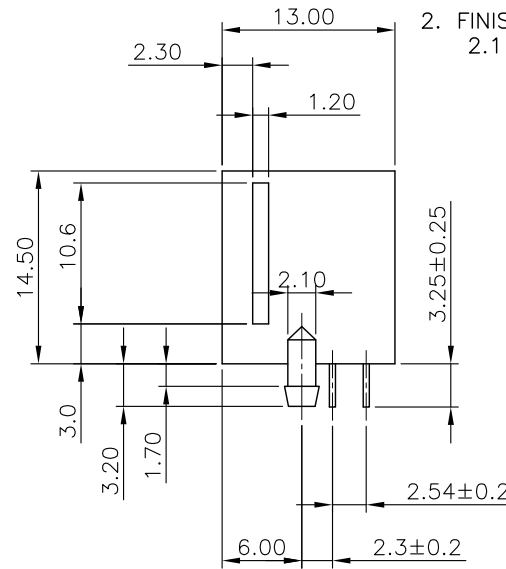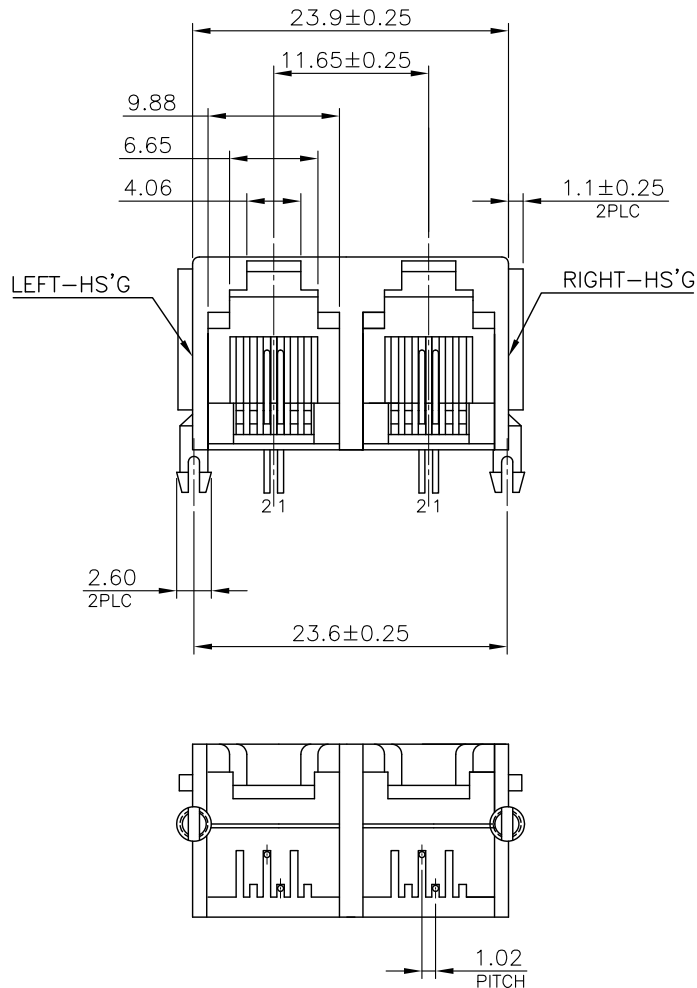

RECOMMENDED PCB LAYOUT
PCB THICKNESS: 1.6mm
TOLERANCE: ±0.05mm (TOP VIEW)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

MJ14A2-GE_{xx}-0602-LF

SERIES

LEADFREE

GRAY
EAR

6P2C
06:6u" GOLD
15:15u" GOLD
30:30u" GOLD
50:50u" GOLD

DESCRIPTION: RJ11, GANGED JACK, MINI LOW PROFILE,
SIDE ENTRY, FROM 2PORTS UP