
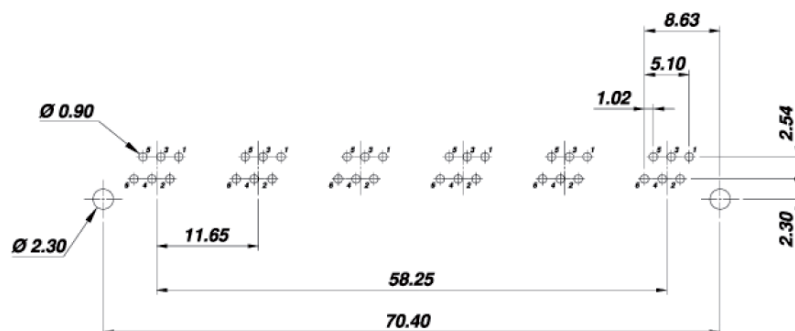
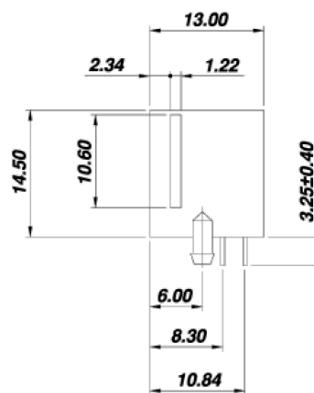


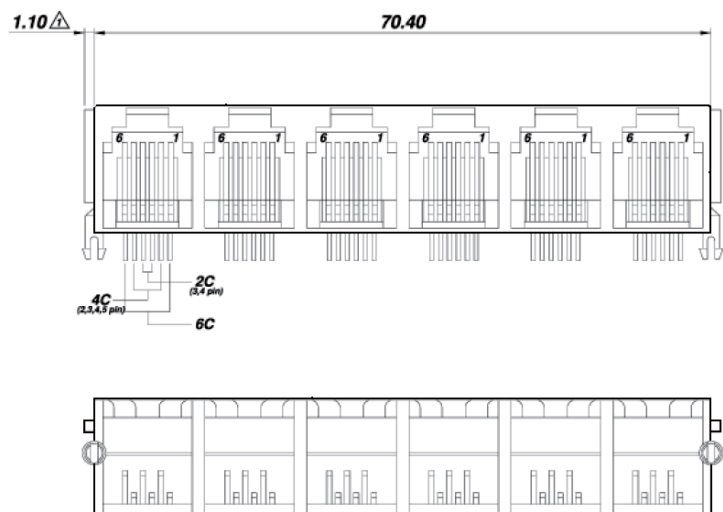

PCB LAYOUT
(Top View)

SPECIFICATION :

1. Electrical Char.

Insulation Resistance : 500M-Ohm Min.
Contact Resistance : 20milli-Ohm Max.
Rating Current : 1.5A Max.
Rating Voltage : 120V AC.
Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

Housing (Option) :

PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C

Nylon (UL 94V-0), Soldering Temperature:260°C

Color : Black / Medium Gray Color

Spring Wire:

0.45mm Dia. Phosphor bronze Gold Plating Over Nickel

Temperature Range : - 40°C / +85°C

Durability : 500 Mating cycles Min.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJ14A6-Y2K4E06-0606-LF

SERIES

LEADFREE

06u"GOLD
6P6C
EAR
YELLOW X 2 / BLACK X 4

DESCRIPTION: