



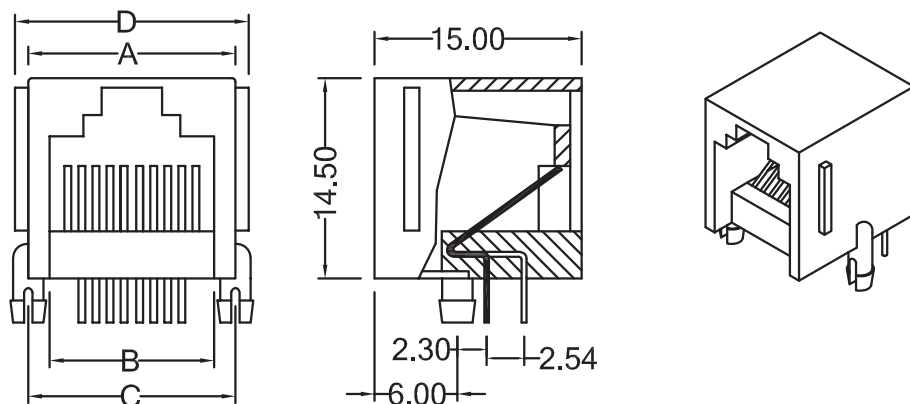


position	conductor	A	B	C	D
4P	4C	10.00	7.85	10.00	12.00
(6P)4P	4C	12.20	7.85	12.00	14.20
6P	2C/4C/6C	12.20	9.90	12.00	14.20
8P	8C	15.00	11.85	15.00	16.90
10P	10C	15.00	11.85	15.00	16.90

UNIT: m / m
TOL.: +/- 0.15

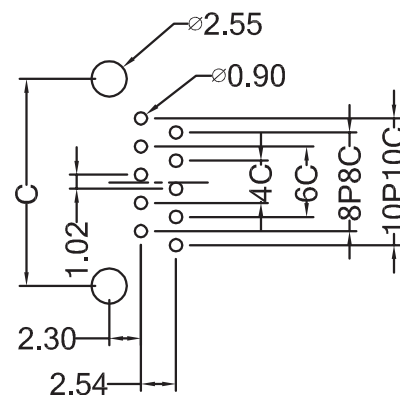

PCB LAYOUT / TOP VIEW

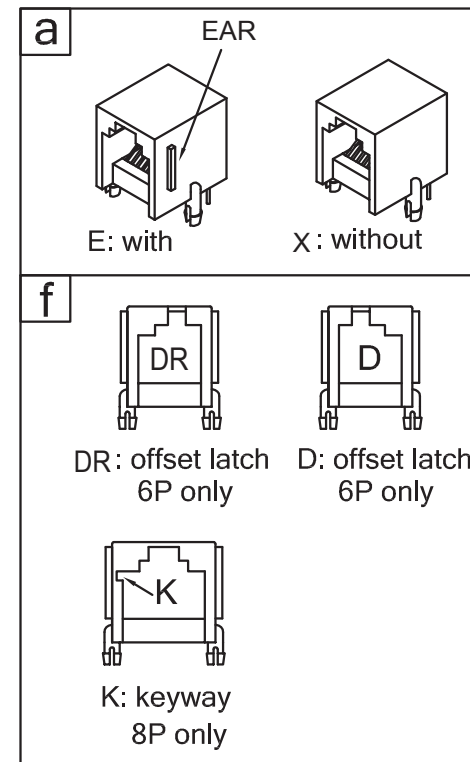

MATERIAL & FINISH

Housing: PBT. UL94V-0, gray or black

Insert: PBT. UL94V-0, (4P,6P:black)(8P,10P:gray)

Conductor:

- Round pin: 0.45 mm diameter phosphor bronze,
- Plating: Gold plated over nickel.

or

- Stamping pin: 0.35 × 0.42 mm phosphor bronze,
- Plating: Gold plated over nickel on contact area,
- Tin plated over nickel on solder area.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

MJ14L-xy06-xxyyDx-LF

SERIES

G:GRAY
K:BLACK

06u"
E:EAR
X:NON EAR

xxPyyC

LEADFREE

DR: 6P ONLY TYPE
D: 6P ONLY TYPE
K: 8P ONLY TYPE

DESCRIPTION: