

SPECIFICATIONS




MATERIAL:

1. Housing : PBT Polyester UL94V0
2. Color : Black
3. Contacts : 0.45mm Diameter Phos-Bronze Plated With Hard Gold

ELECTRICAL:

1. Current Rating : 1.5 AMP MAX
2. Voltage Rating : 150 VAC MAX
3. Contact Resistance : 20 milliohms MAX, initial
4. Insulation Resistance : 500 Megohms MIN
5. Dielectric Withstanding Voltage : 1000 VAC, 1min

UL. CUL NO.: E166003

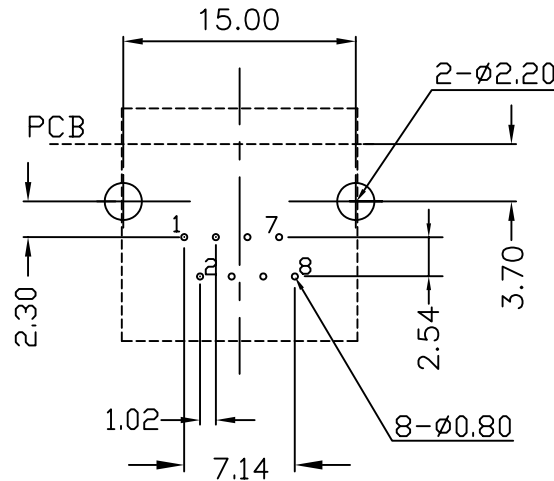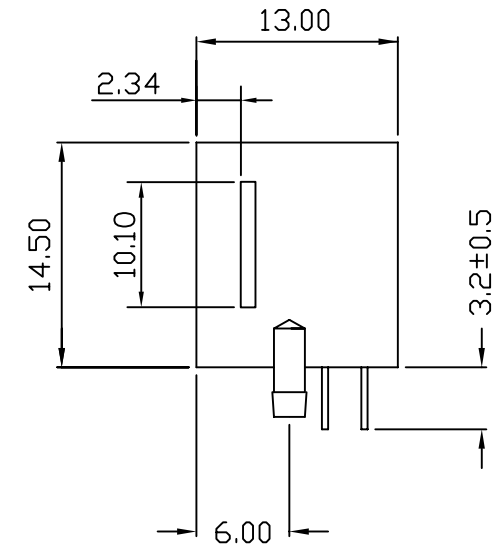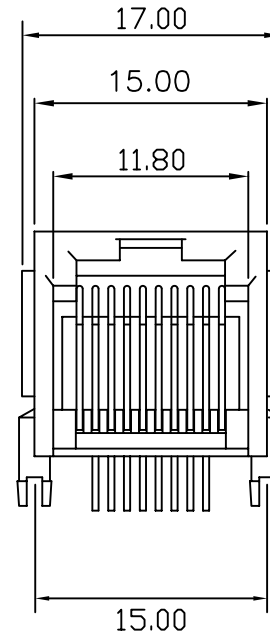

PCB LAYOUT/TOP VIEW



PART NO. **MJ14S-KE06-0808**

DWG NO. **MJ14S-KE06-0808**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2

.XX±

.XXX±

AWG

DESCRIPTION: 10P Mini Low Profile Modular Jack

AREA

REVISIONS

HK

DATE

煜倫股份有限公司